


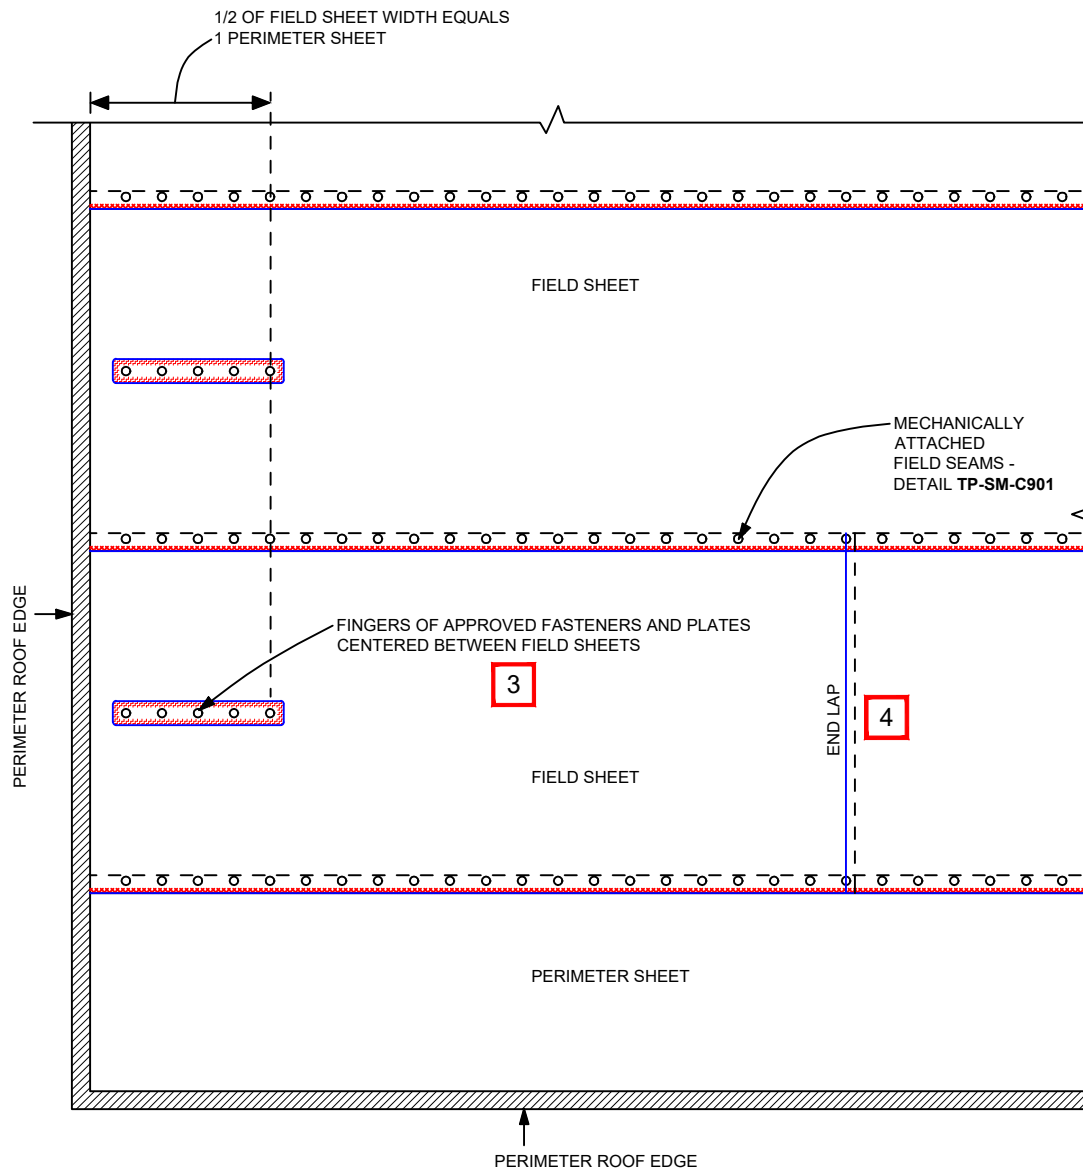

- 1 ALL PROJECTS UP TO 20 YEARS WARRANTY REQUIRE AT LEAST 1 PERIMETER SHEET, AND ALL PROJECTS EXCEEDING 20YEARS REQUIRE AT LEAST 2.
REFER TO SPECIFICATIONS FOR REQUIRED NUMBER OF PERIMETER SHEETS, ACCEPTABLE SHEET WIDTHS (BOTH FIELD AND PERIMETER), AND FASTENER SPACING BASED ON THE PROJECT WARRANTY REQUIREMENTS.
- 2 FOR ROOF PERIMETER "ZONES", REFER TO DETAIL TP-LO-C1100
- 3 FINGERS PENETRATING THE MEMBRANE MUST BE OVERLAID WITH 6" WIDE TPO REINFORCED MEMBRANE.
- 4 FASTENERS AND PLATES ARE NOT REQUIRED AT END LAPS. REFER TO DETAIL TP-SM-C900
- 5 EHD FASTENERS WITH INDUCTION WELD PLATES ARE APPROVED FOR WOOD, AND STEEL (18-22 GA.) SUBSTRATES, REFER TO SPECIFICATIONS FOR ACCEPTABLE PULLOUT VALUES, OR FOR OTHER FASTENERS AND COMPATIBLE SUBSTRATES.
- 6 FOR FM, OR OTHER CODE RELATED REQUIREMENTS, CONTACT MULEHIDE TECHNICAL
- 7 METAL RETROFIT SYSTEMS EXCEEDING 20 YEARS REQUIRE MECHANICAL ATTACHMENT OF FIELD MEMBRANE TO PURLINS. REFER TO DETAILS TP-LO-C1108, TP-LO-C1109, OR TP-LO-C1110.

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (MECHANICALLY ATTACHED)

MULEHIDE

TPO: "FINGERS" FOR PERIMETER SHEETS

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY** 1 7

DETAIL NO.:

TP-LO-C1105

REVISION DATE: 8/24/2026