



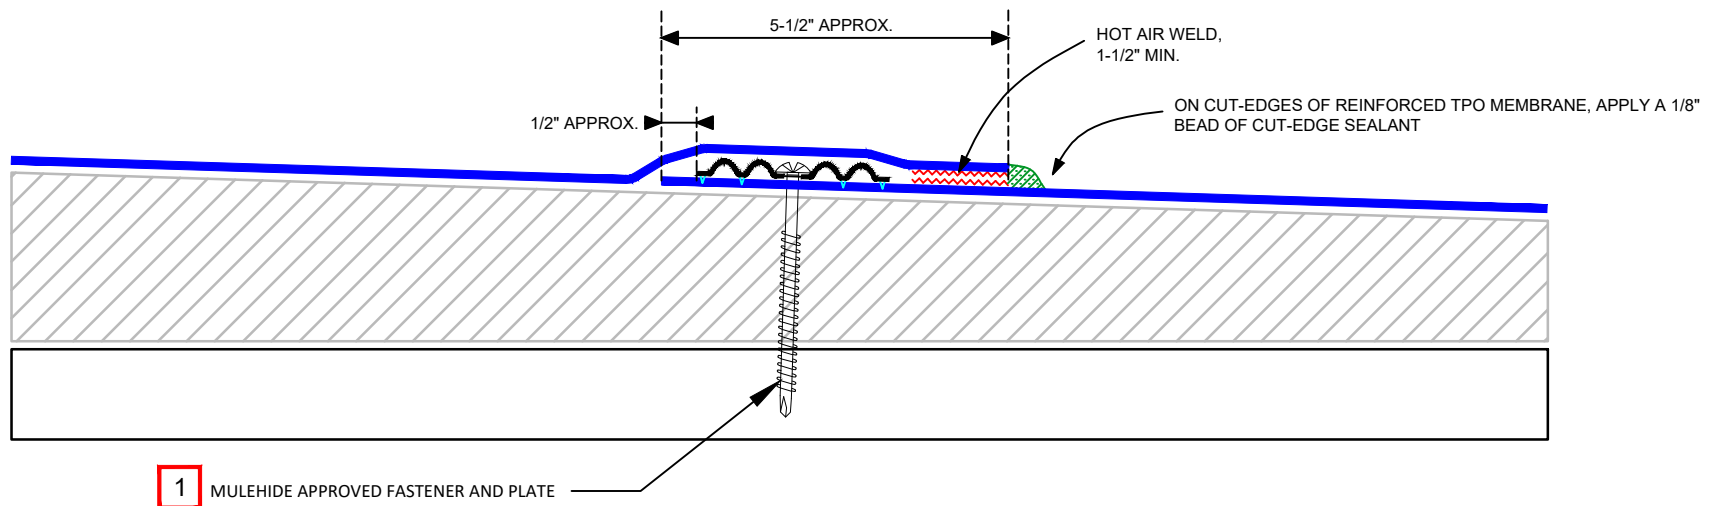

- 1 EHD FASTENERS WITH 2.4\" SEAM PLATES ARE APPROVED FOR WOOD, AND STEEL (18-22 GA.) SUBSTRATES, REFER TO SPECIFICATIONS FOR ACCEPTABLE PULLOUT VALUES, OR FOR OTHER FASTENERS AND COMPATIBLE SUBSTRATES.
- 2 A ROBOTIC WELDER MUST BE USED TO COMPLETE ALL FIELD SEAMS LONGER THAN 5 FT CONTINUOUS ON WARRANTED PROJECTS.
- 3 METAL RETROFIT SYSTEMS EXCEEDING 20 YEARS REQUIRE MECHANICAL ATTACHMENT OF FIELD MEMBRANE TO PURLINS. REFER TO DETAILS **TP-LO-C1108**, **TP-LO-C1109**, OR **TP-LO-C1110**.

PRE-PRINTED LINE FOR
MEMBRANE OVERLAP

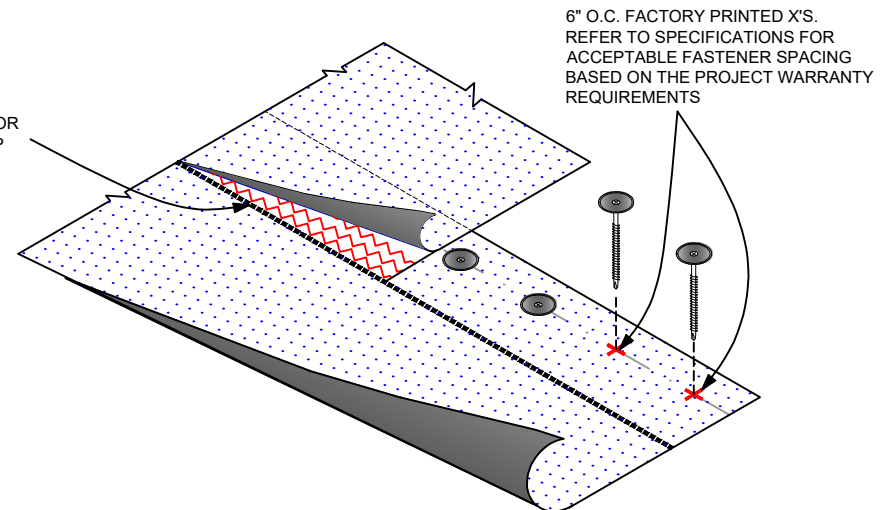

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (MECHANICALLY ATTACHED)

MULEHIDE

TPO MECHANICALLY ATTACHED FIELD SEAM

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY** 3

DETAIL NO.:
TP-SM-C901

REVISION DATE: 8/24/2026