




DensDeck® ProFast Prime Roof Board

PRODUCT DATA SHEET

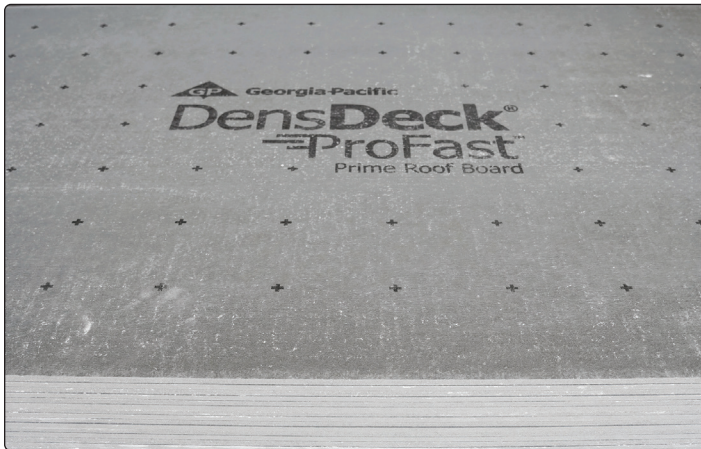

DESCRIPTION

DensDeck ProFast Prime 3/8" roof board is an innovative, lightweight roofing solution designed to enhance performance, efficiency, and cost savings in roofing applications. Approximately 20% lighter than 1/2" DensDeck Prime Roof Board, it offers enhanced maneuverability, making easier to transport, handle and install without compromising strength, durability, or dimensional stability.

Specifically engineered for roof systems with the cover board mechanically attached, and the membrane fully adhered, DensDeck ProFast Prime Roof Board offers exceptional resistance to fire, wind uplift, punctures, and hail. Based on current testing, DensDeck ProFast Prime Roof Boards in single-ply adhered systems have shown a 25% - 75% reduction in the number of fasteners and plates required, when compared to assemblies using 1/2" DensDeck Prime on FM tested assemblies.

FEATURES AND BENEFITS

- 20% lighter than 1/2" DensDeck Prime
- Reduces number of fasteners needed when compared to assemblies with 1/2" DensDeck Prime
- 25% more product per truck

PANEL CHARACTERISTICS

- 4' x 8' with a thickness of 3/8"

APPLICATIONS

DensDeck ProFast Prime Roof Board is compatible with many types of roofing systems, including modified asphalt, single-ply, metal systems, recover board, as well as an overlayment for polyisocyanurate and polystyrene insulation. DensDeck ProFast Prime Roof Board can also be used as a form board for poured gypsum concrete decks in roof applications.

TYPICAL PHYSICAL PROPERTIES

| Property | 3/8" (9.5 mm) |
|--|---|
| Thickness, Nominal | 3/8" (9.5 mm) ±1/32" (.8 mm) |
| Width, Standard | 4' (1219 mm) ±1/8" (3 mm) |
| Length, Standard | 8' (2438 mm) ±1/4" (6.4 mm) |
| Weight Nominal, lbs/sq ft (kg/m ²) ⁷ | 1.64 (8) |
| Surfacing | Fiberglass Mat with Non-Asphaltic Coating |
| Flexural Strength, Parallel, bf. Min. (N) | ≥100 (444) |
| Flute Spanability | 5" (127 mm) |
| Permeance, perms (ng/Pa•S•m ²) | >30 (>1710) |
| R Value ⁴ , ft ² •°F•hr/BTU (m ² K/W) | 0.33 |
| Linear Variation with Change in Temp., in/in °F (mm/mm/°C) | 8.5 x 101 (15.3 x 101) |
| Linear Variation with Change in Moisture | 6.25 x 101 |
| Water Absorption, % max | 5 |
| Compressive Strength, psi Nominal | 880 |
| Surface Water Absorption, grams, Nominal | 1 |
| Mold Resistance | 10 (Highest Possible) |
| Product Standard Compliance | ASTM C1177 |

INSTALLATION

DensDeck ProFast Prime Roof Board is manufactured to act with a properly designed roof system following good roofing practices. The actual use of DensDeck ProFast Prime Roof Board as a roofing component in any system or assembly is the responsibility of the roofing system's design authority. Consult with the appropriate system manufacturer and/or design authority for system and assembly specifications and instructions on applying other products to DensDeck ProFast Prime Roof Board.

The need for a separator sheet between the DensDeck ProFast Prime Roof Board and the roofing membrane must be determined by the roof membrane manufacturer or roofing system designer.

DensDeck ProFast Prime Roof Board should not be subjected to abnormal or excessive loads or foot traffic, such as, but not limited to, use on plaza decks or under steel-wheeled equipment that may fracture or damage the panels. Provide suitable roofing system protection when required.

HANDLING AND USE – CAUTION

This product contains fiberglass facings, which may cause skin irritation. Dust and fibers produced during the handling and installation of the product may cause skin, eye, and respiratory tract irritation. Avoid breathing dust and minimize contact with skin and eyes. Wear long-sleeve shirts, long pants, and eye protection. Always maintain adequate ventilation. Use a dust mask or NIOSH/MSHA-approved respirator as appropriate in dusty or poorly ventilated areas.



DensDeck® ProFast Prime Roof Board

PRODUCT DATA SHEET

MOISTURE MANAGEMENT

DensDeck ProFast Prime Roof Board, like other components used in roofing systems, must be protected from exposure to moisture before, during, and after installation.

Remove the plastic packaging from all DensDeck ProFast Prime Roof Board products immediately upon receipt of delivery. Failure to remove the plastic packaging may result in entrapment of condensation or moisture. Boards stored outside must be stored level and off the ground and protected by a breathable waterproof covering. Provide means for air circulation around and under stored bundles and cover the same day as they are installed.

Avoid application of DensDeck ProFast Prime Roof Board products during rain, heavy fog, and any other conditions that may deposit moisture on the surface, and avoid the overuse of non-vented, direct-fired heaters during winter months. When roofing systems are installed on newly poured concrete or lightweight concrete decks, or when re-roofing over an existing concrete deck, a vapor barrier should be installed above the concrete to retard the migration of water from the concrete into the roof assembly.

Moisture vapor movement by convection must be eliminated, and the flow of water by gravity through imperfections in the roof system must be controlled. After a leak has occurred, no condensation on the upper surface of the system should be tolerated, and the water introduced by the leak must be dissipated to the building's interior in a minimum amount of time.

Although DensDeck ProFast Prime Roof Board products are engineered with fiberglass facings and high-density gypsum cores, the presence of free moisture can have a detrimental effect on the performance of the product and the installation of roofing membranes. For example, adhesives for single-ply membranes may not dry properly. Moisture accumulation may also significantly decrease wind uplift and vertical pull resistance in the system or assembly. DensDeck ProFast Prime Roof Board products containing excessive free moisture content may need to be evaluated for structural stability to ensure wind uplift performance.

CODES AND COMPLIANCES

Fire Resistance Classifications

- UL 790
- UL 1256
- FM Class 1
- Type X
- UL Fire Resistance Ratings Type DD

PROTECTION & SAFETY

MuleHide maintains safety data sheets on all of its non-exempt products. Safety data sheets contain health and safety information for your development of appropriate product handling procedures to protect your employees and customers. MuleHide's safety data sheets should be read and understood by all of your supervisory personnel and employees before using MuleHide products in your facilities.

ADDITIONAL INFORMATION

The information given on this PDS is subject to change without notice. Always check the MuleHide website at www.mulehide.com for the latest information, changes and updates or contact MuleHide at 800-786-1492.

DensDeck is a registered trademark of Georgia-Pacific Gypsum LLC.

DISCLAIMER

The statements provided concerning the material shown are intended as a guide for material usage and are believed to be true and accurate at the time of printing. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. ("MuleHide"). Since the manner of use is beyond our control, MuleHide does not authorize anyone to make any warranty of merchantability or fitness for any particular purpose or any other warranty, guarantee or representation, expressed or implied, concerning this material. This product may be eligible for a MuleHide warranty, please check the MuleHide website at www.mulehide.com or contact MuleHide directly at 800-786-1492 for details. Buyer and user accept the product under these conditions and assume the risk of any failure, any injury to person or property (including that of the user), loss or liability resulting from the handling, storage or use of the product whether or not it is handled, stored or used in accordance with the directions or specifications. MuleHide must be notified in writing of any claims and be given the opportunity to inspect the alleged failure before repairs are made.