



MuleHide Zamac Nailin™ Roofing Fastener

General-Purpose Anchor



PRODUCT DATA SHEET

DESCRIPTION

The MuleHide Zamac Nailin™ Roofing Fastener is a nail-drive, general-purpose anchor that can be used in concrete, block, brick, or stone. Applications include attachment of roof membrane terminations, roof flashing, and mechanical/electrical fixtures. It features an anchor body formed from a corrosion-resistant zamac alloy with a carbon steel drive nail. The mushroom head provides a tamper-proof installation. Note: The Zamac Nailin is not recommended for overhead, life-safety or sustained tensile loading applications unless special considerations are given to the allowable loads.


PACKAGING

- 1,000 Count Carton

BASIC USES

Use with All Purpose Bar, TB-75, TB-90, and TB-125 termination bars.

PRODUCT SPECIFICATIONS

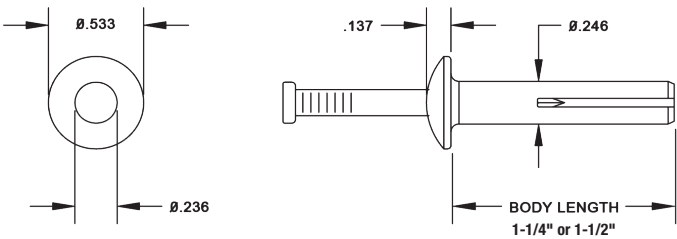

MATERIAL SPECIFICATIONS

- Drive Nail: ANSI 1018 Carbon Steel
- Anchor Body: Zamac Alloy
- Nail Plating: ASTM B633, SC1, Type III, (Fe/Zn 5)

INSTALLATION GUIDELINES

ANSI Drill Bit Size: 3/16" for 3/16" dia. anchor; 1/4" for 1/4" dia. anchors. Fixture Clearance Hole: 1/4" for 3/16" dia. anchor; 5/16" for 1/4" dia. anchors. Pre-drill a hole into the base material using the proper diameter drill bit that meets the requirement of ANSI Standard B212.15. The hole must be a minimum of 1/4" deeper than the required embedment. Insert the anchor through the fixture. Drive the nail into the anchor body to expand it. Be sure the head is seated firmly against the fixture and that the anchor is at the proper embedment. Take care not to overdrive.

PROTECTION & SAFETY

MuleHide maintains safety data sheets on all of its non-exempt products. Safety data sheets contain health and safety information for your development of appropriate product handling procedures to protect your employees and customers. MuleHide's safety data sheets should be read and understood by all of your supervisory personnel and employees before using MuleHide products in your facilities.

ADDITIONAL INFORMATION

The information given on this PDS is subject to change without notice. Always check the MuleHide website at www.mulehide.com for the latest information, changes and updates or contact MuleHide at 800-786-1492.

PRODUCT SELECTION				
Item ID#	Diameter	Body Length	Package Qty.	Package Weight
08MHZAM113	1/4" (6.4mm)	1-1/4" (31.8mm)	1,000/Carton	22.9 lbs.
08MHZAM114	1/4" (6.4mm)	1-1/2" (38.1mm)	1,000/Carton	26 lbs.

DISCLAIMER

The statements provided concerning the material shown are intended as a guide for material usage and are believed to be true and accurate at the time of printing. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. ("MuleHide"). Since the manner of use is beyond our control, MuleHide does not authorize anyone to make any warranty of merchantability or fitness for any particular purpose or any other warranty, guarantee or representation, expressed or implied, concerning this material. This product may be eligible for a MuleHide warranty, please check the MuleHide website at www.mulehide.com or contact MuleHide directly at 800-786-1492 for details. Buyer and user accept the product under these conditions and assume the risk of any failure, any injury to person or property (including that of the user), loss or liability resulting from the handling, storage or use of the product whether or not it is handled, stored or used in accordance with the directions or specifications. MuleHide must be notified in writing of any claims and be given the opportunity to inspect the alleged failure before repairs are made.