



LWG Fasteners

Lightweight Gypsum Fastener



PRODUCT DATA SHEET

DESCRIPTION


LWG Fasteners are engineered to secure base sheets, insulation, or cover boards to lightweight insulating concrete (LWIC) and gypsum decks. The LWG Fastener features an exclusive thread design engineered for exceptional pullout. When used in conjunction with our LWG 3" Metal Plate, multiple fasteners can be installed to achieve the required minimum pullout.

APPROPRIATE ACCESSORIES

LWG 3" Metal Plates are designed to be used with LWG Fasteners.

SPECIFICATIONS

Property	Standard	Average Ultimate Value
Wire	--	SAE C-1022, heat treated wire
Coating	--	TRU-Kote™ Epoxy E-Coat
Corrosion Resistance	FM 4470, DIN 50018	<15% Red Rust After 30 Cycles
Tensile Strength	ASTM F606-10	2,000 lbf.
Shear Strength	AISI S904	1,357 lbf

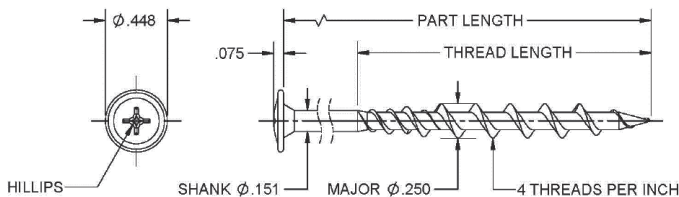

PRODUCT SELECTION

Screw Length	Thread Length	Pieces/Box	Weight/Box
2-1/4"	2-1/8"	1000	16.0 lbs.
3-1/4"	2-1/8"	1000	20.2 lbs.
4-1/4"	2-1/8"	1000	24.4 lbs.
5-1/4"	2-1/8"	1000	28.6 lbs.
6-1/4"	2-1/8"	1000	32.8 lbs.
7-1/4"	2-1/8"	500	19.2 lbs.
8-1/4"	2-1/8"	500	21.3 lbs.

PERFORMANCE DATA

Substrate	Average Ultimate Pullout
Aggregate Lightweight Insulating Concrete (LWIC) (63 pcf density, 370 psi compressive strength)	190 lbs (one fastener per plate)
Cellular Lightweight Insulating Concrete (LWIC) (41 pcf density, 290 psi compressive strength)	320 lbs (one fastener per plate)
Gypsum (93 pcf density, 340 psi compressive strength)	350 lbs (one fastener per plate)

*The performance specifications published in this MuleHide data sheet are based on controlled laboratory tests and are intended as a guideline only. They are not guaranteed in any way by MuleHide or its supplier, since the building design, engineering and construction (including workmanship and materials) are beyond our control.

INSTALLATION INSTRUCTIONS

Pull tests are required for this fastener, project specific tests will provide the number of fasteners required to be installed in the LWG Plate, in a predetermined pattern to meet the minimum required value. Results of the test and acceptance by the MuleHide technical department must be completed prior to proceeding with installation when a MuleHide warranty is required.

1. For LWIC Decks (aggregate and cellular) and gypsum decks: using the #2 Phillips drive bit provided and a 0-1500 rpm variable speed screw gun with adjustable torque control, install the LWG Fastener and LWG 3" Metal Plate through the approved base sheet, insulation or cover board and into the approved deck.
2. The LWG Fastener shall penetrate the approved deck a minimum of 2".
3. Care should also be taken to avoid stripping out the LWG Fastener by overdriving the LWG Fastener into the LWIC or Gypsum deck.
4. Orient the LWG Fastener perpendicular to the deck, taking care not to overdrive the LWG Fastener and damage the base sheet, insulation, or cover board.
5. Refer to detail MHU-LWG-1 for approved patterns when multiple fasteners are required to meet the minimum pullout criteria.

PROTECTION & SAFETY

MuleHide maintains safety data sheets on all of its non-exempt products. Safety data sheets contain health and safety information for your development of appropriate product handling procedures to protect your employees and customers. MuleHide's safety data sheets should be read and understood by all of your supervisory personnel and employees before using MuleHide products in your facilities.

ADDITIONAL INFORMATION

On projects where a MuleHide standard or premium warranty is requested, an authorized MuleHide representative shall inspect all completed work.

The information given on this PDS is subject to change without notice. Always check the MuleHide website at www.mulehide.com for the latest information, changes and updates or contact MuleHide at 800-786-1492.

DISCLAIMER

The statements provided concerning the material shown are intended as a guide for material usage and are believed to be true and accurate at the time of printing. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. ("MuleHide"). Since the manner of use is beyond our control, MuleHide does not authorize anyone to make any warranty of merchantability or fitness for any particular purpose or any other warranty, guarantee or representation, expressed or implied, concerning this material. This product may be eligible for a MuleHide warranty, please check the MuleHide website at www.mulehide.com or contact MuleHide directly at 800-786-1492 for details. Buyer and user accept the product under these conditions and assume the risk of any failure, any injury to person or property (including that of the user), loss or liability resulting from the handling, storage or use of the product whether or not it is handled, stored or used in accordance with the directions or specifications. MuleHide must be notified in writing of any claims and be given the opportunity to inspect the alleged failure before repairs are made.