




# PVC Walkway Roll

## Membrane Protection

### PRODUCT DATA SHEET

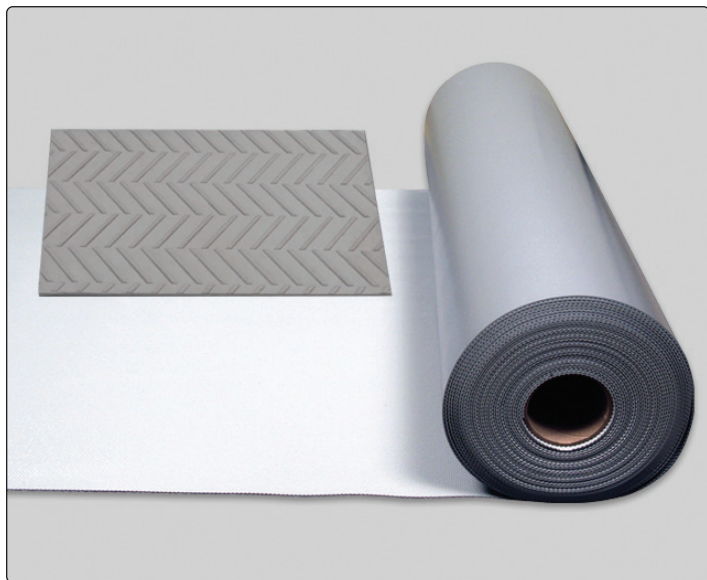

#### DESCRIPTION

MuleHide PVC Walkway Rolls incorporate an aggressive, non-slip, herringbone tread pattern of PVC material that offers excellent tear and puncture resistance.

#### BASIC USES

The MuleHide PVC Walkway Roll is designed to protect the PVC membrane in those areas exposed to repetitive foot traffic and other hazards. MuleHide specifications require the use of such a product in walkway concentration points (i.e., roof hatches, access doors, rooftop ladders, etc.) regardless of traffic frequency. Walkways must also be installed if regular maintenance (once a month or more) is necessary to service rooftop equipment.

#### COLORS

- Gray

#### PACKAGING

- Size: 36" wide x 60' long (91.4 cm x 18.3 m)
- Weight: 114 lbs. per roll
- Thickness: 80-mils, 110-mils
- Store rolls in a clean, cool, dry location

#### INSTALLATION

##### Surface Preparation

- If membrane or walkway roll has been exposed for over 7 days, use PVC Weathered Membrane Cleaner and a Scotch-Brite Pad to prepare the area to be welded to the walkway material. Allow membrane cleaner to dry completely.

##### Application

- Position the walkway in desired location. Cut walkway rolls into maximum 10 (ten) foot lengths and position with a minimum 1-inch gap between adjacent pieces to allow for water drainage. Cut the walkway roll to allow for a minimum 4-inch gap over any field splice. (Since the attachment of the walkway roll is permanent, this will allow access to the field seams for future repairs).
- Using an automated welder, weld all four sides of the walkway material to the membrane. (Welding temperature and speed is typically the same as used for the roofing membrane). A hand welder may be used but productivity will be reduced.

Review MuleHide Specifications and Details for additional information.

#### PRECAUTIONS

- Walkway rolls are a maintenance item and are not covered under the roofing warranty.
- This product is intended to be utilized as a walkway only and is not designed as a perimeter warning line or substitution for ballast. Walkway rolls cannot be positioned within 10-feet (3 m) of the roof perimeter.
- Allowing walkway to relax and warm up in the sun light will facilitate installation.

#### PROTECTION & SAFETY

MuleHide maintains safety data sheets on all of its non-exempt products. Safety data sheets contain health and safety information for your development of appropriate product handling procedures to protect your employees and customers. MuleHide's safety data sheets should be read and understood by all of your supervisory personnel and employees before using MuleHide products in your facilities.

#### LEED INFORMATION

Pre-consumer Recycled Content	40%
Manufacturing Location	Mountain Top, PA
Solar Reflectance Index (SRI), Initial	NA



# PVC Walkway Roll

## Membrane Protection

### PRODUCT DATA SHEET

#### ADDITIONAL INFORMATION

On projects where a MuleHide standard or premium warranty is requested, an authorized MuleHide representative shall inspect all completed work.

The information given on this PDS is subject to change without notice. Always check the MuleHide website at [www.mulehide.com](http://www.mulehide.com) for the latest information, changes and updates or contact MuleHide at 800-786-1492.

#### DISCLAIMER

The statements provided concerning the material shown are intended as a guide for material usage and are believed to be true and accurate at the time of printing. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. ("MuleHide"). Since the manner of use is beyond our control, MuleHide does not authorize anyone to make any warranty of merchantability or fitness for any particular purpose or any other warranty, guarantee or representation, expressed or implied, concerning this material. This product may be eligible for a MuleHide warranty, please check the MuleHide website at [www.mulehide.com](http://www.mulehide.com) or contact MuleHide directly at 800-786-1492 for details. Buyer and user accept the product under these conditions and assume the risk of any failure, any injury to person or property (including that of the user), loss or liability resulting from the handling, storage or use of the product whether or not it is handled, stored or used in accordance with the directions or specifications. MuleHide must be notified in writing of any claims and be given the opportunity to inspect the alleged failure before repairs are made.