


NOTES:

- Existing membrane must be primed with MH 121 primer. If existing mod bit is granular surfaced, MH 421 mod bit adhesive must be used to complete the seam. If existing mod bit is smooth surfaced, adhering directly to the primed surface is acceptable.
- For 20 year systems, 2 plies of SA base sheet must be installed prior to installing cap sheets.

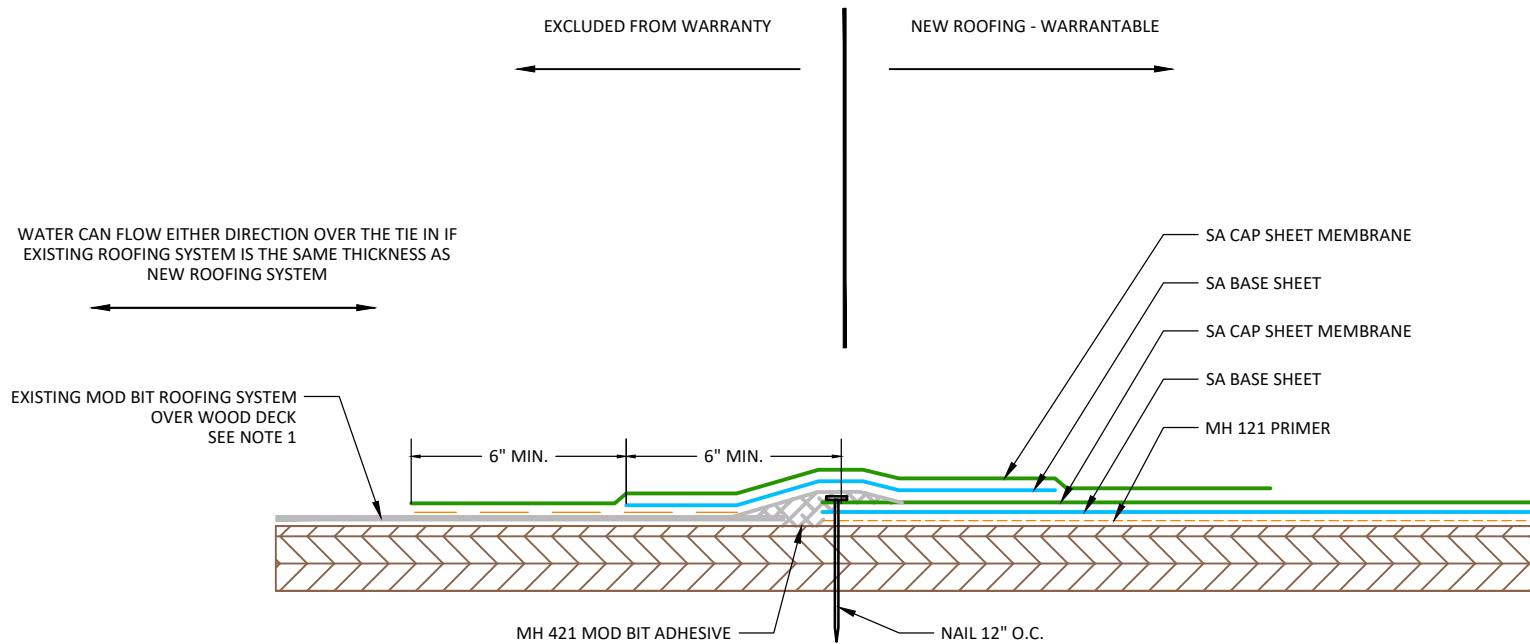

APPLICABLE SYSTEMS (AND MEMBRANES):  
SELF-ADHERING MOD BIT SYSTEMS

**MULEHIDE**

TIE-IN TO EXISTING SMOOTH MOD BIT WITH TEAR OFF

MAXIMUM WARRANTY:  
20 YEARS MAX

**DETAIL NO.:**

**MB-TE-A308**

REVISION DATE: 6/8/2026