



UNIVERSAL CORNER

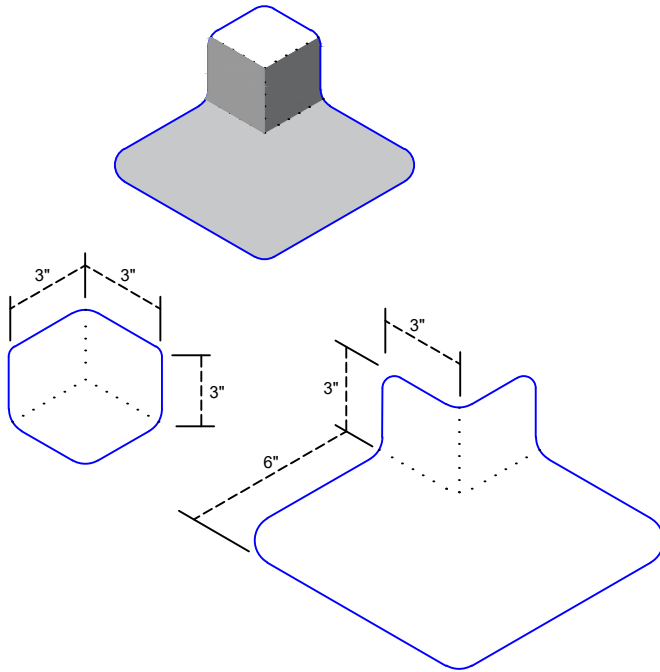


1 REMAINING BASE FLANGE FOR USE AS T-JOINT PATCHES WHERE NEEDED.

2 REFER TO T-JOINT PATCH DETAILS FOR REQUIREMENTS AT SEAM INTERSECTIONS.


OPTION A OUTSIDE CORNER

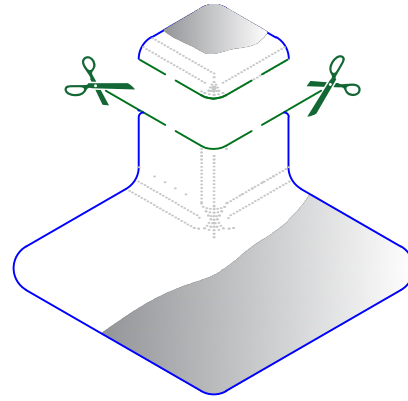


CURB OR WALL FLASHING W/ TPO
REINFORCED MEMBRANE

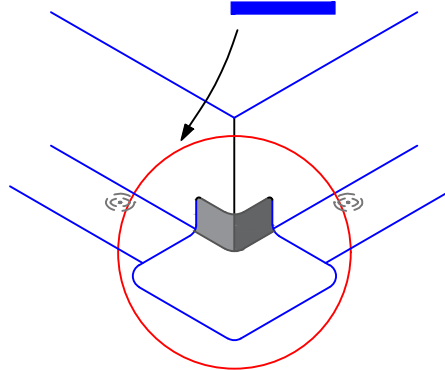

OPTION B INSIDE CORNER

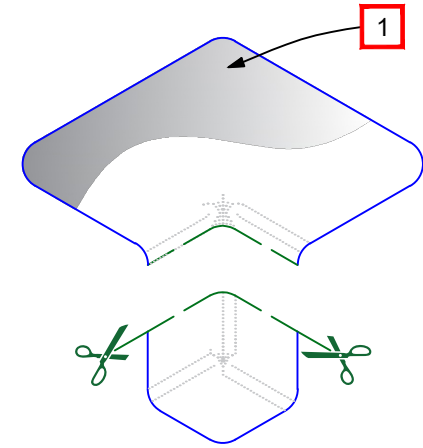

CURB OR WALL FLASHING W/ TPO
REINFORCED MEMBRANE

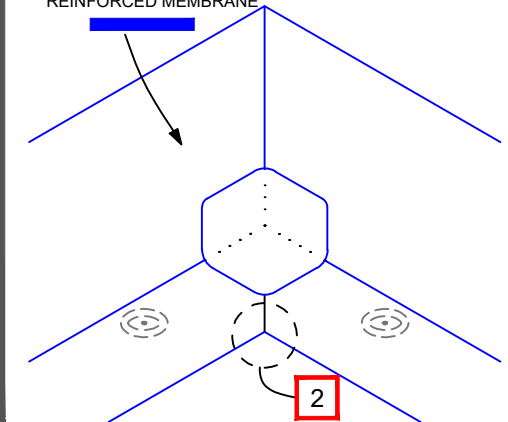

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)

TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)

TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)

TPO SELF-ADHERING (ADHERED)

TPO UNIVERSAL CORNER FLASHING

DETAIL NO.:

TP-CR-C700

REVISION DATE: 8/24/2026

MULEHIDE

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**