

115 Cleaner

Concentrated General Purpose Cleaner



The Right Choice for Low-Slope Roofing Products

800-786-1492 • mulehide.com

Rugged • Time-Tested • Weather-Tested

115 Cleaner is a general-purpose cleaner that prepares roof surfaces for the application of Mule-Hide Products roof coating systems. Power washing with 115 Cleaner easily and effectively removes existing oil, dirt, grease and other contaminants, helping ensure that the new coating will form a strong bond with the substrate. It requires little or no agitation and leaves the surface free of residue.

Features & Benefits

- Compatible with Mule-Hide Products silicone and acrylic coating systems.
- Compatible with a wide variety of roof substrates.
- Easily and effectively removes dirt, grease, oil and other grime from the roof surface to ensure proper adhesion of the new primer and finish coats.
- Requires little or no agitation.
- Can be applied with a garden-type airless sprayer.
- Environmentally friendly. It is phosphate-free and contains biodegradable surfactants.
- Safe for crew members and surfaces. It is non-flammable, non-corrosive and non-butyl.

Frequently Asked Questions

Does 115 Cleaner need to be diluted?

Yes. 115 Cleaner is provided as a concentrate and should be diluted. Undiluted cleaner would be difficult to remove from the roof surface. It should be diluted at the following rates:

- Heavy-Duty Cleaning: 2 fl. oz./gallon.
- Very Heavy-Duty Cleaning: 4 fl. oz./gallon.

What types of coating systems is 115 Cleaner compatible with?

115 Cleaner can be used prior to the application of Mule-Hide Products silicone and acrylic coating systems.



Packaging:

- 1-Gallon Pail
- 5-Gallon Pail
- 55-Gallon Drum

Application Method:



Using airless sprayer.

115 Cleaner

Concentrated General Purpose Cleaner



What types of substrates is 115 Cleaner compatible with?

115 Cleaner can be used to clean a wide variety of roof substrates, including TPO, EPDM and PVC membranes; aged silicone coatings; aged acrylic coatings; aged SEBS coatings; concrete; asphalt built-up roofs; granulated modified bitumen roofs; and metal roofs.

How is 115 Cleaner applied?

The general application steps include the following. For full instructions, see the complete Mule-Hide Products specifications or contact the Mule-Hide Products Technical Department.

- 115 Cleaner can be applied using a garden-type airless sprayer.
- Apply 115 Cleaner at an approximate rate of 200-250 sq. ft. per gallon. It should be applied to the roof surface in sufficient quantity to wet the surface for a minimum of 15 minutes without drying.
- Rinse the surface with clean water, using pressure-washing equipment capable of achieving 2000 P.S.I., until the rinse water is clean.
- Care should be taken to ensure that all runoff of oxidation and wash water is removed from exterior building walls after cleaning is complete.
- Allow roofing surfaces to dry thoroughly prior to applying any coating materials.
- EPDM substrates are properly cleaned when no black residue is present when swiping a finger or white cloth over the cleaned membrane.


Should hot or cold water be used to dilute 115 Cleaner?

115 Cleaner works well when diluted with either hot or cold water

Does 115 Cleaner “suds up” when applied to the roof surface?


115 Cleaner is a “controlled” suds formula. It does generate suds, but not to the extent of a cleaner like dishwashing detergent.

Item Number	Description	Gross Weight (lbs)	Units Per Pallet
16MHA1151	1G Pail	9	96
16MHA1155	5G Pail	49	36
16MHA11555	55G Drum	539	4

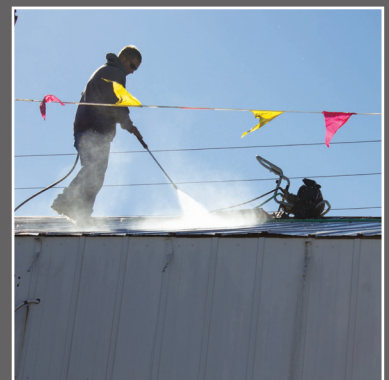

Power washing metal roof.

Used as a component in these systems:



The information herein should not be considered all-inclusive and should always be accompanied by a review of the Mule-Hide specifications and guidelines and good application practices.

This information herein is based upon data and knowledge considered to be true and accurate at the time of printing and is provided for the reader's consideration, investigation and verification. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. Mule-Hide Products Co., Inc. does not warrant any results to be obtained. Statements concerning possible use of Mule-Hide products are made without knowledge of your particular roof and such an application may not be fit for your particular purpose. MULE-HIDE DISCLAIMS ALL WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, except written warranties attached to Mule-Hide products and written warranties signed by an officer of Mule-Hide.

Visit the Mule-Hide website at www.mulehide.com prior to any installation for updated technical specifications and details. Mule-Hide is a U.S. registered trademark. All rights reserved. REV 2 8/23