



*"The name trusted in roofing since 1906"*

# **MODULAR**

## **ROOFING SYSTEMS**

# TABLE OF CONTENTS



<b><i>Our Promise</i></b> .....	3
<b><i>Membranes</i></b> .....	4
<b><i>Self-Bridging Mate-Line</i></b> .....	5
<b><i>EPDM/TPO/PVC Accessories</i></b> .....	6-9
<b><i>Multi-System Accessories</i></b> .....	10
<b><i>Coatings</i></b> .....	11
<b><i>Edge Metal</i></b> .....	12-13
<b><i>Notes</i></b> .....	14-15

## MULEHIDE PROFESSIONAL ROOFING SYSTEMS ARE DESIGNED SPECIFICALLY FOR MODULAR STRUCTURES & ARE SOLD NATIONWIDE.

- Special cutting equipment and special roll sizes at our distributors offer you just-in-time single-ply membranes, ready to install
- EPDM, TPO and PVC
- Acrylic water-base bonding adhesives are a must for indoor plant production. Its single-side wet lay-in or two-sided contact adhesion are ideal for fast installation, keeping factory lines moving
- Non-penetrating Self-Bridging Mate-Line™ is ideal for joining modular units
- Edge metal and accessories for single-ply roofing systems
- Acrylic and silicone coatings

## TRAINING & SUPPORT

- Hands-on in-plant factory installation training
- Field setup & dismantling training
- Roofing contractor referrals available
- UL & FM listed assemblies available

## WARRANTY PROGRAM

MuleHide offers a variety of warranties for commercial and residential projects including material and system warranties. System warranties are available for commercial projects when installed in strict compliance with MuleHide's specifications by a MuleHide warranty eligible contractor. Residential projects may qualify for material warranties. Complete warranty information and requirements for the various warranties available may be found at [www.mulehide.com](http://www.mulehide.com) or by contacting MuleHide at 800-786-1492.



## THE EPDM SYSTEMS YOU NEED FROM THE PEOPLE YOU TRUST

Traditionally, single-ply roofing is one size does it all. Yet more and more modular manufacturers and dealers are reaping the benefits of MuleHide professional roofing systems' custom sizes to fit modular structures.

### BLACK EPDM 45-MIL OR 60-MIL (NON-REINFORCED)

- Custom cuts or master rolls with modular industry sheet sizes
- Use with FR Adhesive or Acrylic Water Base Bonding Adhesive - fast installation keeps factory lines moving
- Fully adhered application is required

### WHITE-ON-BLACK EPDM 45-MIL OR 60-MIL (NON-REINFORCED)

- Reflects sunlight and cools the building interior - leading to lower BTU usage and energy costs
- Custom cuts or master rolls with modular industry sheet sizes
- Use with FR Adhesive or Acrylic Water Base Bonding Adhesive - fast installation keeps factory lines moving
- Fully adhered application is required
- CRRC rated

## TPO - THE AFFORDABLE WHITE ROOF

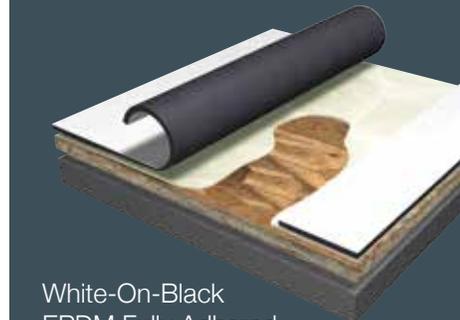
- The weathering capability of EPDM with the superior seam strength of heat weldable membranes
- More product on the top of the scrim where you need it most, one of the **thickest top** plies in the industry
- Reinforced membranes offer watertight integrity you can count on
- MuleHide TPO is CRRC rated
- Heat-welded seams or use our No-Weld 6" In-Seam Tape solution

## PVC - THE PREMIUM WHITE ROOF

- Saves labor costs verses traditional modular factory seaming
- MuleHide PVC is CRRC rated



Black EPDM Fully Adhered with FR Adhesive



White-On-Black EPDM Fully Adhered with Acrylic Water Base Bonding Adhesive



TPO Fully Adhered with WBBA 2000 Contact Bonding Adhesive



PVC Fully Adhered with WBBA 2000 Contact Bonding Adhesive

## EASY TO INSTALL

Setup crews quickly learn how to install and dealers love its economical speed of installation and dismantling.

## FLEXIBILITY

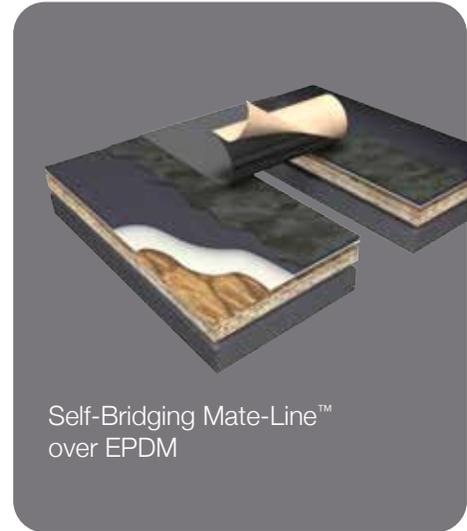
Self-Bridging Mate-Line stays flexible in hot and cold temperatures and will not crack from building movement.

## STRENGTH & PERFORMANCE

This pressure-sensitive adhesive tape with built-in bridging material provides rigidity within the mate-line to eliminate additional support materials.

## LONG LIFECYCLE

Stands up to UV rays and the punishment of rain, hail and wind.



Self-Bridging Mate-Line™  
over EPDM



### SELF-BRIDGING MATE-LINE

Specifically developed to seal the EPDM membrane roof system at the junctions of multiple modular units. MuleHide Self-Bridging Mate-Line™ is used in conjunction with the MuleHide Tape Primer to span the gap between modular units.

EPDM

*Requires the use of Tape Primer or Low-VOC Tape Primer.*

Product Code	Description	Carton	Weight	Shelf Life
08MHMSB096	9" x 65' roll	1 per	30 lbs.	1 year
08MHMSB121	12" x 100' roll		50 lbs.	
08MHMSB126	12" x 65' roll		35 lbs.	
08MHMSW121	12" x 100' roll, White		57 lbs.	
08MHMSW126	12" x 65' roll, White		43 lbs.	



### MATE-LINE TAPE

Specifically developed for use with EPDM single-ply membrane roofing systems. May be used in conjunction with the MuleHide Tape Primer to strip gravel stops, drip aprons, seams or batten bars, and can be used to make repairs.

EPDM

TPO

NO WELD PRODUCT

*Requires the use of Tape Primer or Low-VOC Tape Primer.*

Product Code	Description	Carton	Weight	Shelf Life
08MHMLB091	9" x 100' roll, Black	1 per	34 lbs.	1 year
08MHMLB096	9" x 65' roll, Black		23 lbs.	
08MHMLB121	12" x 100' roll, Black		47 lbs.	
08MHMLB126	12" x 65' roll, Black		30 lbs.	
08MHMLB186	18" x 65' roll, Black		45 lbs.	
08MHMLW061	6" x 100' roll, White	2 per	52 lbs.	1 year
08MHMLW121	12" x 100' roll, White	1 per	54 lbs.	
08MHMLW126	12" x 65' roll, White		35 lbs.	
08MHMLW186	18" x 65' roll, White		54 lbs.	
08MHMLW091	9" x 100' roll, White		34 lbs.	
08MHMLW096	9" x 65' roll, White		23 lbs.	



### BUTYL SEAL TAPE

To seal EPDM membranes in certain details. It adheres to plastics, concrete and metals. This product may be used to repair gutters, chimney flashings, and metal roofs on mobile homes and transport vehicles.

EPDM

TPO

PVC

Product Code	Description	Carton	Weight	Shelf Life
08MHBST	1/8" x 3/4" x 50' roll	10 per	33 lbs.	1 year

# EPDM/TPO/PVC ACCESSORIES



## ACRYLIC WATER BASE BONDING ADHESIVE

Used for single-side, wet, horizontal application of EPDM to acceptable HD wood fiberboard, plywood, OSB, DensDeck® Prime Roof Board or SECUROCK® Roof Board. Low temperature restrictions apply.

EPDM

Product Code	Description	Carton	Coverage	Shelf Life
08MHWBBA1	1-Gallon Pail	4 per	100-120 sq.ft. per gallon	1 year
08MHWBBA5	5-Gallon Pail	1 per		



## HYDROBOND® WATER-BASED PVC BONDING ADHESIVE

Designed to bond PVC membranes to a clean, dry horizontal surface as a one-sided wet lay-in adhesive with slopes up to 2:12. HydroBond® can be used with both smooth back and fleece backed PVC membranes. Can also be used as a contact adhesive for vertical applications, such as flashings.

\*Not approved for Standard PVC KEE HP

PVC

Product Code	Description	Coverage	Shelf Life
08MHBWBA5	5-Gallon Pail	100-133 sq.ft. per gallon	1 year



## BONDING ADHESIVE

A high-strength solvent-based contact adhesive that allows quick bonding of EPDM membrane and cured flashings to various porous and non-porous substrates. May be used on both horizontal and vertical surfaces. Formulated for application with a 1/2" (13 mm) medium nap roller.

EPDM

Product Code	Description	Coverage	Shelf Life
08MHBOND5	5-Gallon Pail	60 sq.ft. per gallon	1 year



## TPO BONDING ADHESIVE

A high-strength solvent-based contact adhesive that allows bonding of MuleHide TPO membrane to various porous and non-porous substrates.

TPO

Product Code	Description	Coverage	Shelf Life
08MHTBAAM5	5-Gallon Pail	60 sq.ft. per gallon	1 year



## LOW-VOC BONDING ADHESIVE

A high-strength solvent-based contact adhesive that allows bonding of EPDM and TPO to various porous and non-porous substrates. Specially formulated using a blend of VOC exempt and non-exempt solvents to meet the < 250 g/L VOC content requirements of the OTC Model Rule for adhesives and sealants.

### 1168 LOW-VOC BONDING ADHESIVE

This version meets requirements of California Rule 1168.

EPDM

TPO

Product Code	Description	Coverage	Shelf Life
08MHETBLV1	1-Gallon Pail (6/ctn)	60 sq.ft. per gallon	1 year
08MHETBLV5	5-Gallon Pail		
08MH11685	1168 California 5-Gallon Pail		



## FR ADHESIVE

A fire-resistant, water-based, fume-free EPDM bonding adhesive used with standard OSB or plywood inventory. It eliminates the need for commercial modular manufacturers to stock specialized roof decks to meet UL Class C roof deck requirements.

EPDM

Product Code	Description	Carton	Weight	Shelf Life
08MHFRBA5	5-Gallon	1 per	50 lbs.	9 months
08MHFRBA55	55-Gallon		550 lbs.	
08MHFRBA25	250-Gallon		2,500 lbs.	



## LOW-VOC WEATHERED MEMBRANE CLEANER

Used to clean both new and in-service EPDM, TPO, PVC and PVC KEE membranes prior to the seaming process. This cleaner helps to loosen and remove dirt and other contaminants from the membrane surface and leaves a suitable surface for welding or the subsequent application of Tape Primer.

EPDM

TPO

PVC

\*Meets California & Utah VOC regulations

Product Code	Description	Carton	Coverage
08MHTLVMC1	1-Gallon Pail / Low-VOC*	2 per	400 sq.ft. (1-side) per gallon
08MHTLVMC5	5-Gallon Pail / Low-VOC*	1 per	



## AEROWEB LOW-VOC AEROSOL CONTACT ADHESIVE

AeroWeb Low-VOC Contact Adhesive/Primer with its web-like spray pattern is a versatile option in a number of applications such as standard TPO & EPDM on vertical & horizontal surfaces and enhancing the bond between F5 Air & Vapor Barrier and various substrates.

EPDM TPO

Product Code	Description	Carton	Weight	Coverage
08MHAWAP40	AeroWeb	1 per	30 lbs.	1000 sq.ft. per cylinder
08MHCCGUT8	Cav-Grip Un-tack	1 per	8 lbs.	--



## TAPE PRIMER

A solvent-based product designed for one-step cleaning and priming of EPDM surfaces to be bonded with in-seam tapes, Uncured Flashing Tapes, Cured Cover Tapes and pre-taped membranes.

EPDM

Product Code	Description	Carton	Coverage	Shelf Life
08MHTAPR1	1-Gallon Pail	6 per	250 sq.ft. per gallon	9 months



## EPDM BLACK LAP SEALANT

Required for sealing EPDM seams and flashings against the effects of weathering when seamed with Splice Adhesive or All Purpose Single Seal Adhesive. Refer to the MuleHide EPDM Manual for appropriate use of Lap Sealant when seams and flashings are completed with MuleHide tape products.

EPDM

Product Code	Description	Weight	Coverage	Shelf Life
08MHLPCB	11-oz Tube (25 per carton)	23 lbs.	22 Ln.ft. with 5/16" bead	1 year



## LOW-VOC PRIMER

A low-VOC product designed for one-step cleaning and priming of EPDM and TPO surfaces prior to the application of in-seam tapes and other taped products.

EPDM TPO

Product Code	Description	Carton	Coverage	Shelf Life
08MHEPLV1	1-Gallon Pail	6 per	250 sq.ft. per gallon	9 months



## WATER CUT-OFF MASTIC

Used to seal roofing membranes to stop water penetration into the roofing system. Common uses are at drain terminations and behind MuleHide All Purpose Bars at wall terminations.

EPDM TPO PVC

Product Code	Description	Weight	Coverage	Shelf Life
08MHWTRC	11-oz Tube (25 per carton)	28 lbs.	10 Ln.ft. with 1/2" bead	1 year



## TPO CUT-EDGE SEALANT

A thermoplastic compound designed for use at the edge of cut MuleHide TPO membrane seams after the membrane has been welded to itself or to MuleHide TPO Coated Metal.

## LOW-VOC CUT-EDGE SEALANT

\*Meets California & Utah VOC regulations

TPO

Product Code	Description	Carton	Coverage	Shelf Life
08MHTCESCE	16-oz Bottle	8 per	250 -275 lf 1/8" bead	1 year
08MHTCELVE	16-oz Bottle	8 per	250 -275 lf 1/8" bead	1 year



## UNIVERSAL SINGLE-PLY SEALANT

A 100% solids, solvent-free, one-part, polyether sealant that provides a weather-tight seal to a variety of building substrates. Provides excellent adhesion to substrates such as stone, masonry, ceramic, marble, wood, steel, aluminum, most plastics and composites. Not recommended as a glass-glazing sealant.

EPDM TPO PVC

Product Code	Description	Weight	Coverage	Shelf Life
08MHUSPSWH	10.1-oz Tube (24 per carton)	24 lbs.	25 Ln.ft. with 1/4" bead	1 year



## PVC CUT EDGE SEALANT

A free-flowing polymeric material designed for use at the cut edge (exposed scrim) of MuleHide PVC reinforced membrane seams after the membrane has been welded to itself or to MuleHide PVC coated metal.

PVC

Product Code	Description	Carton	Coverage	Shelf Life
08MHPESPT	16-oz Bottle	12 per	225-275 lf 1/8" bead	1 year

# EPDM/TPO/PVC ACCESSORIES



EPDM

## PRE-CUT INSIDE/OUTSIDE CORNERS

Ideal for installing inside and outside corners. Consists of .060 inch (1.5-mm) thick uncured EPDM flashing material laminated to cured butyl rubber tape and rolled onto a poly release liner providing .090-mils (2.25-mm) of total thickness.

*Requires the use of Tape Primer or Low-VOC Primer.*

Product Code	Description	Carton	Weight	Shelf Life
08MHPC20	7" x 9"	20 per	5 lbs.	9 months
08MHCP20	7" x 9"		8 lbs.	



EPDM

## T-JOINT PATCHES

Used to seal field splice joints or a horizontal-to-vertical field seam transition. 40-mil (1-mm) thick uncured EPDM flashing material laminated to cured butyl rubber tape and rolled onto a poly release liner for a total thickness of 70-mils (1.75-mm).

*Requires the use of Tape Primer or Low-VOC Primer.*

Product Code	Description	Carton	Weight	Shelf Life
08MHETJ6B	6" x 6"	20 per	3 lbs.	9 months
08MHETJ12B	12" x 12"		10 lbs.	



EPDM

## EPDM IN-SEAM TAPE

A black or white, butyl rubber-based adhesive in tape form. Formulated to provide high green-strength in both shear and peel. May be used on ballasted, mechanically attached and fully adhered EPDM roofing systems.

*Requires the use of Tape Primer or Low-VOC Primer.*

Product Code	Description	Carton	Shelf Life
08MHINSMT3	Black 3" x 100'	4 per	1 year
08MHINSMT2	Black 3" x 25'	12 per	
08MHINSMT6	Black 6" x 100'	2 per	
08MHINST3W	White 3" x 100'	4 per	
08MHINST6W	White 6" x 100'	2 per	



EPDM

## PRE-MOLDED EPDM PIPE BOOTS

Accommodates single pipe sizes from 1" to 6" in diameter. Conical-shaped steps securely seal all single pipe penetrations. The large, double-thick, molded rib at the top of each step offers superior tear resistance and reinforcement, as well as a cutting guide.

*Requires the use of Tape Primer or Low-VOC Primer.*

Product Code	Description	Carton	Size	Weight	Shelf Life
08MHPBTB6T	Black with clamps and tape rings	10 per	1" - 6"	8 lbs.	1 year
08MHPBTW6T	White with clamps and tape rings			10 lbs.	



TPO

PVC

## T-JOINT COVER

Used to seal step-offs at splice intersections. Installation is mandatory on all 60-mil and 80-mil TPO/PVC systems and on 45-mil systems where step-offs have not been properly sealed.

Product Code	Description	Size	Carton	Weight
08MHTTJPWH	White TPO	4.5" circle	100 per	3 lbs.
08MHTTJPGY	Gray TPO			
08MHTTJPTN	Tan TPO			
08MHPTJPWH	White TPO			4 lbs.
08MHPTJPGY	Gray TPO			
08MHPTJPTN	Tan TPO			



TPO

PVC

## UNIVERSAL CORNERS

Uniform in shape and size and provide watertightness at corners formed by TPO/PVC coated metal and/or TPO/PVC flashing membrane. Provides a neat, finished look to building corners, curbs and parapet flashings with no cutting or stretching required.

Product Code	Description	Carton	Weight
08MHTUCWHE	White TPO	20 per	5 lbs.
08MHTUCGYE	Gray TPO		
08MHTUCTNE	Tan TPO		
08MHPVCIO	White PVC		



TPO

PVC

## PIPE SEALS

An injection molded, pre-formed flashing for single pipe penetrations made on MuleHide TPO/PVC membrane roof systems. Designed to add ease to the installation process while offering increased watertight security and improved aesthetics.

Product Code	Description	Size	Carton	Weight
08MHTP348W	White TPO	3/4" to 8" OD	8 per	8 lbs.
08MHTP348G	Gray TPO			
08MHTP348T	Tan TPO			
08MHPP348W	White PVC			
08MHPP348G	Gray PVC			
08MHPP348T	Tan PVC			



## MODULAR PIPE BOOTS

Furnish and install the Modular Pipe Boot at all points where any projection penetrates the roof system, and is less than 3" in diameter.

EPDM

Product Code	Description	Carton	Weight
08MHPBTPS3	Black Pipe Boot	10 per	5 lbs.
08MHPBTW3T	White Pipe Boot		



TPO

## TPO 60-MIL NON-REINFORCED FLASHING

Primarily used to seal details where field fabrication is necessary, such as drain details, pipe flashings, pitch pocket flashings, seaming joints of the MuleHide TPO coated metal and any place where reinforced membrane is not practical.

Product Code	Description	Size	Carton	Weight
08MHDM125W	White	12" x 50'	1 per	17 lbs.
08MHDM125G	Gray			
08MHDM125T	Tan			
08MHDM243W	White	24" x 50'	1 per	33 lbs.
08MHDM243G	Gray			
08MHDM243T	Tan			
08MHDM24MB	Mansard Brown			
08MHDM24PG	Patina Green			
08MHDM24RB	Rock Brown			
08MHDM24SG	Slate Gray			
08MHDM24TC	Terra Cotta			



PVC

## PVC NON-REINFORCED FLASHING

Used for sealing joints of MuleHide PVC coated metal, drain details, field flashing pipes and other details where reinforced membrane or the use of pre-molded accessories are not feasible.

Product Code	Description	Size	Carton	Weight
08MHPF1250	White/Gray	12" x 50'	1 per	31 lbs.
08MHPF2450	White/Gray	24" x 50'		56 lbs.
08MHPF125T	White/Tan	12" x 50'		33 lbs.
08MHPF245T	White/Tan	24" x 50'		66 lbs.



TPO

## TPO COVER STRIP

Intended to strip in flat metal flanges (i.e. drip edge or self-flashing curb flanges) or rows of fasteners and plates. TPO Cover Strip cannot be used for flashing corners, pipes, T-joints or butt joints on TPO Fleece Back Membrane or any angled metal flanges such as gravel stops or other canted metal edgings.

*Requires the use of TPO Tape Primer or Low-VOC Primer.*

Product Code	Description	Size	Carton	Weight	Shelf Life
08MHTSC61W	White	6" x 100'	2 per	48 lbs.	1 year
08MHTSC61G	Gray				
08MHTSC61T	Tan				



TPO

## TPO WALKWAY ROLL

TPO Walkway Roll incorporates an aggressive, non-slip, diamond plate tread pattern of polyester reinforced TPO material that offers excellent tear and puncture resistance. Walkway Rolls are trimmed in safety yellow along the length of the sheet to better define the walkway area. The yellow edges are smooth without safety lugs to allow for easier welding.

Product Code	Description	Roll	Coverage	Weight
08MHTW345W	White	34" x 50'	125 sq.ft.	97 lbs.
08MHTW345G	Gray			
08MHTW345T	Tan			



PVC

## PVC WALKWAY ROLL

PVC Walkway Roll incorporates an aggressive, non-slip, diamond plate tread pattern of polyester reinforced PVC material that offers excellent tear and puncture resistance. Walkway Rolls are trimmed in safety yellow along the length of the sheet to better define the walkway area. The yellow edges are smooth without safety lugs to allow for easier welding.

Product Code	Description	Size	Coverage	Weight
08MHMH100	Gray	36" x 60'	180 sq.ft.	97 lbs.



EPDM

TPO

PVC

## F5 AIR & VAPOR BARRIER

A 40-Mil composite consisting of 35-Mils of self-adhering rubberized asphalt laminated to a 5-Mil woven polypropylene film. A siliconized one-piece release liner prevents the material from bonding to itself in the roll and is easily removed for installation.

Product Code	Description	Weight	Coverage	Shelf Life
09MHF5AVB1	39" x 100'	63 lbs.	325 sq.ft.	--

# MULTI-SYSTEM ACCESSORIES



## REPAIR HERO

A solvent-based, fiber-reinforced terpolymer sealant intended for the repair of asphalt, modified bitumen, metal, Kynar®, concrete, TPO, PVC, Elvaloy®/PVC, Hypalon® (CSPE), PIB and EPDM roofs.



Product Code	Description	Carton	Weight
16MHRHWH1	1-Gallon Pail - White	4 per	33.8 lbs.
16MHRHWH3	3-Gallon Pail - White	1 per	25 lbs.
16MHRHBK1	1-Gallon Pail - Black	4 per	33.8 lbs.
16MHRHBK3	3-Gallon Pail - Black	1 per	25 lbs.
16MHRHGY3	3-Gallon Pail - Gray	1 per	25 lbs.



## LARGE PITCH PAN KIT

Create (4) 7" Pitch Pans per kit. *Kit includes:* 16 corners, 16 straights, 3 tubes JTS 1 and 1 - 2 liter pouch of MP Liquid Sealant.



## SMALL PITCH PAN KIT

Create (4) 4" Pitch Pans per kit. *Kit includes:* 16 corners, 2 tubes JTS 1 and 3 - 2 liter pouches of MP Liquid Sealant.

Customize kits by adding additional components.



Product Code	Description	Carton	Weight
08MHSPKLWH	Large Pitch Pan Kit	1	6 lbs.
08MHSPKSWH	Small Pitch Pan Kit	1	2 lbs.



## SHAPESHIFT PITCH PAN

Consist of straight and outside corner sections snap together to create an endless number of pitch pan sizes to seal around roof projections. The pieces snap together with interlocking joints.



Product Code	Description	Carton	Weight
08MHSSPC48	Corners	48 per	6 lbs.
08MHSSPC16	Corners	16 per	2 lbs.
08MHSSPS16	Straights	16 per	2 lbs.



## JTS 1 JOINT & TERMINATION SEALANT

JTS 1 is a moisture-cure urethane sealant made with 100% solids. JTS 1 seals large joints, roof termination bars and adheres to concrete, masonry, EPDM, PVC, TPO (primed), wood, vinyl and most other common building materials.



Product Code	Color	Coverage	Carton	Shelf Life
30MHJTS1WH	White	25 LF/Tube	(12) 10 oz tubes/ctn	2 years
30MHJTS1BK	Black			
30MHJTS1MB	Medium Bronze			
30MHJTS1BZ	Bronze			
30MHJTS1GY	Gray			
30MHJTS1LS	Limestone			
30MHJTS1WT	Wicker Tan			
30MHJTS1TC	Terra Cotta			



## MP LIQUID SEALANT

Single-component, non-shrink, advanced-technology sealant designed for sealing metal roof seams and fasteners, gutter seams and liquid flashings. Semi-self leveling sealant consisting of 100% solids which results in zero shrinkage.



Product Code	Description	Carton	Shelf Life
08MHMPLS2W	2 Liter Pouch, White	(4) 2 Liter Pouch	1 Year
08MHMPLS2B	2 Liter Pouch, Black		

## SILICONE

Silicone roof coating is a high-solids, single-part elastomeric roof coating and manufactured from durable inorganic silicone resins, reinforcing and reflective pigments. Apply over new spray-applied polyurethane foam, EPDM, TPO, aged PVC, aged acrylic coatings, concrete, asphalt built-up roofs, granulated modified bitumen roofs and metal roofs.

- Provides years of durable, low-maintenance seamless protection—control UV damage, reduce thermal shock, fully adhered system seals off water entry points
- Superior resistance to ponding water—low water absorption outperforms conventional solvent- and water-based protective roof coatings
- Same day recoating possible with quick cure time
- Low odor—solvent-free formula; VOC compliant throughout North America
- White 100% Silicone Roof Coating improves rooftop air conditioning unit efficiency

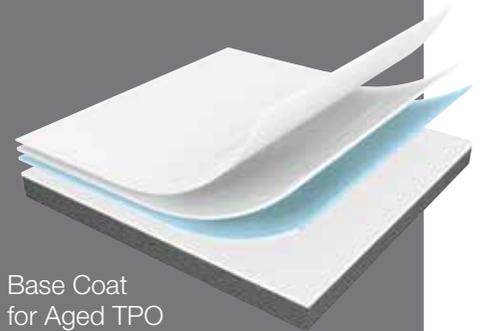
## ACRYLIC

Acrylic roof coating is an elastomeric water-based roof coating system or maintenance coating over metal and on smooth asphalt built-up roofs, mod bit, EPDM, TPO and PVC.

- Exceptional exterior durability and UV stability
- Specifications for both reinforced and non-reinforced assemblies
- Superior flexibility in low temperature environments

### BEST PRACTICE TIP


Use 100% Silicone Roof Coating in gray as the first coat, or base coat, and use white as the second coat.



Base Coat  
for Aged TPO  
Membrane



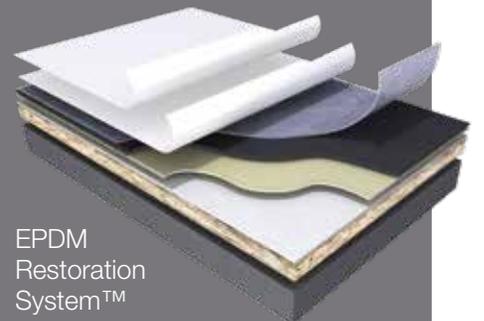Metal Roof  
Coatings  
System



EPDM  
Restoration  
System™



FASCIA PRODUCT LINE	VERSIONS
 <b>ECLIPSE</b>	<ul style="list-style-type: none"> <li>• Single-Ply</li> </ul>
 <b>ECLIPSE MB</b>	<ul style="list-style-type: none"> <li>• Single-Ply</li> <li>• Built-Up or Modified</li> </ul>
 <b>ECLIPSE EXTENDED MB</b>	<ul style="list-style-type: none"> <li>• Single-Ply</li> <li>• Built-Up or Modified</li> </ul>
 <b>2-PIECE SNAP-ON COMPRESSION</b>	<ul style="list-style-type: none"> <li>• Single-Ply, Snap-On</li> <li>• Single-Ply, Crimp-On</li> </ul>
 <b>2-PIECE SNAP-ON COMPRESSION MB</b>	<ul style="list-style-type: none"> <li>• Built-Up or Modified</li> </ul>
 <b>1-3/4" FASCIA COVER</b>	<ul style="list-style-type: none"> <li>• Formed</li> </ul>
 <b>4" FASCIA COVER</b>	<ul style="list-style-type: none"> <li>• 4"</li> </ul>
 <b>COUNTERFLASHING</b>	<ul style="list-style-type: none"> <li>• 1-Piece Reglet</li> <li>• 2-Piece Reglet</li> <li>• 1-Piece Surface Mounted</li> </ul>

FASCIA PRODUCT LINE	VERSIONS
 <b>EXTRUDED FASCIA</b>	<ul style="list-style-type: none"> <li>• Fully Adhered or Mechanically Attached</li> </ul>
 <b>EXTRUDED FASCIA MB</b>	<ul style="list-style-type: none"> <li>• Built-Up or Modified</li> </ul>
 <b>EXTENDED EXTRUDED FASCIA</b>	<ul style="list-style-type: none"> <li>• Fully Adhered or Mechanically Attached</li> </ul>
 <b>EXTENDED EXTRUDED FASCIA MB</b>	<ul style="list-style-type: none"> <li>• Built-Up or Modified</li> </ul>
 <b>HEAVY GAUGE EXTRUDED FASCIA</b>	<ul style="list-style-type: none"> <li>• Fully Adhered or Mechanically Attached</li> </ul>
 <b>HEAVY GAUGE EXTRUDED FASCIA MB</b>	<ul style="list-style-type: none"> <li>• Built-Up or Modified</li> </ul>
 <b>CANTED WATERDAM EXTRUDED FASCIA</b>	<ul style="list-style-type: none"> <li>• Galvanized</li> </ul>
 <b>CANTED EXTENDED WATERDAM EXTRUDED FASCIA</b>	<ul style="list-style-type: none"> <li>• Galvanized</li> </ul>
 <b>ONE EXTENDED FASCIA</b>	<ul style="list-style-type: none"> <li>• Fully Adhered or Mechanically Attached</li> </ul>

DRIP EDGE PRODUCT LINE	VERSIONS
 <b>DRIP EDGE</b>	<ul style="list-style-type: none"> <li>• Kynar</li> <li>• Flash-Thru</li> </ul>
 <b>DRIP EDGE</b>	<ul style="list-style-type: none"> <li>• TPO or PVC Coated</li> </ul>
 <b>SKIRTED DRIP EDGE</b>	<ul style="list-style-type: none"> <li>• TPO or PVC Coated (Skirted)</li> </ul>
 <b>GRAVEL STOP</b>	<ul style="list-style-type: none"> <li>• Kynar</li> </ul>
 <b>EXTRUDED DRIP EDGE</b>	<ul style="list-style-type: none"> <li>• Flat or Pitched Roof Flange</li> </ul>

WOOD NAILER PRODUCT LINE	VERSIONS
 <b>NAILER-T</b>	<ul style="list-style-type: none"> <li>• Wood Nailer Alternative</li> </ul>
 <b>NAILER BOX RI</b>	<ul style="list-style-type: none"> <li>• Wood Nailer Alternative</li> </ul>

# EDGE METAL ACCESSORIES & COLOR CHART





COPING PRODUCT LINE	VERSIONS
 <p><b>COPING</b></p>	<ul style="list-style-type: none"> <li>• Tapered</li> <li>• Flat</li> <li>• Existing Slope</li> </ul>
 <p><b>SNAP COPING</b></p>	<ul style="list-style-type: none"> <li>• Tapered</li> <li>• Flat</li> <li>• Existing Slope</li> </ul>
 <p><b>SNAP GOLD COPING</b></p>	<ul style="list-style-type: none"> <li>• Tapered</li> <li>• Flat</li> <li>• Existing Slope</li> </ul>
 <p><b>CANTILEVER COPING</b></p>	<ul style="list-style-type: none"> <li>• Single</li> <li>• Double</li> </ul>
 <p><b>CONTINUOUS CLEAT COPING</b></p>	<ul style="list-style-type: none"> <li>• Tapered</li> </ul>

WATER CONTROL PRODUCT LINE	VERSIONS
 <p><b>GUTTER</b></p>	<ul style="list-style-type: none"> <li>• Champfer</li> </ul>
 <p><b>DOWNSPOUTS</b></p>	<ul style="list-style-type: none"> <li>• Closed</li> <li>• Open Face</li> </ul>

## Color Options:

Colors shown are matched as accurately as possible, but may vary slightly from finished product.

### Express Colors: (Also available in Mill Finish)

 Almond	 Bone White	 Cityscape	 Clear Anodized	 Dark Bronze
 Medium Bronze	 Sandstone	 Sierra Tan	 Slate Gray	 Stone White

### Standard Colors:

 Aged Bronze	 Antique Bronze	 Black ▲	 Buckskin	 Cardinal (Regal) Red
 Charcoal (Charcoal Gray)	 Classic Bronze	 Colonial Red	 Evergreen	 Forest (Sherwood) Green
 Granite	 Hartford Green	 Hemlock Green	 Inkwell	 Interstate (Regal) Blue
 Iron Ore	 Mansard Brown	 Midnight (Extra Dark) Bronze	 Musket Gray	 Onyx (Matte Black) ▲
 Pacific Blue	 Patina Green ▲	 Regal White	 Sky (Military) Blue	 Terra Cotta

### Premium Colors:

 Award Blue	 Champagne (Metallic)	 (Classic) Copper Penny	 Sand Stone ■ ★	 Silver (Metallic)
 Silversmith	 Weathered Zinc	 Zinc	<ul style="list-style-type: none"> <li>★ = Also in Mill Finish</li> <li>■ = Post-Painted</li> <li>▲ = Must Specify Supplier</li> <li>★ = Available in Three Other Stone Colors</li> </ul>	



To view the full line of Edge Metal & Accessories including metal options and sizes, scan the QR code.

Our colors are deep, rich and true. Made of Valspar's Fluropon® High Performance Hylar 5000®/Kynar 500® finish, they offer the ultimate in resistance against fading and weathering. Custom colors also available.







*“The name trusted in roofing since 1906”*

---

**Customer Line: 800-786-1492 • [www.mulehide.com](http://www.mulehide.com)**

---



The information herein should not be considered all-inclusive and should always be accompanied by a review of the MuleHide specifications and guidelines and good application practices.

This information herein is based upon data and knowledge considered to be true and accurate at the time of printing and is provided for the reader's consideration, investigation and verification. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. ("MuleHide"). MuleHide does not warrant any results to be obtained. Statements concerning possible use of MuleHide products are made without knowledge of your particular roof and such an application may not be fit for your particular purpose. MuleHide **DISCLAIMS ALL WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE**, except written warranties attached to MuleHide and written warranties signed by an officer of MuleHide.

Visit the MuleHide website at [www.mulehide.com](http://www.mulehide.com) prior to any installation for updated technical specifications and details. MuleHide is a U.S. registered trademark. Kynar is wholly owned registered trademark of Arkema Inc. All rights reserved.