

POLY ISO CGF TAPERED STOCK PACKAGING INFO

ASTM C1289 Type II, Class 2, Grade 2 (20 psi) or Grade 3 (25 psi)

SLOPE	LABEL	THICKNESS			THERMAL RESISTANCE	BOARD FT PER PIECE	PIECES PER BDL	BOARD FT PER BDL	SQUARE FT PER BDL	WEIGHT (LB/SF)
		MINIMUM	MAXIMUM	AVERAGE	AVERAGE LTTR					
1/8"	AA	0.5"	1.0"	0.75"	4.3	12	64	768	1024	0.28
	A	1.0"	1.5"	1.25"	7.1	20	38	760	608	0.35
	B	1.5"	2.0"	1.75"	10.0	28	26	728	416	0.42
	C	2.0"	2.5"	2.25"	12.9	36	20	720	320	0.48
	D	2.5"	3.0"	2.75"	15.9	44	16	704	256	0.55
	E	3.0"	3.5"	3.25"	18.9	52	14	728	224	0.62
	F	3.5"	4.0"	3.75"	22.0	60	12	720	192	0.69
3/16"	J	1.0"	1.75"	1.375"	7.8	22	32	704	512	0.37
	K	1.75"	2.5"	2.125"	12.1	34	20	680	320	0.47
	L	2.5"	3.25"	2.875"	16.6	46	16	736	256	0.57
	M	3.25"	4.0"	3.625"	21.3	58	12	696	192	0.67
3/16"	JJ	0.5"	1.25"	0.875"	5.0	14	52	728	832	0.30
	KK	1.25"	2.0"	1.625"	9.3	26	28	728	448	0.40
	LL	2.0"	2.75"	2.375"	13.6	38	18	684	288	0.50
	MM	2.75"	3.5"	3.125"	18.2	50	14	700	224	0.60
1/4"	X	0.5"	1.5"	1.0"	5.7	16	48	768	768	0.32
	Y	1.5"	2.5"	2.0"	11.4	32	24	768	384	0.45
	Z	2.5"	3.5"	3.0"	17.4	48	16	768	256	0.59
	ZZ	3.5"	4.5"	4.0"	23.6	64	10	640	160	0.72
1/4"	G	1.0"	2.0"	1.5"	8.6	24	32	768	512	0.38
	H	2.0"	3.0"	2.5"	14.4	40	18	720	288	0.52
	I	3.0"	4.0"	3.5"	20.5	56	12	672	192	0.65
3/8"	RR	1.0"	2.5"	1.75"	10.0	28	26	728	416	0.42
	SS	0.5"	2.0"	1.25"	7.1	20	36	720	576	0.35
	TT	2.0"	3.5"	2.75"	15.7	44	16	704	256	0.55
1/2"	Q	0.5"	2.5"	1.5"	8.6	24	32	768	512	0.38
	QQ	2.5"	4.5"	3.5"	20.5	56	12	672	192	0.65
	XX	1.0"	3.0"	2.0"	11.4	32	22	704	352	0.45
1/16"	7	0.5"	0.75"	0.625"	3.6	10	76	760	1216	0.26
	8	0.75"	1.0"	0.875"	5.0	14	52	728	832	0.30
	1	1.0"	1.25"	1.125"	6.4	18	40	720	640	0.33
	2	1.25"	1.5"	1.375"	7.8	22	32	704	512	0.37
	3	1.5"	1.75"	1.625"	9.3	26	28	728	448	0.40
	4	1.75"	2.0"	1.875"	10.7	30	24	720	384	0.43
	5	2.0"	2.25"	2.125"	12.1	34	20	680	320	0.47
	6	2.25"	2.5"	2.375"	13.6	38	18	684	288	0.50

The competitive information is assembled using the latest information available in the marketplace.
Every effort has been made to ensure its accuracy.
If you should have any questions, please contact the appropriate manufacturer.




“The name trusted in roofing since 1906”

Customer Line: 800-786-1492
www.mulehide.com

©2025 MuleHide • Printed in USA • MH LIT# LT.RCISOCGF • Rev. 0 6/25

POLY ISO COATED GLASS FACER

PACKAGING INFORMATION
CROSS REFERENCE CHART

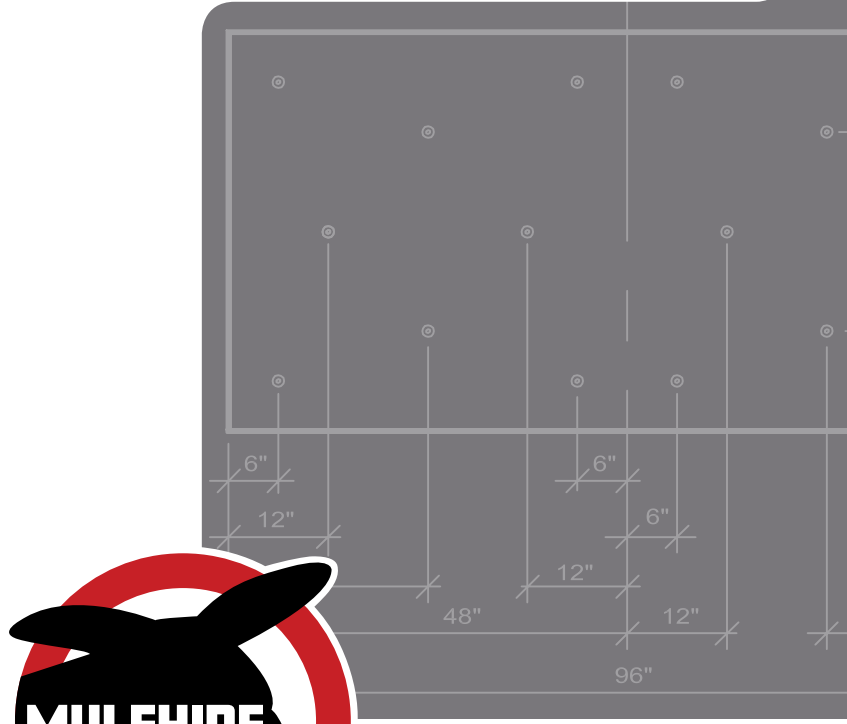

POLY ISO CGF FLAT STOCK PACKAGING INFO

ASTM C1289 Type II, Class 2, Grade 2 (20 psi) or Grade 3 (25 psi)

SIZE	THERMAL RESISTANCE	PIECES PER BDL	SQUARE FT. PER BDL		TRUCKLOAD QUANTITIES (SQUARES)	WEIGHT (LB/SF)
	LTTR VALUE		4x4	4x8		
1.0"	5.7	48	1,536	768	368.64	0.31
1.1"	6.3	43	1,376	688	330.24	0.33
1.2"	6.8	40	1,280	640	307.20	0.34
1.3"	7.4	36	1,152	576	276.48	0.36
1.4"	8.0	34	1,088	544	261.12	0.37
1.5"	8.6	32	1,024	512	245.76	0.38
1.6"	9.1	30	960	480	230.40	0.40
1.7"	9.7	28	896	448	215.04	0.41
1.8"	10.3	26	832	416	199.68	0.42
1.9"	10.8	25	800	400	192.00	0.44
2.0"	11.4	24	768	384	184.32	0.45
2.1"	12.0	22	704	352	168.96	0.46
2.2"	12.6	21	672	336	161.28	0.48
2.3"	13.2	20	640	320	153.60	0.49
2.4"	13.8	20	640	320	153.60	0.50
2.5"	14.4	19	608	304	145.92	0.52
2.6"	15.0	18	576	288	138.24	0.53
2.7"	15.6	17	544	272	130.56	0.55
2.8"	16.2	17	544	272	130.56	0.56
2.9"	16.8	16	512	256	122.88	0.57
3.0"	17.4	16	512	256	122.88	0.59
3.1"	18.0	15	480	240	115.20	0.60
3.2"	18.6	15	480	240	115.20	0.61
3.3"	19.2	14	448	224	107.52	0.63
3.4"	19.9	14	448	224	107.52	0.64
3.5"	20.5	13	416	208	99.84	0.66
3.6"	21.1	13	416	208	99.84	0.67
3.7"	21.7	12	384	192	92.16	0.68
3.8"	22.3	12	384	192	92.16	0.69
3.9"	23.0	12	384	192	92.16	0.71
4.0"	23.6	12	384	192	92.16	0.72
4.1"	24.2	11	352	176	84.48	0.73
4.2"	24.9	11	352	176	84.48	0.75
4.3"	25.5	11	352	176	84.48	0.76
4.4"	26.1	10	320	160	76.8	0.77
4.5"	26.8	10	320	160	76.8	0.79



Coated Glass Facer - Flat



Coated Glass Facer - Tapered



To minimize the effects of thermal bridging, MuleHide recommends the use of multiple layers when the total desired or specified R-value requires an insulation thickness greater than 2.7" thick.
LTTR values were determined in accordance with CAN/ULC-S770-09