

# 5-ft x 40-ft Self-Adhering EPDM

Easy Portability and Fast Installation



The Right Choice for Low-Slope Roofing Products

800-786-1492 • mulehide.com

Rugged • Time-Tested • Weather-Tested

## Product Description

- 5' x 40' black, or white-on-black, self-adhering EPDM membrane for easy portability and fast installation
- Approximately 80 lbs. per roll
- Efficiently packaged and sold in pallets of 12 rolls. Rolls can fit easily into a standard pickup truck
- 3" selvedge edge (non-adhesive) provided along one of the 40' factory-length edges, allowing for the use of 3" seam tape for seaming
- End laps or cut sections are easily stripped-in with 6" Cured Cover Tape (sold separately)

## Ideal Applications

- Residential or urban low-slope roofs
- Confined or hard-to-reach roof areas
- High-rise installations

## Additional Benefits

- Up to 80% faster installation versus the use of traditional bonding adhesive
- Low-odor formula minimizes occupant disruption
- Black SA EPDM can be applied in temperatures as low as 20°F
- White-on-black SA EPDM can be applied in temperatures as low as 32°F

Item Number	Description	Coverage	Weight Per Roll
07MHAS6540	60-mil, Black, 5' x 40'	190 sq. ft. After Seaming	Approx. 80 lbs.
07MHAS654W	60-mil, White-on-Black, 5' x 40'	190 sq. ft. After Seaming	Approx. 80 lbs.

Sold by the pallet in quantities of 12. Weight per pallet is 1,064 lbs.



5' x 40' SA EPDM.



5' wide rolls.



Fits in the back of a pickup truck.

# 5-ft x 40-ft Self-Adhering EPDM

Easy Portability and Fast Installation




## 3" Selvedge Edge

- 3" non-adhesive selvedge edge strip along one 40' factory-length edge, designed for 3" seam tape application.



Bottom of factory edge.

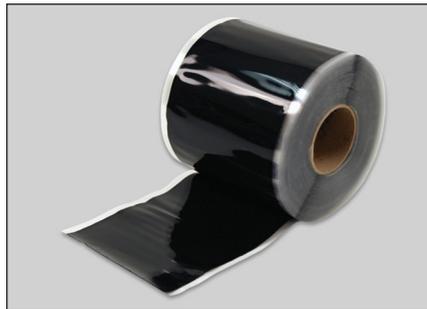

3" Seam Tape. Also available in white.  
*(Sold Separately)*

## 6" Cured Cover Tape

- Required to seal end laps or any cut seams at the bottom of factory edge.



Cured Cover Tape. Also available in white.  
*(Sold Separately)*

The information herein should not be considered all-inclusive and should always be accompanied by a review of the MuleHide specifications and guidelines and good application practices.

This information herein is based upon data and knowledge considered to be true and accurate at the time of printing and is provided for the reader's consideration, investigation and verification. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. ("MuleHide"). MuleHide does not warrant any results to be obtained. Statements concerning possible use of MuleHide products are made without knowledge of your particular roof and such an application may not be fit for your particular purpose. MULEHIDE DISCLAIMS ALL WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, except written warranties attached to MuleHide products and written warranties signed by an officer of MuleHide.

Visit the MuleHide website at [www.mulehide.com](http://www.mulehide.com) prior to any installation for updated technical specifications and details. MuleHide is a U.S. registered trademark. All rights reserved. REV 1 1/26