

APP Torch G Premier

APP Modified Bitumen Granulated Cap Sheet



The Right Choice for Low-Slope Roofing Products

800-786-1492 • mulehide.com

Rugged • Time-Tested • Weather-Tested

APP TORCH G PREMIER & APP TORCH G FR PREMIER

A premium, polyester reinforced APP modified bitumen roofing membrane (with fire retardant additives)* designed for heat-welded (torch) applications. Constructed with premium Atactic Polypropylene resins and incorporating superior polyester reinforcing, APP Torch G Premier & APP Torch G FR Premier provides an easy-to-install, long-term weathering durable roofing solution. APP Torch G Premier & APP Torch G FR Premier have a granulated surface available in several colors, a polyolefin backing and features FASTLap® technology for granular-free end laps. FASTLap provides greater ease and speed of application as well as improved long term weathering performance. APP Torch G Premier & APP Torch G FR Premier exceeds all minimum ASTM standards for tensile strength, puncture resistance and flexibility.

BASIC USES

APP Torch G Premier & APP Torch G FR Premier Membranes are designed for application as a heat-welded (torch) applied cap sheet or flashing. Applications include new roofing, recover (retrofit) and BUR repairs. The system must be installed over an acceptable substrate or as part of a multi-ply system. It is not intended to be installed directly to a combustible substrate.


*APP Torch G FR Premier only

Description	Thickness	Coverage	Weight	Carton
32' 10" x 39-3/8" (10m x 1m)	4.5mm (180mils)	100 ft ²	110 lbs.	1 Sq. Roll

APP Torch G Premier	
Product Code	Color
06MHATGBU	Buff
06MHATGBK	Black
06MHATGCH	Chestnut
06MHATGSL	Slate
06MHATGOA	Oak
06MHATGHB	Heather Blend
06MHATGRB	Red Blend
06MHATGPG	Pine Green
06MHATGWW	Weatherwood
06MHATGWH	White

APP Torch G FR Premier	
Product Code	Color
06MHATGFBU	Buff
06MHATGFBK	Black
06MHATGFCH	Chestnut
06MHATGFSL	Slate
06MHATGFOA	Oak
06MHATGFHB	Heather Blend
06MHATGFRB	Red Blend
06MHATGFPG	Pine Green
06MHATGFWW	Weatherwood
06MHATGFWH	White

MORE INFO

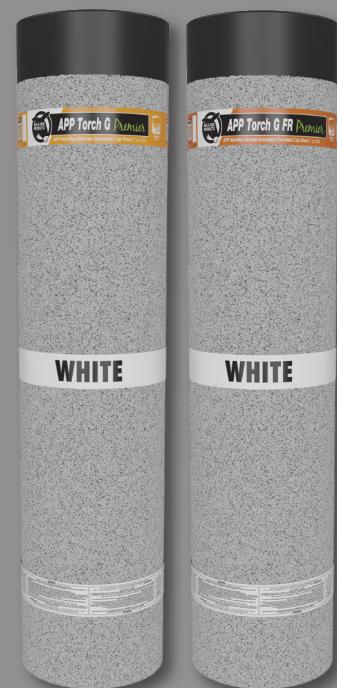

G: D6222 TYPE I
G FR: D6222 TYPE I, GRADE G

The information herein should not be considered all-inclusive and should always be accompanied by a review of the MuleHide specifications and guidelines and good application practices.

This information herein is based upon data and knowledge considered to be true and accurate at the time of printing and is provided for the reader's consideration, investigation and verification. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. ("MuleHide"). MuleHide does not warrant any results to be obtained. Statements concerning possible use of MuleHide products are made without knowledge of your particular roof and such an application may not be fit for your particular purpose. MULEHIDE DISCLAIMS ALL WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, except written warranties attached to MuleHide products and written warranties signed by an officer of MuleHide.

Visit the Mule-Hide website at www.mulehide.com prior to any installation for updated technical specifications and details. MuleHide is a U.S. registered trademark. All rights reserved. REV 1 12/24

Various code approvals are available including: Factory Mutual, Underwriters Laboratories, Miami-Dade, Florida Product Approval, ICC-ESR and Texas Department of Insurance. Contact MuleHide Technical Department for specific ratings.