

Seal-Fast® Liqui-Flash

Polyurethane Roofing Sealant



The Right Choice for Low-Slope Roofing Products

800-786-1492 • mulehide.com

Rugged • Time Tested • Weather Tested

Seal-Fast® Liqui-Flash is a 100% solids, high build liquid applied sealant designed to seal complex details quickly and permanently. It is a quick, effective and permanent solution.

Product Description

Seal-Fast® Liqui-Flash is a flashing grade single component polyurethane roof sealant used in the construction of liquid flashing systems and sealing pitch pockets and pans, metal roof seams & fasteners, inlaid gutters, polyurethane foam, Asphalt Modified Bitumen, PVC, and EPDM roofs. It may also be used on TPO roofs when primed with Mule-Hide Products Si TPO Primer. It is ideal for repairing hail damaged polyurethane foam roofs. It may also be used in conjunction with custom manufactured Mule-Hide Products Shape Shift and metal pitch pockets which can be combined to produce pans of various sizes and shapes. Liqui-Flash is compatible with Mule-Hide acrylic and silicone roof coatings.

Packaging

Liqui-Flash is available in white, black or gray. Packaged in 10 oz. caulk tubes, 20 oz. Sausage tubes, 1 gallon pails and 3.5 gallon pails.

Application

Begin with a clean surface for proper adhesion. It is recommended that the roof surfaces be cleaned with Mule-Hide 115 Cleaner. Si TPO Primer is required for adhesion to new and aged TPO.

1. Liqui-Flash is a one component ready-to-use material that requires no mixing or preparation.
2. A quality caulking gun should be used with 10 oz. tubes. Sausage tubes can be used with a quality caulk gun or simply cut the end and squeeze out.
3. Liqui-Flash may also be applied by brush or trowel.
4. If there is a concern related to potential adhesion of this product to a specific substrate, an adhesion test should be performed. Contact Mule-Hide's Technical Department for more information.



Packaging:

- 10 oz. Caulk Tube
- 20 oz. Sausage Tube
- 1 Gallon Pail
- 3.5 Gallon Pail

Code Approvals/Compliance:

- ASTM C-920, Type S
- Fed Spec TT-S-00230c, Class A, Type II
- Canadian Standards Board
CAN 19, 13-M87



Seal-Fast® Liqui-Flash

Polyurethane Roofing Sealant

Used as a component within these systems:



Coverage Rates		
Packaging	Thickness	Coverage
10 oz. Caulk Tube	1/4" bead	25 ln. ft.
20 oz. Sausage Tube	60-Mils	2 sq. ft.
1 Gallon Pail	60-Mils	25 sq. ft.
3.5 Gallon Pail	60-Mils	87.5 sq. ft.


Features & Benefits

- Ideal maintenance and repair product
- No fabric reinforcement required
- Reduce labor
- One-step application
- Easy to apply and brush
- Excellent elongation and strong tensile strength
- Non-yellowing, UV stable
- Excellent adhesion to a wide variety of substrates
- 100% solids
- No stirring required
- Shelf life of 2 years

Uses

Ideal for sealing & waterproofing these and many other difficult to access areas:

- Flashings
- Skylights
- Pitch Pockets
- Gutters
- Air Conditioners
- Brick ties
- Roof vents
- Penetrations
- Ductwork
- Roof Hatches
- Chimneys
- Seams

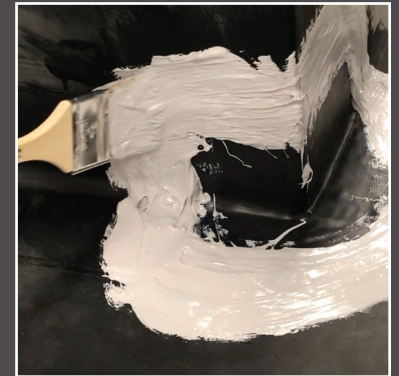

Application with brush



Application with ribbon nozzle

MORE INFO



The information herein should not be considered all-inclusive and should always be accompanied by a review of the Mule-Hide specifications and guidelines and good application practices.

This information herein is based upon data and knowledge considered to be true and accurate at the time of printing and is provided for the reader's consideration, investigation and verification. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. Mule-Hide Products Co., Inc. does not warrant any results to be obtained. Statements concerning possible use of Mule-Hide products are made without knowledge of your particular roof and such an application may not be fit for your particular purpose. MULE-HIDE DISCLAIMS ALL WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, except written warranties attached to Mule-Hide products and written warranties signed by an officer of Mule-Hide.

Visit the Mule-Hide website at www.mulehide.com prior to any installation for updated technical specifications and details. Mule-Hide is a U.S. registered trademark. All rights reserved.