

ShapeShift® Pitch Pans

Corners and Straights



The Right Choice for Low-Slope Roofing Products

800-786-1492 • mulehide.com

Rugged • Time-Tested • Weather-Tested

ShapeShift Pitch Pans

ShapeShift pitch pans consist of straight and corner sections which snap together to create an endless number of pitch pan sizes to seal around roof projections. The radius corner pieces measure approximately 2"x2". The straight sections measure approximately 3" long. The high-strength polymer pieces have a 2-1/2" base flange with a 1-3/4" high side. The pieces snap together with interlocking joints. The smallest pitch pan available is 4"x4" (4 corner pieces). The maximum size is unlimited.

ShapeShift pitch pans can be used on horizontal surfaces of mod bit roof systems to flash penetrations. ShapeShift pitch pans may also be used on vertical surfaces of EPDM, TPO, PVC/KEE HP or mod bit roof systems to flash penetrations.





MP Liquid Sealant - Semi-Self-Leveling

A 100% solids, non-shrink, one-part polyurethane pourable sealer seals:

- Metal roof seams and fasteners
- Gutters
- Damaged polyurethane foam
- Roof projections on horizontal surfaces over mod bit and BUR roofing systems

Installation Instructions

- Roof surface must be clean and dry.
- Prime surface as required with appropriate primer. Refer to ShapeShift product data sheet for more details.
- To construct the pitch pan, snap necessary corners and straights together to desired size and shape.
- Ensure there is at least 1" clearance between all projections, and between the projections and the wall of the pitch pan.
- Apply three beads of JTS 1 sealant on the underside of the flange and firmly set the ShapeShift pitch pan on roof surface. **For vertical surfaces**, fasten pitch pan with appropriate fasteners through the holes provided on the inside flange. Fastener spacing is 6" on center.
- Apply a bead of JTS 1 around the outside edge of the pan flange.
- Fill pitch pan with MP Liquid Sealant, crowning the top to shed water. **For vertical surfaces**, fill pitch pan with JTS 1 and level to the top of the pan wall. Ensure there are no gaps or openings in the sealant around or between the projections. Do not use black sealant if used on TPO or PVC/KEE HP.

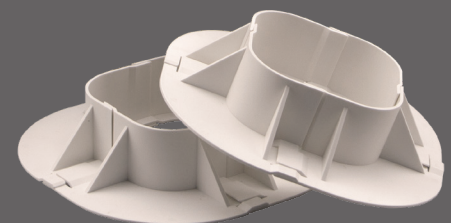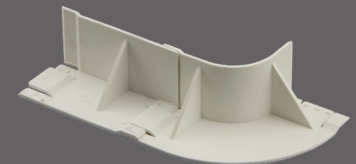

Packaging:

- Straights - 16/carton
- Corners - 16 and 48/carton

ShapeShift® Pitch Pans

Corners and Straights



Frequently Asked Questions

Are the pitch pan pieces available in other colors?

No. Pitch pan pieces are manufactured from a white high-strength polymer.

Is this product approved on MuleHide warranted systems?

Yes, MuleHide warrants the use of ShapeShift pitch pans in all system warranties when properly installed.

Is it necessary to prime the membrane before installation?

ShapeShift pitch pans require priming on certain surfaces to ensure proper adhesion of the pan itself. Refer to ShapeShift product data sheet for more details.

Do I have to prime inside surfaces of the pitch pan and projections before filling?

When used on EPDM, TPO or PVC/KEE HP membrane systems, appropriate primer is required. Refer to ShapeShift product data sheet for more details.

Is there an outside corner piece to make an "L" shaped pan?

No. Although it can be made in any size, the pans must either be a square or a rectangle.

What colors is MP Liquid Sealant offered in?

MP Liquid Sealant is available in white or black in 2-liter pouches. (4/per 3.5-Gallon pail).

Can ShapeShift really be installed on a wall?

Absolutely, and it's approved for use on MuleHide system warranties. When filled with JTS 1 sealant, ShapeShift pitch pans provide an excellent way to flash those troublesome cables or conduits that penetrate parapet walls when a pre-fabricated pipe boot or split pipe boot will not work.

Are extra pieces available?

Cartons are available in straights and corners. A carton of straights contains 16 pieces. A carton of corners contains 16 or 48 pieces.

Will ShapeShift pitch pans work with Black One-Part Pourable Sealer?

Yes, Black One-Part Pourable Sealer may be used instead of MP Liquid Sealant on horizontal installations using EPDM. Primer is not needed inside of the ShapeShift pitch pan prior to filling.

Will ShapeShift pitch pans work with One-Part Pourable Sealer?

Yes, Black One-Part Pourable Sealer may be used instead of MP Liquid Sealant on horizontal installations over mod bit. When used on mod bit, primer is not needed inside the ShapeShift pitch pan prior to filling.



Horizontal installation with
MP Liquid Sealant



Vertical installation with JTS 1

Item Number	Description	Gross Weight (lbs)	Units Per Pallet
08MHSSPS16	Straights 16/Carton	1.5	140
08MHSSPC16	Corners 16/Carton	1.7	140
08MHSSPC48	Corners 48/Carton	5.25	36

The information herein should not be considered all-inclusive and should always be accompanied by a review of the MuleHide specifications and guidelines and good application practices.

This information herein is based upon data and knowledge considered to be true and accurate at the time of printing and is provided for the reader's consideration, investigation and verification. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. ("MuleHide"). MuleHide does not warrant any results to be obtained. Statements concerning possible use of MuleHide products are made without knowledge of your particular roof and such an application may not be fit for your particular purpose. MULEHIDE DISCLAIMS ALL WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, except written warranties attached to MuleHide products and written warranties signed by an officer of MuleHide.

Visit the MuleHide website at www.mulehide.com prior to any installation for updated technical specifications and details. MuleHide is a U.S. registered trademark. All rights reserved. REV 2 7/26