



"The name trusted in roofing since 1906"

SINGLE-PLY ROOFING

ACCESSORIES GUIDE

TABLE OF CONTENTS



EPDM

| | |
|---------------------------|-----|
| Membranes | 3 |
| Adhesives & Sealants..... | 4-5 |
| Seaming | 6-7 |
| Flashing | 8-9 |
| Accessories | 10 |

TPO

| | |
|---------------------------|-------|
| Membranes | 11 |
| Adhesives & Sealants..... | 12-13 |
| Seaming | 14 |
| Flashing | 15-17 |
| Colorway | 18-19 |
| Accessories | 20 |

PVC

| | |
|---------------------------|-------|
| Membranes | 21 |
| Adhesives & Sealants..... | 22 |
| Sealants & Seaming..... | 23 |
| Flashing | 24-26 |
| Accessories | 27 |

Mod Bit

| | |
|---------------------------|-------|
| Membranes | 28-29 |
| Cap Sheet Colors | 30 |
| Adhesives & Sealants..... | 31 |

Multi-System Accessories

| | |
|----------------------------|-------|
| Fasteners/Plates/Bars..... | 32-34 |
| Low-Rise Adhesive | 35-36 |
| Roof Drains..... | 37-39 |
| Roof Insulation | 40 |
| Cover Boards..... | 40-41 |
| Air & Vapor Barrier | 41 |
| Edge Metal | 42-43 |
| Caulks & Sealants..... | 44 |
| ShapeShift Line..... | 45 |
| Notes..... | 46-47 |

EPDM

ETHYLENE PROPYLENE DIENE MONOMER

STANDARD BLACK EPDM MEMBRANE (45-Mil & 60-Mil) Used as an elastomeric single-ply roofing membrane for new construction and reroofing applications. May be installed in ballasted and fully adhered roofing systems. Standard Black EPDM Membranes are Fire Retardant (FR) membranes.

FR EPDM MEMBRANE (PRE-CLEANED 60-Mil & 90-Mil) Used as an elastomeric single-ply roofing membrane for new construction and reroofing applications. Pre-cleaned 60-mil and 90-mil membranes are primarily used in fully adhered roofing systems, but can also be ballasted.

STANDARD & FR REINFORCED EPDM MEMBRANE (45-Mil, 60-Mil & 75-Mil) Used in mechanically attached and fully adhered roofing systems in new construction, reroofing and recover (retrofit) applications. It may also be used as flexible membrane flashings for walls, curbs, etc; when installing EPDM membrane roofing systems. The system must be installed over acceptable roof insulation or other suitable substrate. See the MuleHide EPDM Specifications Manual for complete specifications and details.

WHITE-ON-BLACK EPDM MEMBRANE (60-Mil & 90-Mil) Used primarily in fully adhered roofing systems on new construction, reroofing and recover (retrofit) applications. The 60-mil membrane may also be used as flexible membrane flashings for walls, curbs, etc; when installing EPDM membrane roofing systems. The system must be installed over acceptable roof insulation or other suitable substrate. See the MuleHide Specifications Manual for complete specifications and details.

GRAY EPDM MEMBRANE (60-Mil) Used primarily in fully adhered roofing systems, Gray EPDM offers reflectivity while still providing use in markets where heating and cooling costs are more balanced. Also added slip resistance of rubber and less glare compared to typical white roofs.

POLYEPICHLOROHYDRIN (ECO/CO) Used as a protective overlayment on EPDM Roofing Systems having positive drainage offering increased resistance to hydrocarbons, solvents, grease and oils.

Other EPDM Membranes Available: Self-Adhered, Pre-Taped, Low-Talc and Clean Sheet




Membrane Thickness

45-Mil

60-Mil

75-Mil

90-Mil

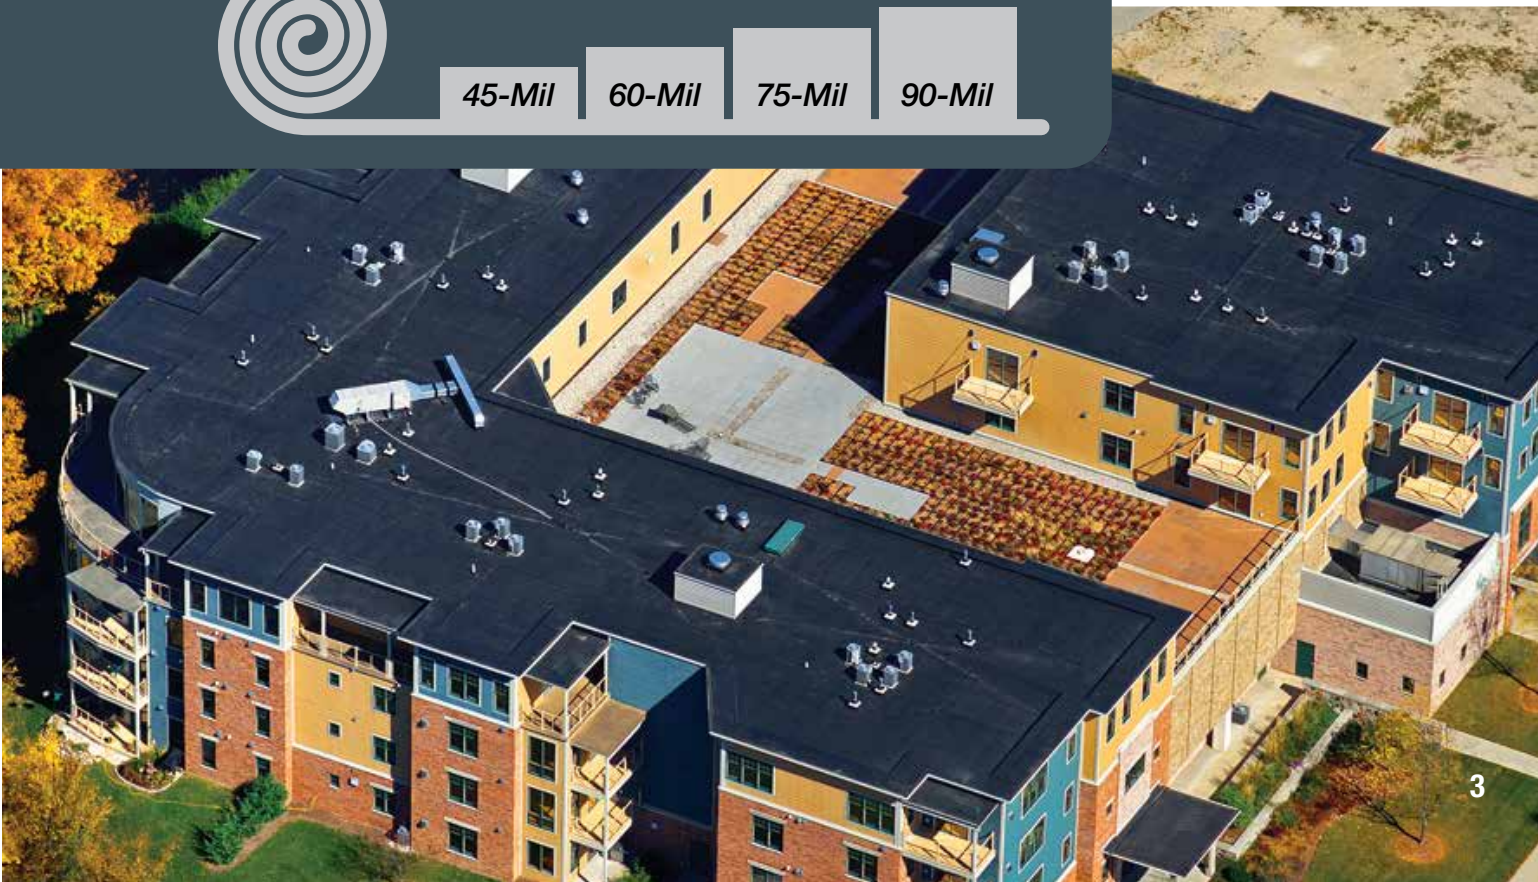

EPDM ADHESIVES & SEALANTS



EPDM TPO

AEROWEB LOW-VOC AEROSOL CONTACT ADHESIVE

AeroWeb Low-VOC Contact Adhesive/Primer with its web-like spray pattern is a versatile option for Standard TPO & EPDM on vertical & horizontal surfaces, adhering Fleece Back (vertical app only), enhancing the bond between F5 Air & Vapor Barrier and various substrates, priming unexposed asphalt prior to applying Helix Max for insulation attachment.

| Product Code | Description | Carton | Shelf Life |
|--------------|---|--------|------------|
| 08MHAWAP40 | AeroWeb LV Adhesive/Primer | 1 | 1 Year |
| 08MHCCGH6 | 6' Hose | 1 | N/A |
| 08MHCCGH12 | 12' Hose | 1 | |
| 08MHCCGH18 | 18' Hose | 1 | |
| 08MHCCGSGN | Spray Gun (for vertical) | 1 | |
| 08MHCCGSGV | Spray Gun with 24" extension (for horizontal) | 1 | |



ACRYLIC WATER BASE BONDING ADHESIVE

Used for single-side, wet, horizontal application of EPDM to acceptable HD wood fiberboard, plywood, OSB, DensDeck® Prime Roof Board or SECUROCK® Roof Board. Low-temperature restrictions apply.

EPDM

| Product Code | Description | Carton | Coverage | Shelf Life |
|--------------|---------------|--------|---------------------------|------------|
| 08MHWBBA1 | 1-Gallon Pail | 4 per | 100-120 sq.ft. per gallon | 1 year |
| 08MHWBBA5 | 5-Gallon Pail | 1 per | | |



BONDING ADHESIVE

A high-strength solvent-based contact adhesive that allows quick bonding of EPDM membrane and cured flashings to various porous and non-porous substrates. May be used on both horizontal and vertical surfaces. Formulated for application with a 1/2" (13 mm) medium nap roller.

EPDM

| Product Code | Description | Coverage | Shelf Life |
|--------------|---------------|----------------------|------------|
| 08MHBOND5 | 5-Gallon Pail | 60 sq.ft. per gallon | 1 year |



AQUABASE 120 BONDING ADHESIVE

A two-sided water-based bonding adhesive used to adhere EPDM, Standard TPO, TPO Fleece Back and PVC Fleece Back membranes to approved surfaces. Can be used as a one-sided, wet lay-in adhesive with MuleHide Fleece Back membranes. Low-temperature restrictions apply.

EPDM TPO PVC

| Product Code | Description | Coverage | Shelf Life |
|--------------|---------------|----------------------|------------|
| 08MHAB1205 | 5-Gallon Pail | 60 sq.ft. per gallon | 1 year |



LOW-VOC BONDING ADHESIVE

A high-strength solvent-based contact adhesive that allows bonding of EPDM and TPO to various porous and non-porous substrates. Specially formulated using a blend of VOC exempt and non-exempt solvents to meet the < 250 g/L VOC content requirements of the OTC Model Rule for adhesives and sealants.

1168 LOW-VOC BONDING ADHESIVE

This version meets requirements of California Rule 1168.

EPDM TPO

| Product Code | Description | Coverage | Shelf Life |
|--------------|-------------------------------|----------------------|------------|
| 08MHETBLV1 | 1-Gallon Pail (6/ctn) | 60 sq.ft. per gallon | 1 year |
| 08MHETBLV5 | 5-Gallon Pail | | |
| 08MH11685 | 1168 California 5-Gallon Pail | | |

EPDM ADHESIVES & SEALANTS



EPDM X-23 LOW-VOC BONDING ADHESIVE

A high-strength, solvent-based contact adhesive that bonds EPDM membranes to various porous and non-porous substrates.

EPDM

| Product Code | Description | Weight | Coverage | Shelf Life |
|--------------|---------------|---------|----------------------|------------|
| 08MHBLX235 | 5-Gallon Pail | 42 lbs. | 60 sq.ft. per gallon | 1 year |



POURABLE SEALER

A two-component, solvent-free, polyurethane-based product compatible with MuleHide EPDM systems. Designed to provide a flexible, yet long lasting seal around hard to flash penetrations through the roof deck.

EPDM

| Product Code | Description | Weight | Coverage | Shelf Life |
|--------------|--------------------------------|---------|------------|------------|
| 08MHPSLR | 1-Gallon/1-Pint (2 per carton) | 18 lbs. | 200 cu.in. | 1 year |



BLACK ONE-PART POURABLE SEALER

Designed for use with EPDM Pourable Sealant Pockets. The sealant's one-part, pourable consistency allows for quick pocket filling without mixing.

EPDM

| Product Code | Description | Weight | Coverage | Shelf Life |
|--------------|-----------------------------------|---------|------------|------------|
| 08MHPSOPBK | 1/2-Gallon Pouches (4 per carton) | 26 lbs. | 200 cu.in. | 1.5 years |



THERMOPLASTIC ONE-PART POURABLE SEALER (WHITE)

Designed for use with TPO, PVC & EPDM Pourable Sealer Pockets. The sealant's one-part, pourable consistency allows for quick pocket filling without mixing.

EPDM TPO PVC

| Product Code | Description | Weight | Coverage | Shelf Life |
|--------------|-----------------------------------|---------|------------|------------|
| 08MHTPSWHE | 1/2-Gallon Pouches (4 per carton) | 29 lbs. | 122 cu.in. | 1 year |



WATER CUT-OFF MASTIC

Used to seal roofing membranes to stop water penetration into the roofing system. Common uses are at drain terminations and behind MuleHide All Purpose Bars at wall terminations.

LOW-VOC WATER CUT-OFF MASTIC

EPDM TPO PVC

| Product Code | Description | Weight | Coverage | Shelf Life |
|--------------|----------------------------|---------|--------------------------|------------|
| 08MHWTRC | 11-oz Tube (25 per carton) | 27 lbs. | 10 Ln.ft. with 1/2" bead | 1 year |
| 08MHLVWTRC | | | | |



UNIVERSAL SINGLE-PLY SEALANT

A 100% solids, solvent-free, one-part, polyether sealant that provides a weather-tight seal to a variety of building substrates. Provides excellent adhesion to substrates such as stone, masonry, ceramic, marble, wood, steel, aluminum, most plastics and composites. Not recommended as a glass-glazing sealant.

EPDM TPO PVC

| Product Code | Description | Weight | Coverage | Shelf Life |
|--------------|---------------------------------|---------|--------------------------|------------|
| 08MHUSPSWH | 10.1-oz Tube, White (24/carton) | 24 lbs. | 25 Ln.ft. with 1/4" bead | 1 year |
| 08MHUSPSG | 10.1-oz Tube, Gray (24/carton) | | | |

EPDM SEAMING



TAPE PRIMER

A solvent-based product designed for one-step cleaning and priming of EPDM surfaces to be bonded with In-Seam Tapes, Uncured Flashing Tapes, Cured Cover Tapes and Pre-Taped membranes.

EPDM



LOW-VOC PRIMER

A low-VOC product designed for one-step cleaning and priming of EPDM and TPO surfaces prior to the application of In-Seam Tapes and other taped products. Specially formulated using a blend of VOC exempt and non-exempt solvents to meet the < 250 g/L VOC content requirements of the OTC Model Rule for adhesives and sealants.

EPDM

TPO

| Product Code | Description | Carton | Coverage | Shelf Life |
|--------------|---------------|--------|-----------------------|------------|
| 08MHTAPR1 | 1-Gallon Pail | 6 per | 250 sq.ft. per gallon | 9 months |

| Product Code | Description | Carton | Coverage | Shelf Life |
|--------------|---------------|--------|-----------------------|------------|
| 08MHEPLV1 | 1-Gallon Pail | 6 per | 250 sq.ft. per gallon | 9 months |



WEATHERED MEMBRANE CLEANER

Used to clean in-service EPDM membrane that has been exposed to the weather, and clean TPO membrane prior to the welding process. Helps to loosen and remove dirt and other contaminants from the surface of the EPDM and TPO membranes and leaves a suitable surface for welding or the subsequent application of Tape Primer.

EPDM TPO

| Product Code | Description | Carton | Coverage |
|--------------|---------------|--------|--------------------------------|
| 08MHTWMC1 | 1-Gallon Pail | 2 per | 400 sq.ft. (1-side) per gallon |
| 08MHTWMC5 | 5-Gallon Pail | 1 per | |



LOW-VOC MEMBRANE CLEANER

Used to clean both new and in-service EPDM, TPO, PVC and PVC KEE membranes prior to the seaming process. This cleaner helps to loosen and remove dirt and other contaminants from the membrane surface and leaves a suitable surface for welding or the subsequent application of Tape Primer.

*Meets California & Utah VOC regulations

EPDM TPO PVC

| Product Code | Description | Carton | Coverage |
|--------------|--------------------------|--------|--------------------------------|
| 08MHTLVMC1 | 1-Gallon Pail / Low-VOC* | 2 per | 400 sq.ft. (1-side) per gallon |
| 08MHTLVMC5 | 5-Gallon Pail / Low-VOC* | 1 per | |



LOW-VOC UN-TACK (CLEANER)

Low-VOC UN-TACK Adhesive Remover & Cleaner is designed to remove adhesives from a variety of surfaces, including metal, vinyl, plastic, rubber, glass and most fabrics. Low-VOC UN-TACK also helps to remove damaged and improperly installed insulation and other materials, including adhesives and contact cements. This product will help prepare surfaces for the application of Hardcast rolled sealants, butyl tapes and other adhesives, while also aiding in their removal.

EPDM TPO

| Product Code | Description | Carton | Shelf Life |
|--------------|-----------------|--------|------------|
| 08MHCCGUT8 | Low-VOC Un-Tack | 1 | 1 Year |



EPDM BLACK LAP SEALANT

Required for sealing EPDM seams and flashings against the effects of weathering when seamed with Splice Adhesive or All-Purpose Single Seal Adhesive.

EPDM

| Product Code | Description | Carton | Coverage | Shelf Life |
|--------------|-------------|--------|---------------------------|------------|
| 08MHLPCB | 11-oz Tube | 25 per | 22 Ln.ft. with 5/16" bead | 1 year |




SPLICE ADHESIVE - BLACK OR WHITE

Used on EPDM membranes for splicing field sheets. Also used to splice uncured EPDM flashing material to cured EPDM membranes. Use White Splice Adhesive when a white (white-on-black) membrane is required. MuleHide Tape Primer must be used to prepare the membrane prior to the application of the adhesive.

Cannot be used on warranted projects.

EPDM

| Product Code | Description | Carton | Coverage | Shelf Life |
|--------------|---------------------|-------------|-------------|------------|
| 08MHSPB1 | Black 1-Gallon Pail | 6 per | 3" = 150 ft | 1 year |
| 08MHSPW1 | White 1-Gallon Pail | | 4" = 120 ft | |
| | | 6" = 100 ft | | |



EPDM IN-SEAM TAPE

A black or white, butyl rubber-based adhesive in tape form. Formulated to provide high green strength in both shear and peel. May be used on ballasted, mechanically attached and fully adhered EPDM roofing systems.

Requires the use of Tape Primer or Low-VOC Primer.

EPDM

| Product Code | Description | Carton | Shelf Life |
|--------------|-----------------|--------|------------|
| 08MHINSMT3 | Black 3" x 100' | 4 per | 1 year |
| 08MHINSMT2 | Black 3" x 25' | 12 per | |
| 08MHINSMT6 | Black 6" x 100' | 2 per | |
| 08MHINST3W | White 3" x 100' | 4 per | |
| 08MHINST6W | White 6" x 100' | 2 per | |

EPDM FLASHING



6" REINFORCED EPDM MEMBRANE STRIPS (RMS)

Used in conjunction with MuleHide 2.4" seam plates and MuleHide HDP fasteners as securement of the EPDM membranes at the base of parapet walls and curbs. Installed beneath the EPDM field sheet and used as an alternate method to using the MuleHide All Purpose Bar.

EPDM

Requires the use of Tape Primer or Low-VOC Primer.



9" REINFORCED EPDM MEMBRANE STRIPS (RMS)

Available in a 9" width with two strips of pre-applied In-Seam Tape. Used to attach EPDM membranes horizontally in the field of the roof on mechanically fastened systems.

EPDM

Requires the use of Tape Primer or Low-VOC Primer.

| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|--------------------------|--------|---------|------------|
| 08MHRMS61T | 6" x 100' Roll w/3" Tape | 2 per | 39 lbs. | 1 year |

| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|------------------------------------|--------|---------|------------|
| 08MHRMS91T | 9" x 100' Roll w/2 Rows of 3" Tape | 1 per | 33 lbs. | 1 year |



CURED COVER TAPE

A nominal 60-mil, cured EPDM membrane strip laminated to nominal 30-mil cured butyl rubber tape and rolled onto a release liner, for a total nominal thickness of 90-mil. Commonly used to strip in metal edging.

EPDM

Requires the use of Tape Primer or Low-VOC Primer.



UNCURED FLASHING TAPE

May be used in conjunction with the MuleHide Tape Primer to flash inside and outside corners, pipes, pitch pockets or other penetrations that require the flashing to be molded or conform to an irregular shape. Not permitted for use in flashing gravel stops, drip aprons or stripping seams or batten bars.

EPDM

Requires the use of Tape Primer or Low-VOC Primer.

| Product Code | Size | Color | Carton | Weight | Shelf Life |
|--------------|-----------|-------|--------|---------|------------|
| 08MHLAT6 | 6" x 100' | Black | 2 per | 56 lbs. | 1 year |
| 08MHLAT9 | 9" x 100' | | 1 per | 42 lbs. | |
| 08MHLAT250 | 12" x 50' | | | 30 lbs. | |
| 08MHLAT62W | 6" x 25' | White | 4 per | 25 lbs. | |
| 08MHLAT61W | 6" x 100' | | 2 per | 57 lbs. | |
| 08MHLAT91W | 9" x 100' | | 1 per | 43 lbs. | |
| 08MHLAT125W | 12" x 50' | | 1 per | 29 lbs. | |
| 08MHCT061G | 6" x 100' | | Gray | 2 per | |
| 08MHCT091G | 9" x 100' | 1 per | | 43 lbs. | |

| Product Code | Size | Color | Carton | Weight | Shelf Life |
|--------------|-----------|-------|--------|---------|------------|
| 08MHUT061B | 6" x 100' | Black | 2 per | 38 lbs. | 6-9 months |
| 08MHUT062B | 6" X 25' | | 8 per | 38 lbs. | |
| 08MHUT095B | 9" x 50' | | 1 per | 15 lbs. | |
| 08MHUT125B | 12" x 50' | | 1 per | 20 lbs. | |
| 08MHUT061W | 6" x 100' | | White | 2 per | |
| 08MHUT095W | 9" x 50' | 1 per | | 24 lbs. | |
| 08MHUT125W | 12" x 50' | 1 per | | 33 lbs. | |
| 08MHUT061G | 6" x 100' | Gray | | 2 per | |
| 08MHUT095G | 9" x 50' | | 1 per | 24 lbs. | |
| 08MHUT125G | 12" x 50' | | 1 per | 33 lbs. | |




EPDM CURB WRAP

Curb Wraps provide an efficient means to flash a curb with EPDM materials. Curb Wrap is pre-cut to a 20" width and has 6" In-Seam Tape pre-applied. Production time can be substantially reduced with this labor saving product.

EPDM

Requires the use of Tape Primer or Low-VOC Primer.

| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|-----------------------------|--------|---------|------------|
| 08MHCW256B | 20" x 50' w/6" Tape, Black | 1 per | 38 lbs. | 1 year |
| 08MHCW252B | 20" x 50' w/20" Tape, Black | | 49 lbs. | |
| 08MHCWT25W | 20" x 50' w/6" Tape, White | | 38 lbs. | |
| 08MHCWT25G | 20" x 50' w/20" Tape, Gray | | 49 lbs. | |



POURABLE SEALER POCKETS

Ideal for sealing irregular, hard to flash penetrations through the membrane. Prefabricated pockets consisting of a 2" (50 mm) wide plastic support strip with attached Uncured EPDM Flashing Tape.

Requires the use of Tape Primer or Low-VOC Primer.

EPDM

| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|-------------|--------|--------|------------|
| 08MHPSP4 | 4" Black | 12 per | 4 lbs. | 9 months |
| 08MHPSP6 | 6" Black | | 5 lbs. | |
| 08MHPSP8 | 8" Black | | 8 lbs. | |
| 08MHPSP6G | 6" Gray | | 5 lbs. | |



PREMOLDED EPDM PIPE BOOTS

Accommodates single pipe sizes from 1" to 6" in diameter. Conical-shaped steps securely seal all single pipe penetrations. The large, double-thick, molded rib at the top of each step offers superior tear-resistance and reinforcement, as well as a cutting guide.

Requires the use of Tape Primer or Low-VOC Primer.

EPDM

| Product Code | Description | Carton | Size | Weight | Shelf Life |
|--------------|----------------------------------|--------|---------|---------|------------|
| 08MHPBTB6T | Black with clamps and tape rings | 10 per | 1" - 6" | 8 lbs. | 1 year |
| 08MHPBTW6T | White with clamps and tape rings | | | 10 lbs. | |
| 08MHPBTG6T | Gray with clamps and tape rings | | | 10 lbs. | |




PRE-CUT INSIDE/OUTSIDE CORNERS

Ideal for installing inside and outside corners. Consists of .060 inch (1.5 mm) thick uncured EPDM flashing material laminated to cured butyl rubber tape and rolled onto a poly release liner providing .090-mils (2.25 mm) of total thickness.

Requires the use of Tape Primer or Low-VOC Primer.

EPDM

| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|----------------|--------|--------|------------|
| 08MHPCC20 | 7" x 9", Black | 20 per | 5 lbs. | 9 months |
| 08MHCPSWH2 | 7" x 9", White | | 8 lbs. | |
| 08MHCPSG2 | 7" x 9", Gray | | 8 lbs. | |



WHITE POURABLE SEALER POCKETS

Prefabricated pockets consisting of a 2" (50 mm) wide plastic support strip with attached Uncured EPDM Flashing Tape ideal for sealing irregular, hard to flash penetrations through the membrane. Use MuleHide Thermoplastic One-Part Pourable Sealer as a white filler.

Requires the use of Tape Primer or Low-VOC Primer.

EPDM

| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|-------------|--------|--------|------------|
| 08MHPSP6WH | 6" White | 12 per | 6 lbs. | 6 months |




T-JOINT PATCHES

Used to seal field splice joints or a horizontal-to-vertical field seam transition. 40-mil (1 mm) thick uncured EPDM flashing material laminated to cured butyl rubber tape and rolled onto a poly release liner for a total thickness of 70-mils (1.75 mm).

Requires the use of Tape Primer or Low-VOC Primer.

EPDM

| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|------------------|--------|---------|------------|
| 08MHETJ6B | 6" x 6", Black | 20 per | 3 lbs. | 9 months |
| 08MHETJ12B | 12" x 12", Black | | 10 lbs. | |
| 08MHETJ6G | 6" x 6", Gray | | 3 lbs. | |

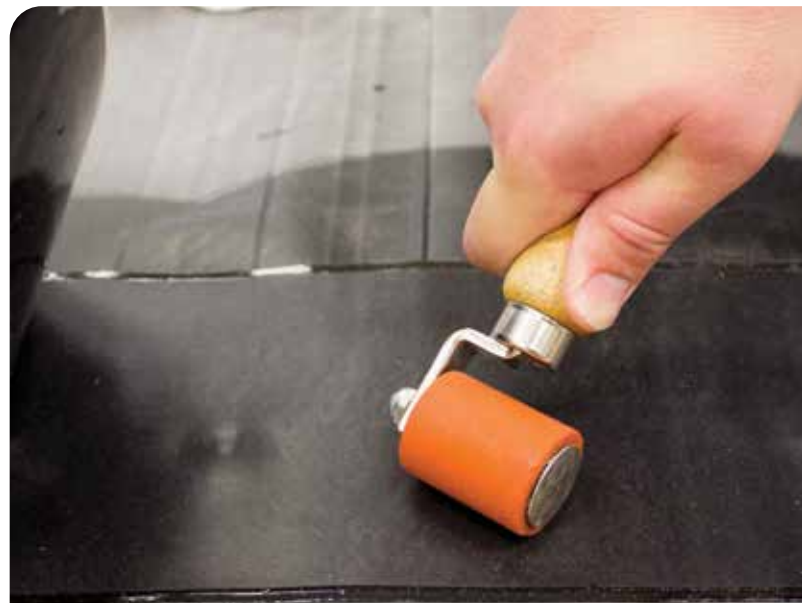

EPDM ACCESSORIES



WALKWAY PADS WITH TAPE

Designed to protect the membrane in areas exposed to repetitive foot traffic. MuleHide requires walkways to be installed at all traffic concentration points, such as roof hatches, access door, rooftop ladders, etc. regardless of traffic frequency. Walkways are also required if regular maintenance (once a month or more) is necessary to service rooftop equipment.

Requires the use of Tape Primer or Low-VOC Primer.

EPDM

| Product Code | Description | Pallet | Weight |
|--------------|-----------------------------|--------|----------|
| 08MHWP303T | Black with tape - 30" x 30" | 50 per | 515 lbs. |
| 08MHWP30WT | White with tape - 30" x 30" | | 496 lbs. |
| 08MHWP30GT | Gray with tape - 30" x 30" | | 500 lbs. |



YELLOW WARNING STRIP

Intended for use on EPDM, TPO or PVC roofing systems to provide a visual warning of an impending hazard (i.e. roof edge, deep drain sump, skylight, etc.) Beneficial when maintenance personnel are frequently on the roof. Cannot be used for flashings or as a coverstrip.

Requires the use of Tape Primer or Low-VOC Primer.

EPDM

TPO

PVC

| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|-------------|--------|---------|------------|
| 08MHTSC61Y | 6" x 100' | 2 per | 41 lbs. | 1 year |



HP PROTECTIVE MAT

A nominal 6 ounce per square yard (140 grams per square meter) UV-resistant polypropylene needle-punched fabric. Can be used above the membrane as a slipsheet for crushed stone, or pavers, or below the membrane as a minimum underlayment mat for mechanically attached or ballasted system applications.

EPDM

TPO

PVC

| Product Code | Description | Coverage | Weight |
|--------------|-------------|--------------|----------|
| 08MHPM153 | 15' X 300' | 4,500 sq.ft. | 225 lbs. |



RUBBER PAVER BLOCKS

An environmentally friendly product that provides superior protection to the underlying membrane. Features a resilient, shock-absorbing, weather-resistant traffic surface. Pavers lock together to provide multi-directional drainage patterns eliminating the need for protective mats. Consists of 90% post-consumer recycled content.

EPDM

TPO

PVC

| Product Code | Description | Dimensions | Weight |
|--------------|-------------|----------------|---------|
| 08MHP222BK | Black | 2" x 24" x 24" | 24 lbs. |
| 08MHP222TC | Terra Cotta | | |

TPO



THERMOPLASTIC POLYOLEFIN

TPO MEMBRANE STANDARD & FR (45-Mil & 60-Mil) Used in mechanically attached and fully adhered roofing systems in new construction, reroofing and recover (retrofit) applications. It may also be used as flexible membrane flashings for walls, curbs, etc. when installing TPO membrane roofing systems. The system must be installed over acceptable roof insulation or other suitable substrate. See the MuleHide TPO Specifications Manual for complete specifications and details.

TPO WITH CLEAN FILM (60-Mil & 80-Mil) Identical product to the TPO Membrane Standard & FR (above) except with a removable film to protect the roof during installation. There is no need to clean the roof after installation—simply remove the film and the roof is ready for final inspection.

SA-TPO MEMBRANE (60-Mil & 80-Mil) Used in fully adhered roofing systems in new construction, reroofing and recover (retrofit) applications. It may also be used as flexible membrane flashings for walls, curbs, etc., when installing TPO-c membrane roofing systems. The system must be installed over acceptable roof insulation or other suitable substrate. See the MuleHide TPO Specifications Manual for complete specifications and details.

TPO EXTRA MEMBRANE (80-Mil) Used in mechanically attached and fully adhered roofing systems in new construction, reroofing and recover (retrofit) applications. It may also be used as flexible membrane flashings for walls, curbs, etc., when installing TPO membrane roofing systems. The system must be installed over an acceptable roof insulation or other suitable substrate. See the MuleHide TPO Specifications Manual for complete specifications and details.

TPO FLEECE BACK MEMBRANE (45-Mil, 60-Mil & 80-Mil) Used in fully adhered and mechanically attached roofing systems in new construction, reroofing and recover (retrofit) applications. The system must be installed over an acceptable roof insulation or other suitable substrate. See the MuleHide TPO Fleece Back Specifications Manual for complete specifications and details.

TPO FLEECE BACK PLUS MEMBRANE (45-Mil, 60-Mil & 80-Mil) Used in fully adhered roofing systems in new construction, reroofing and recover (retrofit) applications, where the roof membrane is adhered with hot asphalt. The system must be installed over an acceptable roof insulation or other suitable substrate. See the MuleHide TPO Fleece Back PLUS Specifications Manual for complete specifications and details.

Other TPO Membranes Available: TPO Fleece Back Plus with Clean Film (60 & 80-mil)



Membrane Thickness

45-Mil

60-Mil

80-Mil



TPO ADHESIVES & SEALANTS



EPDM TPO

AEROWEB LOW-VOC AEROSOL CONTACT ADHESIVE

AeroWeb Low-VOC Contact Adhesive/Primer with its web-like spray pattern is a versatile option for Standard TPO & EPDM on vertical & horizontal surfaces, adhering Fleece Back (vertical app only), enhancing the bond between F5 Air & Vapor Barrier and various substrates, priming unexposed asphalt prior to applying Helix Max for insulation attachment.



TPO

TPO BONDING ADHESIVE

A high-strength solvent-based contact adhesive that allows bonding of MuleHide TPO membrane to various porous and non-porous substrates.

| Product Code | Description | Carton | Shelf Life |
|--------------|---|--------|------------|
| 08MHAWAP40 | AeroWeb LV Adhesive/Primer | 1 | 1 Year |
| 08MHCCGH6 | 6' Hose | 1 | N/A |
| 08MHCCGH12 | 12' Hose | 1 | |
| 08MHCCGH18 | 18' Hose | 1 | |
| 08MHCCGSGN | Spray Gun (for vertical) | 1 | |
| 08MHCCGSGV | Spray Gun with 24" extension (for horizontal) | 1 | |

| Product Code | Description | Coverage | Shelf Life |
|--------------|---------------|----------------------|------------|
| 08MHTBAAM5 | 5-Gallon Pail | 60 sq.ft. per gallon | 1 year |

TPO ADHESIVES & SEALANTS



AQUABASE 120 BONDING ADHESIVE

A two-sided water-based bonding adhesive used to adhere EPDM, Standard TPO, TPO Fleece Back and PVC Fleece Back membranes to approved surfaces. Can be used as a one-sided, wet lay-in adhesive with MuleHide Fleece Back membranes. Low-temperature restrictions apply.



| Product Code | Description | Coverage | Shelf Life |
|--------------|---------------|---------------------------|------------|
| 08MHAB1205 | 5-Gallon Pail | 100-120 sq.ft. per gallon | 1 year |



LOW-VOC BONDING ADHESIVE

A high-strength solvent-based contact adhesive that allows bonding of EPDM and TPO to various porous and non-porous substrates. Specially formulated using a blend of VOC exempt and non-exempt solvents to meet the < 250 g/L VOC content requirements of the OTC Model Rule for adhesives and sealants.



| Product Code | Description | Coverage | Shelf Life |
|--------------|----------------------------------|----------------------|------------|
| 08MHETBLV1 | 1-Gallon Pail (6/ctn) | 60 sq.ft. per gallon | 1 year |
| 08MHETBLV5 | 5-Gallon Pail | | |
| 08MH11685 | 1168 California 5-Gallon Pail | | |

1168 LOW-VOC BONDING ADHESIVE

This version meets requirements of California Rule 1168.



THERMOPLASTIC ONE-PART POURABLE SEALER (WHITE)

Designed for use with TPO, PVC & EPDM Pourable Sealer Pockets. The sealer's one-part, pourable consistency allows for quick pocket filling without mixing.



| Product Code | Description | Weight | Coverage | Shelf Life |
|--------------|--------------------------------------|---------|------------|------------|
| 08MHTPSWHE | 1/2-Gallon Pouches (4 per carton) | 29 lbs. | 122 cu.in. | 1 year |



WATER CUT-OFF MASTIC

Used to seal roofing membranes to stop water penetration into the roofing system. Common uses are at drain terminations and behind MuleHide All Purpose Bars at wall terminations.



| Product Code | Description | Weight | Coverage | Shelf Life |
|--------------|-----------------|---------|-----------------------------|------------|
| 08MHWTRC | 11-oz Tube | 27 lbs. | 10 Ln.ft. with 1/2" bead | 1 year |
| 08MHLVWTRC | (25 per carton) | | | |

LOW-VOC WATER CUT-OFF MASTIC



UNIVERSAL SINGLE-PLY SEALANT

A 100% solids, solvent-free, one-part, polyether sealant that provides a weather-tight seal to a variety of building substrates. Provides excellent adhesion to substrates such as stone, masonry, ceramic, marble, wood, steel, aluminum, most plastics and composites. Not recommended as a glass-glazing sealant.



| Product Code | Description | Weight | Coverage | Shelf Life |
|--------------|---------------------------------|---------|-----------------------------|------------|
| 08MHUSPSWH | 10.1-oz Tube (24 per carton) | 24 lbs. | 25 Ln.ft. with 1/4" bead | 1 year |



TPO CUT-EDGE SEALANT

A thermoplastic compound designed for use at the edge of cut MuleHide TPO membrane seams after the membrane has been welded to itself or to MuleHide TPO Coated Metal.



| Product Code | Description | Coverage | Carton | Shelf Life |
|--------------|--------------|--------------------------|--------|------------|
| 08MHTCESCE | 16-oz Bottle | 250 -275 lf 1/8" bead | 8 per | 1 year |
| 08MHTCELVE | 16-oz Bottle | 250 -275 lf 1/8" bead | 8 per | 1 year |

LOW-VOC CUT-EDGE SEALANT

*Meets California & Utah VOC regulations

TPO SEAMING



WEATHERED MEMBRANE CLEANER

Used to clean in-service EPDM membrane that has been exposed to the weather and clean TPO membrane prior to the welding process. Helps to loosen and remove dirt and other contaminants from the surface of the EPDM and TPO membranes and leaves a suitable surface for welding or the subsequent application of Tape Primer.

EPDM TPO

| Product Code | Description | Carton | Coverage |
|--------------|---------------|--------|---------------------|
| 08MHTWMC1 | 1-Gallon Pail | 2 per | 400 sq.ft. (1-side) |
| 08MHTWMC5 | 5-Gallon Pail | 1 per | per gallon |



LOW-VOC WEATHERED MEMBRANE CLEANER

Used to clean both new and in-service EPDM, TPO, PVC and PVC KEE membranes prior to the seaming process. This cleaner helps to loosen and remove dirt and other contaminants from the membrane surface and leaves a suitable surface for welding or the subsequent application of Tape Primer.

*Meets California & Utah VOC regulations

EPDM TPO PVC

| Product Code | Description | Carton | Coverage |
|--------------|--------------------------|--------|---------------------|
| 08MHTLVMC1 | 1-Gallon Pail / Low-VOC* | 2 per | 400 sq.ft. (1-side) |
| 08MHTLVMC5 | 5-Gallon Pail / Low-VOC* | 1 per | per gallon |



LOW-VOC UN-TACK (CLEANER)

Low-VOC UN-TACK Adhesive Remover & Cleaner is designed to remove adhesives from a variety of surfaces, including metal, vinyl, plastic, rubber, glass and most fabrics. Low-VOC UN-TACK also helps to remove damaged and improperly installed insulation and other materials, including adhesives and contact cements. This product will help prepare surfaces for the application of Hardcast rolled sealants, butyl tapes and other adhesives, while also aiding in their removal.

EPDM TPO

| Product Code | Description | Carton | Shelf Life |
|--------------|-----------------|--------|------------|
| 08MHCCGUT8 | Low-VOC Un-Tack | 1 | 1 Year |



TPO PRIMER

A high-solids, clear (translucent color), polymer-based primer used for priming of TPO surfaces to be bonded with In-Seam Tapes, Uncured Flashing Tapes, Cured Cover Tapes, and Pre-Taped membranes.

TPO

| Product Code | Description | Carton | Coverage | Shelf Life |
|--------------|---------------|--------|-------------------------------|------------|
| 08MHTMP1 | 1-Gallon Pail | 6 per | 250 F ² per gallon | 1 year |



LOW-VOC PRIMER

A low-VOC product designed for one-step cleaning and priming of EPDM and TPO surfaces prior to the application of In-Seam Tapes and other taped products.

EPDM TPO

| Product Code | Description | Carton | Coverage | Shelf Life |
|--------------|---------------|--------|-----------------------|------------|
| 08MHEPLV1 | 1-Gallon Pail | 6 per | 250 sq.ft. per gallon | 9 months |



TPO 45-MIL REINFORCED

Used as cover strips over end lap joints of Fleece Back Membrane. TPO flashing strips may also be used to flash over TPO coated metal joints and to strip-in coated metal flanges. May be used for general repairs where reinforced material is required.

TPO

| Product Code | Description | Roll Size | Carton | Weight |
|--------------|-------------|-----------|--------|---------|
| 08MHTR461W | White | 6" x 100' | 3 per | 32 lbs. |
| 08MHTR461G | Gray | | | |
| 08MHTR461T | Tan | | | |



10" TPO PRESSURE-SENSITIVE RUSS

10" wide TPO Pressure-Sensitive RUSS is used in place of narrow width sheets to secure membrane in the perimeter area of the roof. Allows field membrane to be utilized over the entire roof area. Ideal when multiple perimeter sheets or non-standard perimeter spacings are required.

Requires the use of TPO Tape Primer or Low-VOC Primer.

TPO

| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|------------------|--------|---------|------------|
| 08MHTSR10W | White 10" x 100' | 1 per | 30 lbs. | 1 year |



6" TPO PRESSURE-SENSITIVE RUSS

May be used with TPO and should only be installed on horizontal surfaces using an appropriate MuleHide fastener below the roof membrane providing additional securement at angle changes. RUSS is secured with MuleHide EHD (#15) or HDP (#14) Fasteners and MuleHide 2.4" Seam Plates.

Requires the use of TPO Tape Primer or Low-VOC Primer.

TPO

| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|-----------------|--------|---------|------------|
| 08MHTSR6W | White 6" x 100' | 2 per | 33 lbs. | 1 year |



TPO 60-MIL NON-REINFORCED FLASHING

Primarily used to seal details where field fabrication is necessary, such as drain details, pipe flashings, pitch pocket flashings, seaming joints of the MuleHide TPO Coated Metal and any place where reinforced membrane is not practical.

TPO

| Product Code | Description | Roll Size | Weight | Carton |
|--------------|-------------|-----------|---------|--------|
| 08MHDM125W | White | 12" x 50' | 17 lbs. | 1 per |
| 08MHDM125G | Gray | | | |
| 08MHDM125T | Tan | | | |
| 08MHDM243W | White | 24" x 50' | 17 lbs. | 1 per |
| 08MHDM243G | Gray | | | |
| 08MHDM243T | Tan | | | |



TPO COVER STRIP

Intended to strip in flat metal flanges (i.e. drip edge or self-flashing curb flanges) or rows of fasteners and plates. TPO Cover Strip cannot be used for flashing corners, pipes, T-joints or butt joints on TPO Fleece Back Membrane or any angled metal flanges such as gravel stops or other canted metal edgings.

Requires the use of TPO Tape Primer or Low-VOC Primer.

TPO

| Product Code | Description | Size | Carton | Weight | Shelf Life |
|--------------|-------------|-----------|--------|---------|------------|
| 08MHTSC61W | White | 6" x 100' | 2 per | 48 lbs. | 1 year |
| 08MHTSC61G | Gray | | | | |
| 08MHTSC61T | Tan | | | | |



TPO FLASHING



TPO PIPE SEALS

Designed as an economical flashing for single pipe penetrations on MuleHide TPO Membrane roof systems. TPO Pipe Seals can be used wherever the TPO Pipe Seals may be slipped over the top of the pipe.

TPO

| Product Code | Description | Size | Carton | Weight |
|--------------|-------------|---------------|--------|--------|
| 08MHTP348W | White | 3/4" to 8" OD | 8 per | 8 lbs. |
| 08MHTP348G | Gray | | | |
| 08MHTP348T | Tan | | | |



MOLDED SEALANT POCKETS

Interlocking, two-piece prefabricated pockets of non-reinforced TPO material used to seal pipe clusters or other irregular shaped penetrations. Pockets length can be adjusted from 7-1/2" to 11-1/2" by following the pre-molded cutting lines.

TPO

| Product Code | Description | Size | Carton | Weight |
|--------------|-------------|-------------------|--------|--------|
| 08MHTMSAPW | White | 7-1/2" to 11-1/2" | 5 per | 4 lbs. |
| 08MHTMSAPG | Gray | | | |
| 08MHTMSAPT | Tan | | | |



T-JOINT COVER

Used to seal step-offs at splice intersections. Installation is mandatory on all 60-mil and 80-mil TPO systems and on 45-mil systems where step-offs have not been properly sealed.

TPO

| Product Code | Description | Size | Carton | Weight |
|--------------|-------------|-------------|---------|--------|
| 08MHTTJPWH | White | 4.5" circle | 100 per | 3 lbs. |
| 08MHTTJPGY | Gray | | | |
| 08MHTTJPTN | Tan | | | |



UNIVERSAL CORNERS

Uniform in shape and size, and provide water-tightness at corners formed by TPO coated metal and/or TPO flashing membrane. Provides a neat, finished look to building corners, curbs and parapet flashings with no cutting or stretching required.

TPO

| Product Code | Description | Carton | Weight |
|--------------|-------------|--------|--------|
| 08MHTUCWHE | White | 20 per | 5 lbs. |
| 08MHTUCGYE | Gray | | |
| 08MHTUCTNE | Tan | | |



OUTSIDE CORNERS

Uniform in shape and size, and provide water-tightness at outside corners formed by TPO coated metal and/or TPO flashing membrane. Provides a neat, finished look to building corners, curbs and parapet flashings with no cutting required.

TPO

| Product Code | Description | Carton | Weight |
|--------------|-------------|--------|--------|
| 08MHTOCWH | White | 12 per | 1 lbs. |
| 08MHTOCGY | Gray | | |
| 08MHTOCTN | Tan | | |



INSIDE CORNERS

Uniform in shape and size, and provide water-tightness at inside corners formed by TPO coated metal and/or TPO flashing membrane. Provides a neat, finished look to building corners, curbs and parapet flashings with no cutting required.

TPO

| Product Code | Description | Carton | Weight |
|--------------|-------------|--------|--------|
| 08MHTICWH | White | 12 per | 1 lbs. |
| 08MHTICG | Gray | | |
| 08MHTICTN | Tan | | |



TPO SPLIT PIPE SEALS

Contains a split (cut) and overlap tab that allows the pipe boot to be opened and wrapped around a round pipe with an obstruction. Such obstructions prevent the use of a standard pre-molded pipe boot.

TPO

| Product Code | Description | Size | Carton | Weight |
|--------------|--------------------------|------------|--------|--------|
| 08MHTPSR1W | 1" White Split Pipe Boot | 1" Pipe OD | 8 per | 8 lbs. |
| 08MHTPSR2W | 2" White Split Pipe Boot | 2" Pipe OD | | |
| 08MHTPSR3W | 3" White Split Pipe Boot | 3" Pipe OD | | |
| 08MHTPSR4W | 4" White Split Pipe Boot | 4" Pipe OD | | |
| 08MHTPSR5W | 5" White Split Pipe Boot | 5" Pipe OD | | |
| 08MHTPSR6W | 6" White Split Pipe Boot | 6" Pipe OD | | |



SQUARE TUBE WRAP

Fabricated square penetration flashings made of white 45-mil reinforced TPO membrane. Overall height of the flashings is 11 inches. A split (cut) and overlap tab are incorporated to allow the flashings to be opened and wrapped around a square penetration with an obstruction.

TPO

| Product Code | Description | Size | Carton | Weight |
|--------------|---------------------|---------|--------|--------|
| 08MHTST33W | 3" Square Tube Wrap | 3" x 3" | 8 per | 8 lbs. |
| 08MHTST44W | 4" Square Tube Wrap | 4" x 4" | | |
| 08MHTST55W | 5" Square Tube Wrap | 5" x 5" | | |
| 08MHTST66W | 6" Square Tube Wrap | 6" x 6" | | |



DROP SCUPPER

The prefabricated drop tube scupper with heat-welded seams is an excellent alternative and solution for a through-roof soffit drain and downspout tie in. With an easy heat-weld flange for quick and watertight application.

TPO

Cannot be used on warranted projects. For residential use only.

| Product Code | Description | Diameter | Length |
|--------------|-----------------------------|----------|--------|
| 08MHTSCD2W | TPO 2" Drop Scupper - White | 1-7/8" | 7-1/2" |
| 08MHTSCD2T | TPO 2" Drop Scupper - Tan | 1-7/8" | |
| 08MHTSCD2G | TPO 2" Drop Scupper - Gray | 1-7/8" | |
| 08MHTSCD3W | TPO 3" Drop Scupper - White | 2-5/8" | |
| 08MHTSCD3T | TPO 3" Drop Scupper - Tan | 2-5/8" | |
| 08MHTSCD3G | TPO 3" Drop Scupper - Gray | 2-5/8" | |



THROUGH WALL SCUPPER

The prefabricated membrane-coated scupper insert-detail with heat-welded seams is a superior detail to the galvanized scupper sleeve and bonding-adhesive alternative.

TPO

| | | Clad Metal Through Wall Box | | |
|--------------|-------------------------------------|-----------------------------|----|----|
| Product Code | Description | L | H | W |
| 08MHTSCT4W | TPO 4" Through Wall Scupper - White | 16" | 4" | 4" |
| 08MHTSCT4G | TPO 4" Through Wall Scupper - Gray | | | |
| 08MHTSCT4T | TPO 4" Through Wall Scupper - Tan | | | |
| 08MHTSCT6W | TPO 6" Through Wall Scupper - White | | 6" | 6" |
| 08MHTSCT6G | TPO 6" Through Wall Scupper - Gray | | | |
| 08MHTSCT6T | TPO 6" Through Wall Scupper - Tan | | | |



BREATHER VENTS

Prefabricated two-way, or static, vents allow proper ventilation of attic spaces below TPO membranes. The reinforced membrane flange allows for quick installation by centering vent over opening and welding to the field membrane.

TPO

| Product Code | Description | Dia. | Length | Net Free Area | Spacing |
|--------------|---------------------------------|------|--------|---------------|-------------------|
| 08MHTBV1W | TPO 1-Way Breather Vent - White | 4" | 8" | N/A | 1 per 1,000 sq ft |
| 08MHTBV1G | TPO 1-Way Breather Vent - Gray | | | N/A | |
| 08MHTBV1T | TPO 1-Way Breather Vent - Tan | | | N/A | |
| 08MHTBV2W | TPO 2-Way Breather Vent - White | | | 12-sq.in. | |
| 08MHTBV2G | TPO 2-Way Breather Vent - Gray | | | | |
| 08MHTBV2T | TPO 2-Way Breather Vent - Tan | | | | |



VENT COLLAR COMBO

Prefabricated flashing for hot stacks, dryer vents or static attic vents that come complete with painted metal sleeve and vent caps. Large target base patch allows for quick installation by simply screwing the metal sleeve to the deck and then welding the target base to the field membrane.

TPO

Cannot be used on warranted projects. For residential use only.

| Product Code | Description | Diameter | Height | Spacing |
|--------------|-------------------------------|----------|--------|-------------------|
| 08MHRVOCW | TPO Vent Collar Combo - White | 8-1/4" | 5-3/4" | 1 per 1,500 sq ft |
| 08MHRVOCG | TPO Vent Collar Combo - Gray | | | |
| 08MHRVOCT | TPO Vent Collar Combo - Tan | | | |

TPO COLORWAY



COLOR OPTIONS:

* Colors shown are matched as accurately as possible, but may vary slightly from finished product.



| Product Code | Description | Size | Packaging | Weight |
|-------------------------------------|---------------|-----------|-----------|---------|
| .060 NON-REINFORCED FLASHING | | | | |
| 08MHDM24MZ | Medium Bronze | 24" x 50' | 1/carton | 33 lbs. |
| 08MHDM24PG | Patina Green | | | |
| 08MHDM24RB | Rock Brown | | | |
| 08MHDM24SG | Slate Gray | | | |
| 08MHDM24TC | Terra Cotta | | | |
| CONTOUR RIB PROFILE | | | | |
| 08MHTCR1MZ | Medium Bronze | 10' | 20/carton | 84 lbs. |
| 08MHTCR1PG | Patina Green | | | |
| 08MHTCR1RB | Rock Brown | | | |
| 08MHTCR1SG | Slate Gray | | | |
| 08MHTCR1TC | Terra Cotta | | | |
| COATED METAL | | | | |
| 08MHCM48MZ | Medium Bronze | 4' x 10' | 5/pallet | 63 lbs. |
| 08MHCM48PG | Patina Green | | | |
| 08MHCM48RB | Rock Brown | | | |
| 08MHCM48SG | Slate Gray | | | |
| 08MHCM48TC | Terra Cotta | | | |
| UNIVERSAL CONICAL BOOT | | | | |
| 08MHTC16MZ | Medium Bronze | 1" - 6" | 8/carton | 6 lbs. |
| 08MHTC16PG | Patina Green | | | |
| 08MHTC16RB | Rock Brown | | | |
| 08MHTC16SG | Slate Gray | | | |
| 08MHTC16TC | Terra Cotta | | | |

An industry exclusive! TPO Colorway membranes now have matching pre-fabricated accessories including split pipe boots, coated metal, conical boots, inside and outside corners, t-joint patches and more. Match your roof surface with complimentary edge metal colors for an architectural look and feel.

| Product Code | Description | Size | Packaging | Weight | |
|-------------------------|------------------|---------|-----------|----------|--------|
| SPLIT PIPE BOOTS | | | | | |
| 08MHTSB1MZ | 1" Medium Bronze | 1" Pipe | 8/carton | 4 lbs. | |
| 08MHTSB1PG | 1" Patina Green | | | | |
| 08MHTSB1RB | 1" Rock Brown | | | | |
| 08MHTSB1SG | 1" Slate Gray | | | | |
| 08MHTSB1TC | 1" Terra Cotta | | | | |
| 08MHTSB2MZ | 2" Medium Bronze | 2" Pipe | | 8/carton | 4 lbs. |
| 08MHTSB2PG | 2" Patina Green | | | | |
| 08MHTSB2RB | 2" Rock Brown | | | | |
| 08MHTSB2SG | 2" Slate Gray | | | | |
| 08MHTSB2TC | 2" Terra Cotta | | | | |
| 08MHTSB3MZ | 3" Medium Bronze | 3" Pipe | 8/carton | | 5 lbs. |
| 08MHTSB3PG | 3" Patina Green | | | | |
| 08MHTSB3RB | 3" Rock Brown | | | | |
| 08MHTSB3SG | 3" Slate Gray | | | | |
| 08MHTSB3TC | 3" Terra Cotta | | | | |
| 08MHTSB4MZ | 4" Medium Bronze | 4" Pipe | | 8/carton | 6 lbs. |
| 08MHTSB4PG | 4" Patina Green | | | | |
| 08MHTSB4RB | 4" Rock Brown | | | | |
| 08MHTSB4SG | 4" Slate Gray | | | | |
| 08MHTSB4TC | 4" Terra Cotta | | | | |
| 08MHTSB5MZ | 5" Medium Bronze | 5" Pipe | 8/carton | | 6 lbs. |
| 08MHTSB5PG | 5" Patina Green | | | | |
| 08MHTSB5RB | 5" Rock Brown | | | | |
| 08MHTSB5SG | 5" Slate Gray | | | | |
| 08MHTSB5TC | 5" Terra Cotta | | | | |
| 08MHTSB6MZ | 6" Medium Bronze | 6" Pipe | | 8/carton | 8 lbs. |
| 08MHTSB6PG | 6" Patina Green | | | | |
| 08MHTSB6RB | 6" Rock Brown | | | | |
| 08MHTSB6SG | 6" Slate Gray | | | | |
| 08MHTSB6TC | 6" Terra Cotta | | | | |
| OUTSIDE CORNERS | | | | | |
| 08MHTOCMZ | Medium Bronze | NA | 12/carton | | 1 lb. |
| 08MHTOCPG | Patina Green | | | | |
| 08MHTOCRB | Rock Brown | | | | |
| 08MHTOCSG | Slate Gray | | | | |
| 08MHTOCTC | Terra Cotta | | | | |
| INSIDE CORNERS | | | | | |
| 08MHTICMZ | Medium Bronze | NA | 12/carton | 1 lb. | |
| 08MHTICPG | Patina Green | | | | |
| 08MHTICRB | Rock Brown | | | | |
| 08MHTICSG | Slate Gray | | | | |
| 08MHTICTC | Terra Cotta | | | | |

| Product Code | Description | Size | Packaging | Weight |
|-------------------------|------------------|---|------------|--------|
| T-JOINT PATCHES | | | | |
| 08MHTTJPMZ | Medium Bronze | 4-1/2" Diameter | 100/carton | 1 lb. |
| 08MHTTJPPG | Patina Green | | | |
| 08MHTTJPRB | Rock Brown | | | |
| 08MHTTJPSG | Slate Gray | | | |
| 08MHTTJPTC | Terra Cotta | | | |
| SQUARE TUBE WRAP | | | | |
| 08MHTSW2MZ | 2" Medium Bronze | 2" x 2" | 8/carton | 6 lbs. |
| 08MHTSW2PG | 2" Patina Green | | | |
| 08MHTSW2RB | 2" Rock Brown | | | |
| 08MHTSW2SG | 2" Slate Gray | | | |
| 08MHTSW2TC | 2" Terra Cotta | | | |
| 08MHTSW3MZ | 3" Medium Bronze | 3" x 3" | | |
| 08MHTSW3PG | 3" Patina Green | | | |
| 08MHTSW3RB | 3" Rock Brown | | | |
| 08MHTSW3SG | 3" Slate Gray | | | |
| 08MHTSW3TC | 3" Terra Cotta | | | |
| 08MHTSW4MZ | 4" Medium Bronze | 4" x 4" | | |
| 08MHTSW4PG | 4" Patina Green | | | |
| 08MHTSW4RB | 4" Rock Brown | | | |
| 08MHTSW4SG | 4" Slate Gray | | | |
| 08MHTSW4TC | 4" Terra Cotta | | | |
| 08MHTSW5MZ | 5" Medium Bronze | 5" x 5" | | |
| 08MHTSW5PG | 5" Patina Green | | | |
| 08MHTSW5RB | 5" Rock Brown | | | |
| 08MHTSW5SG | 5" Slate Gray | | | |
| 08MHTSW5TC | 5" Terra Cotta | | | |
| 08MHTSW6MZ | 6" Medium Bronze | 6" x 6" | | |
| 08MHTSW6PG | 6" Patina Green | | | |
| 08MHTSW6RB | 6" Rock Brown | | | |
| 08MHTSW6SG | 6" Slate Gray | | | |
| 08MHTSW6TC | 6" Terra Cotta | | | |
| DROP SCUPPERS | | | | |
| 08MHTSD2MZ | 2" Medium Bronze | 1-7/8" Diameter; 7-1/2" Length | 1/carton | 2 lb. |
| 08MHTSD2PG | 2" Patina Green | | | |
| 08MHTSD2RB | 2" Rock Brown | | | |
| 08MHTSD2SG | 2" Slate Gray | | | |
| 08MHTSD2TC | 2" Terra Cotta | | | |
| 08MHTSD3MZ | 3" Medium Bronze | 2-5/8" Diameter; 7-1/2" Length | | |
| 08MHTSD3PG | 3" Patina Green | | | |
| 08MHTSD3RB | 3" Rock Brown | | | |
| 08MHTSD3SG | 3" Slate Gray | | | |
| 08MHTSD3TC | 3" Terra Cotta | | | |

| Product Code | Description | Size | Packaging | Weight |
|------------------------------|---------------------|---|-----------|--------|
| THRU WALL SCUPPERS | | | | |
| 08MHTTS3MZ | 3" Medium Bronze | 3"x3"x16" | 1/carton | 6 lbs. |
| 08MHTTS3PG | 3" Patina Green | | | |
| 08MHTTS3RB | 3" Rock Brown | | | |
| 08MHTTS3SG | 3" Slate Gray | | | |
| 08MHTTS3TC | 3" Terra Cotta | | | |
| 08MHTTS4MZ | 4" Medium Bronze | 4"x4"x16" | | |
| 08MHTTS4PG | 4" Patina Green | | | |
| 08MHTTS4RB | 4" Rock Brown | | | |
| 08MHTTS4SG | 4" Slate Gray | | | |
| 08MHTTS4TC | 4" Terra Cotta | | | |
| 08MHTTS6MZ | 6" Medium Bronze | 6"x6"x16" | | |
| 08MHTTS6PG | 6" Patina Green | | | |
| 08MHTTS6RB | 6" Rock Brown | | | |
| 08MHTTS6SG | 6" Slate Gray | | | |
| 08MHTTS6TC | 6" Terra Cotta | | | |
| BREATHER VENTS | | | | |
| 08MHTBV1MZ | 1-Way Medium Bronze | 4" Length; 8" Height | 1/carton | 2 lbs. |
| 08MHTBV1PG | 1-Way Patina Green | | | |
| 08MHTBV1RB | 1-Way Rock Brown | | | |
| 08MHTBV1SG | 1-Way Slate Gray | | | |
| 08MHTBV1TC | 1-Way Terra Cotta | | | |
| 08MHTBV2MZ | 2-Way Medium Bronze | | | |
| 08MHTBV2PG | 2-Way Patina Green | | | |
| 08MHTBV2RB | 2-Way Rock Brown | | | |
| 08MHTBV2SG | 2-Way Slate Gray | | | |
| 08MHTBV2TC | 2-Way Terra Cotta | | | |
| RVO VENT COLLAR COMBO | | | | |
| 08MHTVC1MZ | 1-Way Medium Bronze | 8-1/4" Diameter; 5-3/4" Length | 1/carton | 2 lbs. |
| 08MHTVC1PG | 1-Way Patina Green | | | |
| 08MHTVC1RB | 1-Way Rock Brown | | | |
| 08MHTVC1SG | 1-Way Slate Gray | | | |
| 08MHTVC1TC | 1-Way Terra Cotta | | | |
| 08MHTVC2MZ | 2-Way Medium Bronze | | | |
| 08MHTVC2PG | 2-Way Patina Green | | | |
| 08MHTVC2RB | 2-Way Rock Brown | | | |
| 08MHTVC2SG | 2-Way Slate Gray | | | |
| 08MHTVC2TC | 2-Way Terra Cotta | | | |

TPO Colorway product samples.



TPO ACCESSORIES



TPO CONTOUR RIB PROFILE

The Decorative Rib (TPO) is secured to a MuleHide Fully Adhered TPO roofing membrane to simulate the appearance of a standing seam metal roofing system.

TPO

| Product Code | Description | Size | Carton | Weight |
|--------------|-------------|------|--------|---------|
| 08MHTCR10W | White | 10' | 20 per | 84 lbs. |
| 08MHTCR10G | Gray | | | |
| 08MHTCR10T | Tan | | | |



TPO COATED METAL

A 24-gauge galvanized steel sheet coated with a layer of 0.035" non-reinforced TPO flashing. TPO Coated Metal is cut into the appropriate width and used to fabricate metal drip edges or other roof perimeter edging profiles. TPO membrane may be welded directly to the coated metal edging, eliminating the need to strip in the metal with a separate piece of membrane.

TPO

| Product Code | Description | Size | Carton | Weight |
|--------------|-------------|----------|----------------------|----------|
| 08MHCM481W | White | 4' x 10' | 25 pieces per pallet | 580 lbs. |
| 08MHCM481G | Gray | | | |
| 08MHCM481T | Tan | | | |

Sold in FULL PALLET QTY Only!



TPO WALKWAY ROLL

TPO Walkway Roll incorporates an aggressive, non-slip, diamond plate tread pattern of polyester reinforced TPO material that offers excellent tear and puncture resistance. Walkway Rolls are trimmed in safety yellow along the length of the sheet to better define the walkway area. The yellow edges are smooth without safety lugs to allow for easier welding.

TPO

| Product Code | Description | Roll | Coverage | Weight |
|--------------|-------------|-----------|------------|---------|
| 08MHTW345W | White | 34" x 50' | 125 sq.ft. | 97 lbs. |
| 08MHTW345G | Gray | | | |
| 08MHTW345T | Tan | | | |



YELLOW PS WARNING STRIP

Intended for use on EPDM, TPO or PVC roofing systems to provide a visual warning of an impending hazard (i.e. roof edge, deep drain sump, skylight, etc.) Beneficial when maintenance personnel are frequently on the roof. Cannot be used for flashings or as a coverstrip.

EPDM

TPO

PVC

Requires the use of Tape Primer or Low-VOC Tape Primer.

| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|-------------|--------|---------|------------|
| 08MHTSC61Y | 6" x 100' | 2 per | 41 lbs. | 1 year |



HP PROTECTIVE MAT

A nominal 6 ounce per square yard (140 grams per square meter) UV-resistant polypropylene needle-punched fabric. Can be used above the membrane as a slipsheet for crushed stone or pavers or below the membrane as a minimum underlayment mat for mechanically attached or ballasted system applications.

EPDM

TPO

PVC

| Product Code | Description | Coverage | Weight |
|--------------|-------------|--------------|----------|
| 08MHPM153 | 15' X 300' | 4,500 sq.ft. | 225 lbs. |



RUBBER PAVER BLOCKS

An environmentally friendly product that provides superior protection to the underlying membrane. Features a resilient, shock-absorbing, weather-resistant traffic surface. Pavers lock together to provide multi-directional drainage patterns eliminating the need for protective mats. Consists of 90% post-consumer recycled content.

EPDM

TPO

PVC

| Product Code | Description | Dimensions | Weight |
|--------------|-------------|----------------|---------|
| 08MHP222BK | Black | 2" x 24" x 24" | 24 lbs. |
| 08MHP222TC | Terra Cotta | | |

PVC

POLYVINYL CHLORIDE

PVC MEMBRANE (50-Mil, 60-Mil & 80-Mil) Used in mechanically attached and fully adhered roofing systems in new construction, reroofing and recover (retrofit) applications. It may also be used as flexible membrane flashings for walls, curbs, etc. when installing PVC membrane roofing systems. The system must be installed over acceptable roof insulation or other suitable substrate. See the MuleHide PVC Specifications Manual for complete specifications and details. The physical properties of the membrane are enhanced by a tenacious, weft-inserted polyester fabric. Meets or exceeds all requirements of ASTM D4434, Type III.



PVC MEMBRANE MINIMUM (60-Mil Minimum) Manufactured to a minimum 60-mil sheet thickness.

PVC KEE HP MEMBRANE (50-Mil, 60-Mil & 80-Mil) Manufactured using DuPont® Elvaloy® resin modifier and provides outstanding thermal stability and flexibility, extended upper and lower temperature performance limits and enhanced chemical resistance. The physical properties of the membrane are enhanced by a tenacious, weft-inserted polyester fabric. Meets or exceeds all requirements of ASTM D4434, Type III.

PVC FLEECE BACK MEMBRANE (45-Mil, 60-Mil, 80-Mil) Used in fully adhered and mechanically attached roofing systems in new construction, reroofing and recover (retrofit) applications.

PVC KEE HP FLEECE BACK MEMBRANE (45-Mil, 60-Mil, 80-Mil) Used in fully adhered roofing systems in new construction, reroofing and recover (retrofit) applications. The polyester fleece backing enhances the puncture-resistance of the membrane and can also serve as a built-in separation layer for rough surfaces or existing asphalt-based roofing systems.



Membrane Thickness

50-Mil

60-Mil

80-Mil



PVC ADHESIVES & SEALANTS



HYDROBOND® WATER-BASED PVC BONDING ADHESIVE

Designed to bond PVC membranes to a clean, dry, horizontal surface as a one-sided wet lay-in adhesive with slopes up to 2:12. HydroBond® can be used with both smooth back and fleece backed PVC membranes. Can also be used as a contact adhesive for vertical applications, such as flashings.

*Not approved for Standard PVC KEE HP

PVC



LOW-VOC PVC BONDING ADHESIVE

A high-strength solvent-based contact adhesive that allows bonding of PVC and KEE membranes to various porous and non-porous substrates. This product meets the <250 gpl VOC content requirements of the OTC Model Rule for Single-Ply Roofing Adhesives.

PVC

| Product Code | Description | Coverage | Shelf Life |
|--------------|---------------|---------------------------|------------|
| 08MHHBWA5 | 5-Gallon Pail | 100-133 sq.ft. per gallon | 1 year |

| Product Code | Description | Coverage | Shelf Life |
|--------------|---------------|-----------------------|------------|
| 08MHPBALV5 | 5-Gallon Pail | 60 sq. ft. per gallon | 1 year |



AQUABASE 120 BONDING ADHESIVE

A two-sided water-based bonding-adhesive used to adhere EPDM, Standard TPO, TPO Fleece Back and PVC Fleece Back membranes to approved surfaces. Can be used as a one-sided, wet lay-in adhesive with MuleHide Fleece Back membranes. Low-temperature restrictions apply.

EPDM

TPO

PVC



1168 LOW-VOC PVC BONDING ADHESIVE

A high-strength solvent-based contact adhesive that allows bonding of PVC and KEE membranes to various porous and non-porous substrates. It is specially formulated to be in compliance with rule 1168 of the South Coast Air Quality Management District (SCAQMD) in California. This product meets the <250 gpl VOC content requirements of the OTC Model Rule for Single-Ply Roofing Adhesives.

PVC

| Product Code | Description | Coverage | Shelf Life |
|--------------|---------------|---------------------------|------------|
| 08MHAB1205 | 5-Gallon Pail | 100-120 sq.ft. per gallon | 1 year |

| Product Code | Description | Coverage | Shelf Life |
|--------------|---------------|-----------------------|------------|
| 08MHPBALV5 | 5-Gallon Pail | 60 sq. ft. per gallon | 1 year |



AEROWEB PVC LOW-VOC AEROSOL CONTACT ADHESIVE

MuleHide's AeroWeb PVC is a low-VOC Aerosol Contact Adhesive that can be used for a variety of applications: adhering PVC bareback membranes to a variety of horizontal substrates and vertical walls, and adhering Fleece Back membranes to vertical surfaces. AeroWeb PVC cannot be used with any KEE bareback membranes.

PVC



THERMOPLASTIC ONE-PART POURABLE SEALER (WHITE)

Designed for use with TPO, PVC & EPDM Pourable Sealer Pockets. The sealant's one-part, pourable consistency allows for quick pocket filling without mixing.

EPDM

TPO

PVC

| Product Code | Description | Carton | Shelf Life |
|--------------|---|--------|------------|
| 08MHAWAPVC | AeroWeb LV Adhesive/Primer | 1 | 1 Year |
| 08MHCCGH6 | 6' Hose | 1 | N/A |
| 08MHCCGH12 | 12' Hose | 1 | |
| 08MHCCGH18 | 18' Hose | 1 | |
| 08MHCCGSGN | Spray Gun (for vertical) | 1 | |
| 08MHCCGSGV | Spray Gun with 24" extension (for horizontal) | 1 | |

| Product Code | Description | Weight | Coverage | Shelf Life |
|--------------|-----------------------------------|---------|------------|------------|
| 08MHTPSWHE | 1/2-Gallon Pouches (4 per carton) | 29 lbs. | 122 cu.in. | 1 year |



WATER CUT-OFF MASTIC

Used to seal roofing membranes to stop water penetration into the roofing system. Common uses are at drain terminations and behind MuleHide All Purpose Bars at wall terminations.

LOW-VOC WATER CUT-OFF MASTIC

EPDM TPO PVC

| Product Code | Description | Weight | Coverage | Shelf Life |
|--------------|-------------------------------|---------|-----------------------------|------------|
| 08MHWTRC | 11-oz Tube (25 per carton) | 27 lbs. | 10 Ln.ft. with 1/2" bead | 1 year |
| 08MHLWTRC | | | | |



UNIVERSAL SINGLE-PLY SEALANT

A 100% solids, solvent free, one-part, polyether sealant that provides a weather-tight seal to a variety of building substrates. Provides excellent adhesive to substrates such as stone, masonry, ceramic, marble, wood, steel, aluminum, most plastics and composites. Not recommended as a glass-glazing sealant.

EPDM TPO PVC

| Product Code | Description | Weight | Coverage | Shelf Life |
|--------------|---------------------------------|---------|-----------------------------|------------|
| 08MHUSPSWH | 10.1-oz Tube (24 per carton) | 24 lbs. | 25 Ln.ft. with 1/4" bead | 1 year |




LOW-VOC MEMBRANE CLEANER

Used to clean both new and in-service EPDM, TPO, PVC and PVC KEE membranes prior to the seaming process. This cleaner helps to loosen and remove dirt and other contaminants from the membrane surface and leaves a suitable surface for welding or the subsequent application of Tape Primer.

*Meets California & Utah VOC regulations

EPDM TPO PVC

| Product Code | Description | Carton | Coverage |
|--------------|--------------------------|--------|-----------------------------------|
| 08MHTLVMC1 | 1-Gallon Pail / Low-VOC* | 2 per | 400 sq.ft. (1-side) per gallon |
| 08MHTLVMC5 | 5-Gallon Pail / Low-VOC* | 1 per | |

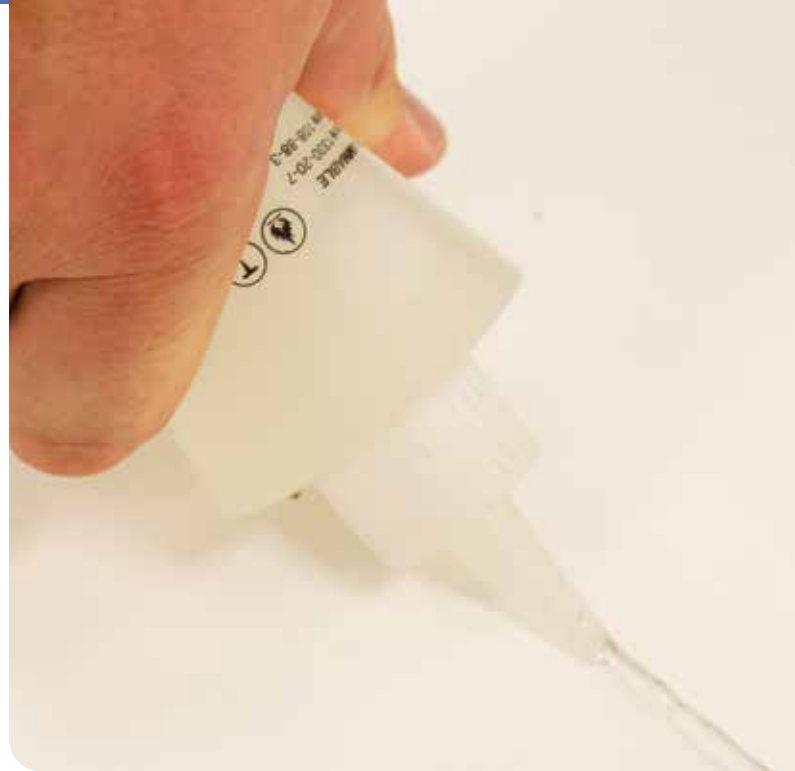

PVC CUT EDGE SEALANT

A free-flowing polymeric material designed for use at the cut edge (exposed scrim) of MuleHide PVC reinforced membrane seams after the membrane has been welded to itself or to MuleHide PVC Coated Metal.

PVC

| Product Code | Description | Coverage | Carton | Shelf Life |
|--------------|--------------|-------------------------|--------|------------|
| 08MHPESPT | 16-oz Bottle | 225-275 lf 1/8" bead | 12 per | 1 year |



PVC UN-TACK (CLEANER)

PVC Un-Tack is designed to clean spray guns and hoses used to apply AeroWeb PVC. PVC Un-Tack can also be used to remove adhesives and primers from a variety of surfaces including single-ply membranes, accessories, metal, plastic, rubber, and glass. DO NOT use PVC UN-TACK for removal of AeroWeb Adhesive/Primer.

PVC

| Product Code | Description | Carton | Shelf Life |
|--------------|---------------------|--------|------------|
| 08MHUTPVC | Low-VOC PVC Un-Tack | 1 | 1 Year |

PVC FLASHING



PVC PIPE SEALS

An injection molded, pre-formed flashing for single pipe penetrations made of MuleHide non-reinforced PVC material. Designed to add ease to the installation process while offering increased watertight security and improved aesthetics.

PVC

| Product Code | Description | Size | Carton | Weight |
|--------------|-------------|---------------|--------|--------|
| 08MHPP348W | White | 3/4" to 8" OD | 8 per | 8 lbs. |
| 08MHPP348G | Gray | | | |
| 08MHPP348T | Tan | | | |



PVC CONTOUR RIB PROFILE

The Decorative Rib (PVC) is secured to a MuleHide Fully Adhered PVC roofing membrane to simulate the appearance of a standing seam metal roofing system.

PVC

| Product Code | Description | Size | Carton | Weight |
|--------------|-------------|------|--------|---------|
| 08MHPCR10W | White | 10' | 20 per | 84 lbs. |
| 08MHPCR10G | Gray | | | |
| 08MHPCR10T | Tan | | | |



YELLOW PS WARNING STRIP

Intended for use on EPDM, TPO or PVC roofing systems to provide a visual warning of an impending hazard (i.e. roof edge, deep drain sump, skylight, etc.) Beneficial when maintenance personnel are frequently on the roof. Cannot be used for flashings or as a coverstrip.

EPDM

TPO

PVC

Requires the use of Tape Primer or Low-VOC Tape Primer.

| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|-------------|--------|---------|------------|
| 08MHTSC61Y | 6" x 100' | 2 per | 41 lbs. | 1 year |



PVC SPLIT PIPE SEAL

Contains a split (cut) and overlap tab that allows the pipe-boot to be opened and wrapped around a round pipe with an obstruction. Such obstructions prevent the use of a standard pre-molded pipe boot. Made of 60-mil reinforced PVC membrane for pipes 1" to 6" in diameter.

PVC

| Product Code | Description | Description | Carton |
|--------------|-------------|-------------|-----------|
| 08MHPPSR1W | 1" Pipe | White | 8 per box |
| 08MHPPSR2W | 2" Pipe | | |
| 08MHPPSR3W | 3" pipe | | |
| 08MHPPSR4W | 4" Pipe | | |
| 08MHPPSR5W | 5" Pipe | | |
| 08MHPPSR6W | 6" Pipe | | |
| 08MHPPSR1G | 1" Pipe | Gray | |
| 08MHPPSR2G | 2" Pipe | | |
| 08MHPPSR3G | 3" pipe | | |
| 08MHPPSR4G | 4" Pipe | | |
| 08MHPPSR5G | 5" Pipe | | |
| 08MHPPSR6G | 6" Pipe | | |
| 08MHPPSR1T | 1" Pipe | Tan | |
| 08MHPPSR2T | 2" Pipe | | |
| 08MHPPSR3T | 3" pipe | | |
| 08MHPPSR4T | 4" Pipe | | |
| 08MHPPSR5T | 5" Pipe | | |
| 08MHPPSR6T | 6" Pipe | | |



PVC NON-REINFORCED FLASHING

Used for sealing joints of MuleHide PVC Coated Metal, drain details, field flashing pipes and other details where reinforced membrane or the use of pre-molded accessories are not feasible.

PVC

| Product Code | Description | Size | Carton | Weight |
|--------------|-------------|-----------|--------|---------|
| 08MHPF1250 | White/Gray | 12" x 50' | 1 per | 31 lbs. |
| 08MHPF2450 | White/Gray | 24" x 50' | | 56 lbs. |
| 08MHPF125T | White/Tan | 12" x 50' | | 33 lbs. |
| 08MHPF245T | White/Tan | 24" x 50' | | 66 lbs. |



INSIDE CORNERS

MuleHide PVC Inside Corners are uniform in shape and size and provide water tightness at inside corners formed by PVC coated metal and/or PVC flashing membrane. Provides a neat, finished look to building corners, curbs and parapet flashings with no cutting required.

PVC

| Product Code | Description | Carton | Weight |
|--------------|-------------|--------|--------|
| 08MHPICW | White | 12 per | 1 lbs. |
| 08MHPICG | Gray/Tan | | |



T-JOINT COVER

Used to seal step-offs at splice intersections. Installation is mandatory on all 60-mil and 80-mil PVC systems and on 45-mil systems where step-offs have not been properly sealed.

PVC

| Product Code | Description | Size | Carton | Weight |
|--------------|-------------|-------------|---------|--------|
| 08MHPTJPWH | White | 4.5" circle | 100 per | 4 lbs. |
| 08MHPTJPGY | Gray | | | |
| 08MHPTJPTN | Tan | | | |



PVC / PVC KEE HP COVER STRIP

Non-reinforced thermoplastic polyvinyl chloride-based membrane used for stripping in PVC or PVC KEE HP coated metal roof edging.

PVC

| Product Code | Description | Size | Carton | Weight |
|--------------|--------------------|---------|--------|--------|
| 08MHPCS87W | .080 White PVC | 8"x75' | 1 per | 28 |
| 08MHPCS87G | .080 Gray PVC | | | 24 |
| 08MHPCS87T | .080 Tan PVC | | | 24 |
| 08MHPKC81W | .060 White PVC KEE | 8"x100' | 2 per | 56 |
| 08MHPKC87W | .080 White PVC KEE | 8"x75' | 1 per | 26 |
| 08MHPKC87G | .080 Gray PVC KEE | | | 28 |
| 08MHPKC87T | .080 Tan PVC KEE | | | 24 |



OUTSIDE CORNERS

Uniform in shape and size and provide water-tightness at outside corners formed by PVC coated metal and/or PVC flashing membrane. Provides a neat, finished look to building corners, curbs and parapet flashings with no cutting required.

PVC

| Product Code | Description | Carton | Weight |
|--------------|-------------|--------|--------|
| 08MHPOCW | White/Gray | 12 per | 1 lbs. |
| 08MHPOCG | Gray/Tan | | |



PVC PS COVER STRIP

A nominal 35-mil non-reinforced KEE HP flashing laminated to a nominal 35-mil, fully cured, pressure-sensitive, synthetic rubber adhesive. Used to strip in flat metal edgings (e.g. drip edge).

LOW-VOC PVC STEP 1 ACTIVATOR & STEP 2 PRIMER

This version meets requirements of California Rule 1168.

PVC

| Product Code | Description | Carton | Weight |
|--------------|------------------------------|--------|---------|
| 08MHPPS61W | White | 2 per | 44 lbs. |
| 08MHPPS61G | Gray | | |
| 08MHPPS61T | Tan | | |
| 08MHPLVAC1 | Low-VOC PVC Step 1 Activator | 2 per | 16 lbs. |
| 08MHPLVPC1 | Low-VOC PVC Step 2 Primer | 2 per | 19 lbs. |
| 08MHPPRIM1 | PVC Step 2 Primer | 2 per | 13 lbs. |

PVC FLASHING




UNIVERSAL CORNERS

Uniform in shape and size and provide water-tightness at corners formed by PVC coated metal and/or PVC flashing membrane. Provides a neat, finished look to building corners, curbs and parapet flashings with no cutting or stretching required.

PVC

| Product Code | Description | Carton | Weight |
|--------------|-------------|--------|--------|
| 08MHPVCI0 | White | 20 per | 5 lbs. |



THROUGH WALL SCUPPER

The prefabricated membrane-coated scupper insert detail with heat-welded seams is a superior detail to the galvanized scupper sleeve and bonding adhesive alternative.

PVC

| Product Code | Description | Clad Metal Through Wall Box | | |
|--------------|-------------------------------------|-----------------------------|----|----|
| | | L | H | W |
| 08MHPSC4W | PVC 4" Through Wall Scupper - White | 16" | 4" | 4" |
| 08MHPSC4G | PVC 4" Through Wall Scupper - Gray | | | |
| 08MHPSC4T | PVC 4" Through Wall Scupper - Tan | | | |
| 08MHPSC6W | PVC 6" Through Wall Scupper - White | 16" | 6" | 6" |
| 08MHPSC6G | PVC 6" Through Wall Scupper - Gray | | | |
| 08MHPSC6T | PVC 6" Through Wall Scupper - Tan | | | |



PVC MOLDED SEALANT POCKETS

Interlocking, two-piece prefabricated pockets of non-reinforced PVC material used to seal pipe clusters or other irregular shaped penetrations. Pockets length can be adjusted from 7-1/2" to 11-1/2" by following the pre-molded cutting lines.

PVC

| Product Code | Description | Size | Carton | Weight |
|--------------|-------------|-------------------|--------|--------|
| 08MHPMSAPW | White | 7-1/2" to 11-1/2" | 5 per | 5 lbs. |



VENT COLLAR COMBO

Prefabricated flashing for hot stacks, dryer vents or static attic vents that come complete with painted metal sleeve and vent caps. Large target base patch allows for quick installation by simply screwing the metal sleeve to the deck and then welding the target base to the field membrane.

PVC

*Cannot be used on warranted projects.
For residential use only.*

| Product Code | Description | Diameter | Height | Spacing |
|--------------|-------------------------------|----------|--------|-------------------|
| 08MHPRVOCW | PVC Vent Collar Combo - White | 8-1/4" | 5-3/4" | 1 per 1,500 sq ft |
| 08MHPRVOCG | PVC Vent Collar Combo - Gray | | | |
| 08MHPRVOCT | PVC Vent Collar Combo - Tan | | | |



DROP SCUPPER

The prefabricated drop tube scupper with heat-welded seams is an excellent alternative and solution for a through roof soffit drain and downspout tie in. With an easy heat-weld flange for quick and watertight application.

PVC

*Cannot be used on warranted projects.
For residential use only.*

| Product Code | Description | Dia. | Length |
|--------------|-----------------------------|--------|--------|
| 08MHPSCD2W | PVC 2" Drop Scupper - White | 1-7/8" | 7-1/2" |
| 08MHPSCD2T | PVC 2" Drop Scupper - Tan | 1-7/8" | |
| 08MHPSCD2G | PVC 2" Drop Scupper - Gray | 1-7/8" | |
| 08MHPSCD3W | PVC 3" Drop Scupper - White | 2-5/8" | |
| 08MHPSCD3T | PVC 3" Drop Scupper - Tan | 2-5/8" | |
| 08MHPSCD3G | PVC 3" Drop Scupper - Gray | 2-5/8" | |



BREATHER VENTS

Prefabricated two-way, or static, vents allow proper ventilation of attic spaces below PVC membranes. The reinforced membrane flange allows for quick installation by centering vent over opening and welding to the field membrane.

PVC

| Product Code | Description | Dia. | Length | Net Free Area | Spacing |
|--------------|---------------------------------|------|--------|---------------|-------------------|
| 08MHPBV1W | PVC 1-Way Breather Vent - White | 4" | 8" | N/A | 1 per 1,000 sq ft |
| 08MHPBV1G | PVC 1-Way Breather Vent - Gray | | | | |
| 08MHPBV1T | PVC 1-Way Breather Vent - Tan | | | | |
| 08MHPBV2W | PVC 2-Way Breather Vent - White | | | 12-sq.in. | |
| 08MHPBV2G | PVC 2-Way Breather Vent - Gray | | | | |
| 08MHPBV2T | PVC 2-Way Breather Vent - Tan | | | | |




PVC COATED METAL

A 24-gauge galvanized steel sheet coated with a layer of 0.035" non-reinforced PVC flashing. PVC Coated Metal is cut into the appropriate width and used to fabricate metal drip edges or other roof perimeter edging profiles. PVC membrane may be welded directly to the coated metal edging, eliminating the need to strip in the metal with a separate piece of membrane.

PVC

| Product Code | Description | Size | Carton | Weight |
|--------------|-------------|------------|----------------------|----------|
| 08MHPVC41W | White | 48" x 120" | 25 pieces per pallet | 520 lbs. |
| 08MHPVC41G | Gray | | | |
| 08MHPVC41T | Tan | | | |

Sold in FULL PALLET QTY Only!



PVC WALKWAY ROLL

PVC Walkway Roll incorporates an aggressive, non-slip, tread pattern of polyester reinforced PVC material that offers excellent tear and puncture resistance.

PVC

| Product Code | Description | Size | Coverage | Weight |
|--------------|-------------|-----------|------------|---------|
| 08MHMH100 | Gray | 36" x 60' | 180 sq.ft. | 97 lbs. |



HP PROTECTIVE MAT

A nominal 6 ounce per square yard (140 grams per square meter) UV-resistant polypropylene needle-punched fabric. Can be used above the membrane as a slipsheet for pavers or below the membrane as a minimum underlayment mat for mechanically attached systems.

EPDM

TPO

PVC

| Product Code | Description | Coverage | Weight |
|--------------|-------------|--------------|----------|
| 08MHPM153 | 15' X 300' | 4,500 sq.ft. | 225 lbs. |



RUBBER PAVER BLOCKS

An environmentally friendly product that provides superior protection to the underlying membrane. Features a resilient, shock-absorbing, weather-resistant traffic surface. Pavers lock together to provide multi-directional drainage patterns eliminating the need for protective mats. Consists of 90% post-consumer recycled content.

EPDM

TPO

PVC

| Product Code | Description | Dimensions | Weight |
|--------------|-------------|----------------|---------|
| 08MHP222BK | Black | 2" x 24" x 24" | 24 lbs. |
| 08MHP222TC | Terra Cotta | | |

Mod Bit

APP TORCH PREMIER MEMBRANES

APP TORCH G PREMIER (4.5 mm, 100 ft² coverage per roll) Premium, polyester reinforced APP modified bitumen roofing membranes specially designed for heat-welded (torch) applications. Constructed with premium atactic polypropylene resins and incorporating superior polyester reinforcing, APP Torch G provides an exceptionally durable roofing product which is easy to install and will provide long-term weathering. APP Torch G has a granulated surface that is available in several colors and has a polyolefin backing. Exceeds all minimum ASTM standards for tensile strength, puncture-resistance and flexibility. Meets ASTM D6222 Type 1 requirements. Also available in FR.

APP TORCH S PREMIER (4 mm, 100 ft² coverage per roll) Premium, polyester reinforced APP modified bitumen roofing membranes specially designed for heat-welded (torch) applications. Constructed with premium atactic polypropylene resins and incorporating superior polyester reinforcing, APP Torch S provides an exceptionally durable roofing product which is easy to install and will provide long-term weathering with a smooth surface and a polyolefin backing. Torch APP S exceeds all minimum ASTM standards for tensile strength, puncture-resistance and flexibility. Meets ASTM D6222 Type 1 requirements. Also available in FR.

APP TORCH BASE PREMIER (2 mm, 200 ft² coverage per roll) APP modified bitumen roofing membrane base sheet, reinforced with a fiberglass mat, saturated and coated with a polymerized asphaltic compound, and has exceptional waterproofing and weatherability characteristics. Top and bottom surfaces are finished with a poly film. Meets ASTM D6509 Type 1 requirements.

G2 BASE (50-Mil, 315 ft² coverage per roll) A fiberglass mat coated with an oxidized asphalt blend, which provides enhanced weathering and aging characteristics. G2 Base is designed as a base sheet for built-up and modified roofing applications. Provides great tear and pull through resistance. Meets or exceeds ASTM D4601.

NAIL BASE (2 mm, 200 ft² coverage per roll) Premium polyester reinforced, fire retardant modified bitumen membrane manufactured to meet the toughest industry and code requirements. Manufactured with a styrene butadiene styrene (SBS) modified asphalt compound that exhibits exceptional waterproofing and weathering properties. Finished with a polyolefin film with printed lay lines on the top surface. Meets ASTM D6163 Type 1, Grade S.



Mod Bit

SELF-ADHERING MEMBRANES

SA-SBS CAP SHEET (3.3 mm, 100 ft² coverage per roll) A premium polyester-reinforced modified bitumen membrane manufactured to meet the toughest industry and code requirements. Manufactured with advanced dual-compound technology, whereby the membrane consists of a styrene butadiene styrene (SBS) modified asphalt compound on top and a pressure-sensitive adhesive compound on the bottom. The adhesive is covered with a split release liner. Finished with granules on the top surface, except for the selvedge edge and end lap, which are granule free. Also used as a flashing membrane in all applicable specifications. Meets ASTM D6164 Type 1, Grade G (granular) / ASTM D1970. Also available in FR.

SA-APP CAP SHEET (3.3 mm, 100 ft² coverage per roll) Premium polyester-reinforced modified bitumen membrane manufactured to meet the toughest industry and code requirements. Manufactured with advanced dual-compound technology, whereby the membrane consists of an atactic polypropylene (APP) modified asphalt compound on top and a pressure-sensitive adhesive compound on the bottom. The adhesive is covered with a split release liner. Finished with granules on the top surface, except for the selvedge edge and end lap, which are granular free. Also used as a flashing membrane in all applicable specifications. Meets ASTM D6222 Type 1, Grade G (granular) / ASTM D1970. Also available in FR.

SA BASE SHEET (2 mm, 200 ft² coverage per roll) A premium polyester-reinforced, fire retardant modified bitumen membrane manufactured to meet the toughest industry and code requirements. Manufactured with advanced dual-compound technology, whereby the membrane consists of a styrene butadiene styrene (SBS) modified asphalt compound on top and a pressure-sensitive adhesive compound on the bottom. The adhesive is covered with a split release liner. Finished with a polyolefin film with printed lay lines on the top surface. Meets ASTM D6163 Type 1, Grade S (smooth) / ASTM D1970. Also available in FR.

In order to perform properly, MuleHide Self-Adhering membranes require a minimum application temperature of 40°F and rising for 48 continuous hours.



MODIFIED BITUMEN MEMBRANES

CAP SHEET COLOR SELECTION:



White



Black



Weatherwood



Buff



Chestnut



Oak




Heather Blend



Gray Slate



Pine Green



Red Blend



KoolCap®

| Product Name | Description | Coverage | Weight | Carton |
|---------------------------------|---|---------------------|----------|------------|
| BASE SHEETS | | | | |
| SA Base Sheet | Self-Adhesive SBS Base Sheet Inter-Ply with Polyolefin Film Surface Glass Fiber Mat ASTM D6163 Type I, Grade S / D1970 | 200 ft ² | 95 lbs. | 2 Sq. Roll |
| SA Base Sheet FR | Self-Adhesive SBS Fire-Retardant Base Sheet Inter-Ply with Polyolefin Film Surface Glass Fiber Mat ASTM D6163 Type I, Grade S / D1970 | 200 ft ² | 94 lbs. | 2 Sq. Roll |
| Nail Base | SBS Base Sheet Polyfilm Top Sand Bottom Glass Fiber Mat ASTM D6163 Type I | 200 ft ² | 106 lbs. | 2 Sq. Roll |
| APP Torch Base Premier | Fiberglass Mat Saturated and Coated with a Polymerized Asphalt Compound ASTM D6509 Type I | 200 ft ² | 90 lbs. | 2 Sq. Roll |
| APP Torch Base/Cap S | Polyester Reinforcing Constructed with Premium Atactic Polypropylene Resins ASTM D6222 Type I | 200 ft ² | 90 lbs. | 2 Sq. Roll |
| G2 Base | Fiberglass Mat Coated with Oxidized Asphalt ASTM D4601 Type II | 300 ft ² | 82 lbs. | 3 Sq. Roll |
| TORCH CAP SHEETS | | | | |
| APP Torch G Premier | ASTM D6222 Type I | 100 ft ² | 110 lbs. | 1 Sq. Roll |
| APP Torch G FR Premier | ASTM D6222 Type I, Grade G | 100 ft | 110 lbs. | 1 Sq. Roll |
| APP Torch S Premier | APP Non-Granular (Smooth) Surface ASTM D6222 Type I, Grade S | 100 ft ² | 89 lbs. | 1 Sq. Roll |
| App Torch G KoolCap® | ASTM D6222 Type I, Grade G | 100 ft ² | 110 lbs. | 1 Sq. Roll |
| APP Torch G FR KoolCap® | ASTM D6222 Type I, Grade G | 100 ft ² | 117 lbs. | 1 Sq. Roll |
| APP Torch G | APP Granular Surface Non-Woven Polyester Mat ASTM D6222 Type I | 100 ft ² | 100 lbs. | 1 Sq. Roll |
| SELF-ADHERING CAP SHEETS | | | | |
| SA-APP Cap Sheet | APP Granular Surface Non-Woven Polyester Mat ASTM D6222 Type I, Grade G / D1970 | 100ft ² | 89 lbs. | 1 Sq. Roll |
| SA-APP Cap Sheet FR | APP Fire-Retardant Granular Surface Non-Woven Polyester Mat ASTM D6222 Type I, Grade G / D1970 | 100 ft ² | 89 lbs. | 1 Sq. Roll |
| SA-SBS Cap Sheet | SBS Granular Surface Non-Woven Fiberglass Mat ASTM D6164 Type I, Grade G / D1970 | 100 ft ² | 84 lbs. | 1 Sq. Roll |
| SA-SBS Cap Sheet FR | SBS Fire-Retardant Granular Surface Non-Woven Fiberglass Mat ASTM D6164 Type I, Grade G / D1970 | 100 ft ² | 84 lbs. | 1 Sq. Roll |
| SA-APP KoolCap® | APP Non-Woven Polyester Mat ASTM D6222 Type I | 100 ft ² | 90 lbs. | 1 Sq. Roll |
| SA-APP KoolCap® FR | APP Fire-Retardant Non-Woven Polyester Mat ASTM D6222 Type I | 100 ft ² | 90 lbs. | 1 Sq. Roll |

MODIFIED BITUMEN ADHESIVES & SEALANTS



KOOLCAP® TOUCH UP

KoolCap® Touch Up is a highly-reflective coating specially designed for use with our KoolCap® G membranes. It is bright white in color and is designed to help extend the life and enhance the performance of KoolCap® roofing system. KoolCap® Touch Up is a water-based product and environmentally friendly.

Mod Bit

| Product Code | Description | Coverage | Shelf Life |
|--------------|------------------|---------------------|------------|
| 09MHKCTU1 | KoolCap Touch Up | 500 sq. ft. per can | 1.5 years |



MOD BIT GRANULES

High-quality mineral granules used on mineral-surfaced membrane products. Tough, dense, ceramic-coated particles are weather and UV resistant. Composed of a granite-like mineral permanently coated with various pigments to match MuleHide Mod Bit Cap Sheet products.

| Product Code | Granule Colors | Description |
|--------------|-----------------------|---------------|
| 09MHGRWH | White | 5-Gallon Pail |
| 09MHGRBK | Black | |
| 09MHGRWW | Weatherwood | |
| 09MHGRBU | Buff | |
| 09MHGRCH | Chestnut | |
| 09MHGROA | Oak | |
| 09MHGRHB | Heather Blend | |
| 09MHGRSL | Gray Slate | |
| 09MHGRPG | Pine Green | |
| 09MHGRRB | Red Blend | |
| 09MHGRGR | Green (Special Order) | |
| 09MHGRRD | Red (Special Order) | |



121 ASPHALT PRIMER

A general-purpose penetrating asphalt primer used to promote adhesion prior to the application of hot-mopped, cold-applied and self-adhesive membrane systems, as well as roof cements, mastics and asphalt-based adhesives.

*Miami Dade County Approved.
Meets ASTM D41.*

| Product Code | Description | Coverage | Shelf Life |
|--------------|-----------------------|-------------------|------------|
| 16MH12114 | 14 oz can (30/carton) | 30 sq.ft. per can | 2 years |
| 16MH1215 | 5-Gallon Pail | 1-Gallon per | |
| 16MH12150 | 50-Gallon Drum | 100 sq. ft. | |



420 MOD BIT ADHESIVE - BRUSH GRADE

A brush-grade select formulation for use as a cold-applied bonding agent for SBS modified bitumen base sheets and SBS modified bitumen cap sheets.

*Miami Dade County Approved.
Meets ASTM D3019.*

Mod Bit

| Product Code | Description | Coverage | Shelf Life |
|--------------|----------------------|----------------------|------------|
| 16MH4205 | 5-Gallon Brush Grade | 1-1.5-Gallon per sq. | 18 Months |



421 MOD BIT ADHESIVE - TROWEL GRADE

A high-quality trowel-grade formulation for use as a cold-applied bonding agent for SBS modified bitumen roof systems. Heavy, trowel-grade consistency makes this product ideal for flashing details, attachment of membrane to steep slopes and parapet walls and a variety of waterproofing repairs, especially at moving joints where its flexibility and elasticity make it superior to standard plastic cements. In addition, the formulation is non-destructive to asphalt-based roofing membranes.

Mod Bit

*Miami Dade County Approved.
Meets ASTM D4586, D3409.*

| Product Code | Description | Coverage | Shelf Life |
|--------------|-----------------------|------------------|------------|
| 16MH4213 | 3-Gallon Trowel Grade | 8-Gallon per sq. | 2 years |
| 16MH4215 | 5-Gallon Trowel Grade | | |



SA VERTICAL BOND CONTACT ADHESIVE

A low-VOC, quick-drying, solvent-based, high-tack contact adhesive that is specifically formulated to promote maximum adhesion of self-adhered membranes for applications in which adhesion is more challenging.

Mod Bit

| Product Code | Description | Coverage | Shelf Life |
|--------------|---------------|---------------------------|------------|
| 08MHSAVB5 | 5-Gallon Pail | 250-425 ft² per US Gallon | 24 Months |

MULTI-SYSTEM ACCESSORIES - FASTENERS/PLATES/BARS



EHD FASTENERS

EHD Fastener (#15) is engineered for lap attachment to corrugated steel (18 – 22 ga.) and wood substrates in higher wind uplift roof assemblies. Featuring a #2 double flute self-drilling point and exclusive tapered entry thread design, penetrating steel quickly and offering exceptional back-out resistance.

| Product Code | Size | Carton | Weight |
|--------------|--------|--------|-----------|
| 08MHXH114 | 1-1/4" | 1000 | 14.4 lbs. |
| 08MHXH2 | 2" | 1000 | 21.3 lbs. |
| 08MHXH3 | 3" | 1000 | 28.6 lbs. |
| 08MHXH4 | 4" | 1000 | 37.7 lbs. |
| 08MHXH5 | 5" | 1000 | 46.4 lbs. |
| 08MHXH6 | 6" | 500 | 28.2 lbs. |
| 08MHXH7 | 7" | 500 | 32.7 lbs. |
| 08MHXH8 | 8" | 500 | 38.1 lbs. |
| 08MHXH92 | 9" | 250 | 43.2 lbs. |
| 08MHXH102 | 10" | 250 | 23.2 lbs. |
| 08MHXH112 | 11" | 250 | 25.3 lbs. |
| 08MHXH122 | 12" | 250 | 28.6 lbs. |
| 08MHXH14 | 14" | 250 | 33.2 lbs. |
| 08MHXH16 | 16" | 250 | 37.9 lbs. |
| 08MHXH18 | 18" | 250 | 42.5 lbs. |
| 08MHXH20 | 20" | 250 | 46.7 lbs. |
| 08MHXH22 | 22" | 250 | 51.7 lbs. |
| 08MHXH24 | 24" | 250 | 56.4 lbs. |



ALL PURPOSE BAR

All Purpose Bar is designed for use as an anchor bar for attachment of MuleHide EPDM membranes. May be installed in the field seam as a batten bar and used at the base of curbs, parapet walls and angle changes as an anchor bar. It can also be used with any MuleHide single-ply membranes as a termination bar. Refer to the MuleHide Single-Ply Manuals for specific use and installation instructions.

| Product Code | Description | Size/ Carton | Weight |
|--------------|---------------------------------|------------------------------|---------|
| 08MHAP10 | ALL PURPOSE BAR | 10 LF per piece 50 / tube | 49 lbs. |
| 08MHTB75 | TB-75 TERMINATION BAR | 10 LF per piece 50 / tube | |
| 08MHTB90 | TB-90 TERMINATION BAR | 10 LF per piece 50 / tube | |
| 08MHTB125 | TB-125 TERMINATION BAR | 10 LF per piece 50 / tube | |
| 08MHRD100 | RD-100 RETAINING DRAINBAR | 10 LF per piece 10 / tube | 42 lbs. |



HDP FASTENERS

HDP Fastener (#14) is engineered to secure insulation, coverboards, base sheets and single-ply roof membrane systems to corrugated steel (16 - 22 ga.), wood, and concrete substrates. Featuring a #2 double flute self-drilling point and exclusive tapered entry thread design, penetrating steel quickly and offering exceptional back-out resistance.

| Product Code | Size | Carton | Weight |
|--------------|--------|--------|-----------|
| 08MHHD112 | 1-1/2" | 1000 | 12.9 lbs. |
| 08MHHD2 | 2" | 1000 | 15.5 lbs. |
| 08MHHD212 | 2-1/2" | 1000 | 19.4 lbs. |
| 08MHHD3 | 3" | 1000 | 23.7 lbs. |
| 08MHHD312 | 3-1/2" | 1000 | 28.7 lbs. |
| 08MHHD4 | 4" | 1000 | 30.9 lbs. |
| 08MHHD412 | 4-1/2" | 1000 | 33.6 lbs. |
| 08MHHD5 | 5" | 1000 | 37.3 lbs. |
| 08MHHD512 | 5-1/2" | 1000 | 40.8 lbs. |
| 08MHHD6 | 6" | 1000 | 44 lbs. |
| 08MHHD7 | 7" | 500 | 25.9 lbs. |
| 08MHHD8 | 8" | 500 | 29.7 lbs. |
| 08MHHD925 | 9" | 250 | 32.9 lbs. |
| 08MHHD1025 | 10" | 250 | 36.7 lbs. |
| 08MHHD1125 | 11" | 250 | 41.4 lbs. |
| 08MHHD1225 | 12" | 250 | 43.5 lbs. |



DRILL POINT FASTENERS

Drill Point Fasteners (#12) are specifically engineered to secure insulation, coverboards and base sheets to corrugated steel (16 – 22 ga.) and wood substrates. Featuring a #2 double flute self-drilling point and exclusive tapered entry thread design, penetrating steel quickly and offering exceptional back-out resistance. Available with #3 Phillips Head.

| Product Code | Size | Carton | Weight |
|--------------|--------|--------|-----------|
| 08MHDP158 | 1-5/8" | 1000 | 11.8 lbs. |
| 08MHDP214 | 2-1/4" | 1000 | 16.2 lbs. |
| 08MHDP3 | 3" | 1000 | 21 lbs. |
| 08MHDP44 | 4" | 1000 | 26 lbs. |
| 08MHDP5 | 5" | 1000 | 31.5 lbs. |
| 08MHDP6 | 6" | 1000 | 37.1 lbs. |
| 08MHDP75 | 7" | 500 | 20.9 lbs. |
| 08MHDP85 | 8" | 500 | 23.9 lbs. |



TL FASTENER

TL Fastener is designed to mechanically attach rigid insulation board and single-ply membrane to structural cement wood fiber, gypsum and lightweight insulating concrete roof decks. Features a high-thread profile with a tapered root diameter and sharp point. Its unique design allows it to penetrate the roof deck and progressively compact the base material, creating a stronger hold in weak material. Used in conjunction with the 2" TL Seam Plate and 3" TL Insulation Plate.

| Product Code | Size | Carton | Weight |
|--------------|--------|--------|---------|
| 08MHTL2 | 2" | 500 | 12 lbs. |
| 08MHTL212 | 2-1/2" | 500 | 13 lbs. |
| 08MHTL3 | 3" | 500 | 15 lbs. |
| 08MHTL312 | 3-1/2" | 500 | 16 lbs. |
| 08MHTL4 | 4" | 500 | 19 lbs. |
| 08MHTL412 | 4-1/2" | 500 | 21 lbs. |
| 08MHTL5 | 5" | 500 | 23 lbs. |
| 08MHTL512 | 5-1/2" | 500 | 25 lbs. |
| 08MHTL6 | 6" | 500 | 26 lbs. |
| 08MHTL612 | 6-1/2" | 500 | 28 lbs. |
| 08MHTL7 | 7" | 250 | 15 lbs. |
| 08MHTL8 | 8" | 250 | 17 lbs. |
| 08MHTL9 | 9" | 250 | 20 lbs. |
| 08MHTL10 | 10" | 250 | 22 lbs. |

TL Plates

| Product Code | Size | Carton | Weight |
|--------------|---------------|--------|---------|
| 08MHTLP3 | 3" INSULATION | 500 | 14 lbs. |
| 08MHTLP2 | 2" SEAM | 1000 | 17 lbs. |



PFC PURLIN DRILL POINT

PFC Purlin Drill Point (#12) is a self-drilling fastener engineered to secure single-ply roofing membrane to structural steel purlins (16 ga. to 3/16") in standing seam metal roof recover applications. The specially designed 3/4" long pilot point prevents the existing metal roof panel from jacking up the threads during the drilling operation, thereby reducing point burnout and breakage.

| Product Code | Size | Carton | Weight |
|--------------|--------|--------|-----------|
| 08MHPUP138 | 1-3/8" | 2500 | 27.8 lbs. |
| 08MHPUP234 | 2-3/4" | 1000 | 20.4 lbs. |
| 08MHPUP334 | 3-3/4" | 1000 | 27.4 lbs. |
| 08MHPUP434 | 4-3/4" | 1000 | 36.5 lbs. |
| 08MHPUP534 | 5-3/4" | 1000 | 41.8 lbs. |
| 08MHPUP634 | 6-3/4" | 1000 | 49.3 lbs. |
| 08MHPUP734 | 7-3/4" | 500 | 28.1 lbs. |
| 08MHPUP834 | 8-3/4" | 500 | 31.7 lbs. |



2.4" SEAM PLATE

A round Galvalume-coated metal plate with (14) barbed anchors and reinforcing ribs for superior wind uplift resistance. Designed for the mechanical attachment of the MuleHide Reinforced EPDM, PVC and TPO membranes. The 2.4" Seam Plates can also be used with MuleHide HDP Fasteners, EHD Fasteners, reinforced 6" wide RMS or 6" wide and 10" wide RUSS™ Strip.



| Product Code | Size | Carton | Weight |
|--------------|-----------------|--------|---------|
| 08MHBS241 | 2.4" SEAM PLATE | 1000 | 52 lbs. |

3" INSULATION PLATE

3" Insulation Plates are round Galvalume-coated metal plates with reinforcing ribs for superior wind uplift resistance. Designed specifically for the mechanical attachment of MuleHide Poly ISO insulation boards and other FM Approved insulation/cover boards.



| Product Code | Size | Carton | Weight |
|--------------|---------------|--------|---------|
| 08MHGLV3 | 3" INSULATION | 1000 | 34 lbs. |

DEEP THREAD LWG FASTENER

LWG Fasteners are engineered to secure insulation, cover boards and base sheets to lightweight insulating concrete (LWIC) and gypsum decks. The LWG Fastener features an exclusive thread design engineered for exceptional pullout. When used in conjunction with the LWG 3" Metal Plate, multiple fasteners can be installed to achieve the required minimum pullout.

| Product Code | Size | Carton | Weight |
|--------------|--------|--------|---------|
| 08MHLWG214 | 2-1/4" | 1000 | 19 lbs. |
| 08MHLWG314 | 3-1/4" | 1000 | 20 lbs. |
| 08MHLWG414 | 4-1/4" | 1000 | 33 lbs. |

LWG Plate

| Product Code | Size | Carton | Weight |
|--------------|------|--------|---------|
| 08MHLWGPL3 | 3" | 1000 | 34 lbs. |



MULTI-SYSTEM ACCESSORIES - FASTENERS/PLATES/BARS



PRE-ASSEMBLED FASTENER SYSTEM


Pre-Assembled Fastener System offers a simple, economical and ergonomic "system solution" to increase the productivity in the mechanical attachment of roof insulation boards. The system includes a pre-assembled Drill Point Fastener (#12) with Phillips head style and 3" Galvalume Plate or a Drill Point Fastener (#12) and 3" Recessed Galvalume Plate, a Magnetic Setter Tool, 29" Stand-up Electric Power tool and a Canvas Fastener Bag.

| Product Code | Size | Carton | Weight |
|--------------|--------|--------|---------|
| 08MHPAD158 | 1-5/8" | 250 | 16 lbs. |
| 08MHPAD214 | 2-1/4" | 250 | 17 lbs. |
| 08MHPAD3 | 3" | 250 | 17 lbs. |
| 08MHPAD4 | 4" | 250 | 18 lbs. |
| 08MHPAD5 | 5" | 250 | 22 lbs. |
| 08MHPAD6 | 6" | 250 | 23 lbs. |
| 08MHPAD7 | 7" | 200 | 15 lbs. |
| 08MHPAD8 | 8" | 200 | 17 lbs. |

STAINLESS STEEL TERMINATION BARS

All Purpose Bar is designed for use as an anchor bar for attachment of MuleHide EPDM membranes. May be installed in the field seam as a batten bar and used at the base of curbs, parapet walls and angle changes as an anchor bar. Also be used with any MuleHide single-ply membranes as a termination bar. Refer to the MuleHide Single-Ply Manuals for specific use and installation instructions.

| Product Code | Description | Size/Carton | Weight |
|--------------|----------------------------|------------------------------|---------|
| 08MHSTB75 | TB-75 STAINLESS STEEL BAR | 10 LF per piece 20 / tube | 98 lbs. |
| 08MHSTB125 | TB-125 STAINLESS STEEL BAR | 10 LF per piece 20 / tube | 49 lbs. |

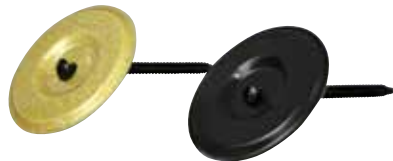

INDUCTION WELD PLATES

The Induction Weld Plates for TPO or PVC Fastening Plate is designed to attach the roofing membrane from the underside using the RhinoBond induction-welding tool.

| Product Code | Size | Carton | Weight | Color |
|--------------|-------------------------|--------|---------|--------|
| 08MHPIWPL3 | 3" PVC - Induction Weld | 500 | 37 lbs. | White |
| 08MHTIWPL3 | 3" TPO - Induction Weld | 500 | 37 lbs. | Bronze |
| 08MHRBPP3 | 3" PVC - RhinoBond | 500 | 37 lbs. | Black |
| 08MHRBTP3 | 3" TPO - RhinoBond | 500 | 37 lbs. | Gold |



#14 HEAVY DUTY BI-METAL STAINLESS STEEL FASTENERS

#14 HD Fasteners is an ideal "all-purpose fastener" for use in steel, structural concrete, and wood decks for insulation or lap attachment. Allow a minimum of 1" penetration through the underside of steel decks and a minimum of 1" embedment in wood plank.

| Product Code | Size | Carton | Weight |
|--------------|--------|--------|-----------|
| 08MHSTS112 | 1-1/2" | 1000 | 12 lbs. |
| 08MHSTS2 | 2" | 1000 | 15.2 lbs. |
| 08MHSTS3 | 3" | 1000 | 22.7 lbs. |
| 08MHSTS4 | 4" | 1000 | 29.6 lbs. |
| 08MHSTS5 | 5" | 1000 | 36.4 lbs. |
| 08MHSTS6 | 6" | 1000 | 43.6 lbs. |
| 08MHSTS75 | 7" | 500 | 25.5 lbs. |
| 08MHSTS85 | 8" | 500 | 28.3 lbs. |
| 08MHSTS102 | 10" | 250 | 35.2 lbs. |
| 08MHSTS122 | 12" | 250 | 43.8 lbs. |



TRU-SPIKE FASTENERS

A one-piece, vibration-resistant anchor designed to attach insulation, single-ply roofing, wood and steel to structural concrete roof decks and walls. Featuring an "S" shaped configuration at the working end to create an expansion mechanism, it provides a fast, reliable fastening solution for roof applications over structural concrete surfaces.

| Product Code | Size | Carton | Weight |
|--------------|--------|--------|-----------|
| 08MHTS114 | 1-1/4" | 500 | 13 lbs. |
| 08MHTS112 | 1-1/2" | 500 | 14 lbs. |
| 08MHTS2 | 2" | 500 | 16 lbs. |
| 08MHTS212 | 2-1/2" | 500 | 19 lbs. |
| 08MHTS3 | 3" | 500 | 21 lbs. |
| 08MHTS312 | 3-1/2" | 500 | 24 lbs. |
| 08MHTS4 | 4" | 500 | 26 lbs. |
| 08MHTS412 | 4-1/2" | 500 | 32 lbs. |
| 08MHTS5 | 5" | 500 | 34 lbs. |
| 08MHTS512 | 5-1/2" | 500 | 38 lbs. |
| 08MHTS6 | 6" | 250 | 22 lbs. |
| 08MHTS612 | 6-1/2" | 250 | 23 lbs. |
| 08MHTS7 | 7" | 250 | 24 lbs. |
| 08MHTS712 | 7-1/2" | 250 | 26 lbs. |
| 08MHTS8 | 8" | 250 | 27 lbs. |
| 08MHTS9 | 9" | 250 | 31 lbs. |
| 08MHTS10 | 10" | 250 | 34 lbs. |
| 08MHTS11 | 11" | 100 | 14.8 lbs. |
| 08MHTS12 | 12" | 100 | 16 lbs. |
| 08MHTS13 | 13" | 100 | 17.6 lbs. |
| 08MHTS14 | 14" | 100 | 19 lbs. |
| 08MHTS15 | 15" | 100 | 19 lbs. |
| 08MHTS16 | 16" | 100 | 19 lbs. |

MULTI-SYSTEM ACCESSORIES - HELIX MAX LOW-RISE



HELIX® MAX LOW-RISE ADHESIVE

Helix Max Low-Rise Adhesive is a VOC-free, construction-grade, two-component polyurethane adhesive designed to bond approved roof insulations and Fleece Back (TPO, PVC or PVC KEE) membranes to a variety of substrates.



CARTRIDGES

| Product Code | Description | Coverage | Carton | Weight |
|--------------|----------------|---|------------------------|---------|
| 08MHMDCC4 | Dual Cartridge | 4" Bead = 1-2 sq 6" Bead = 2-3 sq 12" Bead = 4-6 sq | 4 per ctn w/ 5 Tips | 20 lbs. |

Included in carton: 5 static mixing tips

TANKS & ACCESSORIES

| Product Code | Description | Coverage | Carton | Weight |
|--------------|-----------------------------------|---|--|---------|
| 08MHMTNKA | Low-Rise Adhesive Tank Part A | 4" Bead = 11-13 sq 6" Bead = 17-19 sq 12" Bead = 35-37 sq | 1 per ctn w/ Gun Assembly & 10 Tips | 59 lbs. |
| 08MHMTNKB | Low-Rise Adhesive Tank Part B | | 1 per ctn | 57 lbs. |
| 08MHMTKNT | Tank Nozzle Tips | | 10 per ctn | 3 lbs. |
| 08MHMTKET | Tank Nozzle 14" Extension Tips | NA | 10 per ctn | 4 lbs. |
| 08MHMTKGH | Tank Replacement Gun and 25' Hose | | 1 per ctn | 6 lbs. |

Included with Part A is the following: 25' hose/gun assembly, 10 tank static mixing tips, 10 extension tubes, petroleum jelly, and one wrench.

JUGS

| Product Code | Description | Coverage | Carton | Weight |
|--------------|---|---|--------|---------|
| 08MHMPA5 | Low-Rise Adhesive 5 Gallon Jug - Part A | 4" Bead = 6.7-9 sq 6" Bead = 10-12.5 sq 12" Bead = 17.5-25 sq | 1 each | 51 lbs. |
| 08MHMPB5 | Low-Rise Adhesive 5-Gallon Jug - Part B | | | 44 lbs. |

DRUMS

| Product Code | Description | Coverage | Carton | Weight |
|--------------|---|---|--------|----------|
| 08MHMPA15 | Low-Rise Adhesive 15-Gallon Drum Part A | 4" Bead = 21-27 sq 6" Bead = 30-45 sq 12" Bead = 60-75 sq | 1 each | 150 lbs. |
| 08MHMPB15 | Low-Rise Adhesive 15-Gallon Drum - Part B | | | 135 lbs. |
| 08MHMPA50 | Low-Rise Adhesive 50-Gallon Drum - Part A | 4" Bead = 67-90 sq 6" Bead = 100-150 sq 12" Bead = 200-250 sq | 1 each | 540 lbs. |
| 08MHMPB50 | Low-Rise Adhesive 50-Gallon Drum - Part B | | | 513 lbs. |

ACCESSORIES

| Product Code | Description | Coverage | Carton | Weight |
|--------------|-----------------|----------|------------|--------|
| 08MHSSMT | Static Mix Tips | 1 | 20 per ctn | 3 lbs. |

These tips are used with cartridges and all bulk containers of Helix Max.

MULTI-SYSTEM ACCESSORIES - HELIX LOW-RISE

HELIX® LOW-RISE ADHESIVE

Helix Low-Rise Adhesive is a two-component, low-rise, construction grade, polyurethane foam adhesive designed to adhere roof insulations, cover boards and fleece backed single-ply membranes to acceptable substrates in both new construction and recover applications. Helix Low-Rise Adhesive is applied in continuous beads for board and insulation attachment or applied in splatter coat coverage, or continuous beads for fleece back membrane attachment.



CARTRIDGES

| Product Code | Description | Coverage (SqFt) | Carton | Weight |
|--------------|---------------------------------|--|------------------------|--------|
| 08MHHLRACC | Low-Rise Adhesive Cartridge Kit | 4" Bead = 165 6" Bead = 250 12" Bead = 500 | 4 per ctn w/ 6 Tips | 18 lbs |
| 08MHHLRACT | Static Mix Tips | NA | 10 per bag | 1 lbs. |



TANKS & ACCESSORIES

| Product Code | Description | Coverage (SqFt) | Carton | Weight |
|--------------|--|--|---|--------|
| 08MHHLTNKA | Roofing Adhesive Tank - Part A | 4" Bead = 1,665 6" Bead = 1,750 12" Bead = 3,500 | Sold in Pairs (1) Part A Tank with gun/hose assembly, accessory kit, straws & (1) Part B Tank | 55 lbs |
| 08MHHLTNKB | Roofing Adhesive Tank - Part B | | 59 lbs | |
| 08MHHLRATG | Gun Assembly with 25' Hose | NA | 1 Box | NA |
| 08MHHLRATT | 10 Static Mixers, 10 Shower Cap Tips, Petroleum Jelly Packet, 1 Push-to-Connect Manifold, 1 Nox Valve, Instruction Sheet | NA | 1 Bag | NA |



15- AND 50-GALLON DRUMS

| Product Code | Description | Coverage (SqFt) | Carton | Weight |
|--------------|--|---|--|----------|
| 08MHHLRAPA | Low-Rise Adhesive 15-Gallon Drum, Part A | 4" Bead = 3,000 6" Bead = 4,500 12" Bead = 7,500 | Sold in Pairs (1) Part A Drum (1) Part B Drum | 275 lbs. |
| 08MHHLRAPB | Low-Rise Adhesive 15-Gallon Drum, Part B | | | |
| 08MHHLRADA | Low-Rise Adhesive 50-Gallon Drum, Part A | 4" Bead = 10,000 6" Bead = 15,000 12" Bead = 25,000 | | 991 lbs. |
| 08MHHLRADB | Low-Rise Adhesive 50-Gallon Drum, Part B | | | |



The TAP Adhesive Pump and its accessory components are not sold by MuleHide. For additional information or support with the TAP Adhesive pump or its accessory components, contact Hapco Inc. @Hapcoinc.com

TAP Adhesive Pump Equipment as shown with Helix 15-Gallon Adhesive Drums

MULTI-SYSTEM ACCESSORIES - ROOF DRAINS

NEW CONSTRUCTION ROOF DRAINS

- Clamping ring underside is ribbed and embossed to help secure membrane to drain ring
- Design forces drainage, restricting water flow swirling effects
- Increase water flow with elevated strainer ring risers
- Maximize drainage: Heavy duty epoxy-coated aluminum clamping ring – 1-1/4" high with 12 scallops and seep holes on the bottom
- Meets and exceeds ANSI, ASEE, PDI and IAPMO plumbing standards
- Flexible rubber coupling connects to PVC or cast iron pipe
- Aluminum underdeck clamp fastens drain securely to deck



PVC ROOF DRAIN KIT (FOR NEW INSTALLATION)

| Product Code | Description | Flange Dia. | Strainer Type | Strainer Dia. | Weight |
|--------------|-------------|-------------|---------------|---------------|---------|
| 17MHPNDK3 | 3" PVC | 10" | Plastic | 10" | 8 lbs. |
| 17MHPNDK4 | 4" PVC | | | | |
| 17MHPNDK5 | 5" PVC | | | | |
| 17MHPNDK6 | 6" PVC | 15" | | 12" | 27 lbs. |

CAST IRON ROOF DRAIN KIT (FOR NEW INSTALLATION)

| Product Code | Description | Flange Dia. | Strainer Type | Strainer Dia. | Weight |
|--------------|---------------|-------------|---------------|---------------|---------|
| 17MHCINDK3 | 3" Cast Iron | 10" | Plastic | 10" | 14 lbs. |
| 17MHCINDK4 | 4" Cast Iron | | | | 16 lbs. |
| 17MHCINDK5 | 5" Cast Iron | | | | 32 lbs. |
| 17MHCINDK6 | 6" Cast Iron | 15" | | 12" | 34 lbs. |
| 17MHCINDK8 | 8" Cast Iron | | | | |
| 17MHCINDK0 | 10" Cast Iron | | | | |



RETROFIT ROOF DRAINS

- Meets and exceeds ANSI/SPRI RD1 for water flow
- Clamping ring underside is ribbed and embossed to help secure membrane to drain ring
- Design forces drainage, restricting water flow swirling effects
- Increase water flow with elevated strainer ring risers
- Large stud diameter increases hardware strength
- TPO- and PVC-coated flange options offer cost-effective solution for contractors who prefer to heat-weld to flange

COPPER RETROFIT DRAIN with SEALANT TAPE

| Product Code | Description | Weight | Flange Dia. | Outlet Length | Strainer Type | Strainer Dia. |
|--------------|-----------------------------------|--------|-------------|---------------|---------------|---------------|
| 17MHRDT2 | 2" Copper | 6 lbs. | | | | |
| 17MHRDT2T | 2" Copper - TPO Coated Flange | | | | | |
| 17MHRDT2P | 2" Copper - PVC Coated Flange | | | | | |
| 17MHRDT2A | 2" Copper - Asphalt Coated Flange | | | | | |
| 17MHRDT3 | 3" Copper | | | | | |
| 17MHRDT3T | 3" Copper - TPO Coated Flange | | | | | |
| 17MHRDT3P | 3" Copper - PVC Coated Flange | 7 lbs. | 14" | 9" | Plastic | 10" |
| 17MHRDT3A | 3" Copper - Asphalt Coated Flange | | | | | |
| 17MHRDT4 | 4" Copper | | | | | |
| 17MHRDT4T | 4" Copper - TPO Coated Flange | | | | | |
| 17MHRDT4P | 4" Copper - PVC Coated Flange | | | | | |
| 17MHRDT4A | 4" Copper - Asphalt Coated Flange | | | | | |
| 17MHRDT5 | 5" Copper | 9 lbs. | | | | |
| 17MHRDT5T | 5" Copper - TPO Coated Flange | | | | | |
| 17MHRDT5P | 5" Copper - PVC Coated Flange | | | | | |
| 17MHRDT5A | 5" Copper - Asphalt Coated Flange | | | | | |
| 17MHRDT6 | 6" Copper | | | | | |
| 17MHRDT6T | 6" Copper - TPO Coated Flange | | | | | |
| 17MHRDT6P | 6" Copper - PVC Coated Flange | | | | | |
| 17MHRDT6A | 6" Copper - Asphalt Coated Flange | | | | | |



MULTI-SYSTEM ACCESSORIES - ROOF DRAINS

ALUMINATOR RETROFIT DRAIN with MAXXFLO SEAL (INCLUDES 1 TOOL PER CARTON)

| Product Code | Description | Weight | Flange Dia. | Outlet Length | Strainer Type | Strainer Dia. |
|--------------|-------------------------------------|---------|-------------|---------------|---------------|---------------|
| 17MHALRD3 | 3" Aluminum | 10 lbs. | 16" | 12" | Aluminum | 10" |
| 17MHALRD3T | 3" Aluminum - TPO Coated Flange | | | | | |
| 17MHALRD3P | 3" Aluminum - PVC Coated Flange | | | | | |
| 17MHALRD3A | 3" Aluminum - Asphalt Coated Flange | 12 lbs. | | | | |
| 17MHALRD4 | 4" Aluminum | | | | | |
| 17MHALRD4T | 4" Aluminum - TPO Coated Flange | | | | | |
| 17MHALRD4P | 4" Aluminum - PVC Coated Flange | 14 lbs. | | | | |
| 17MHALRD4A | 4" Aluminum - Asphalt Coated Flange | | | | | |
| 17MHALRD5 | 5" Aluminum | | | | | |
| 17MHALRD5T | 5" Aluminum - TPO Coated Flange | 14 lbs. | | | | |
| 17MHALRD5P | 5" Aluminum - PVC Coated Flange | | | | | |
| 17MHALRD5A | 5" Aluminum - Asphalt Coated Flange | | | | | |
| 17MHALRD6 | 6" Aluminum | 14 lbs. | | | | |
| 17MHALRD6T | 6" Aluminum - TPO Coated Flange | | | | | |
| 17MHALRD6P | 6" Aluminum - PVC Coated Flange | | | | | |
| 17MHALRD6A | 6" Aluminum - Asphalt Coated Flange | 14 lbs. | | | | |
| 17MHALRD8 | 8" Aluminum | | | | | |
| 17MHALRD8T | 8" Aluminum - TPO Coated Flange | | | | | |
| 17MHALRD8P | 8" Aluminum - PVC Coated Flange | 14 lbs. | | | | |
| 17MHALRD8A | 8" Aluminum - Asphalt Coated Flange | | | | | |

Note: One MAXXFLO tool is packed into each Aluminator carton. Additional tools can be purchased by calling Customer Service.



ALUMINUM RETROFIT DRAIN with SEALANT TAPE

| Product Code | Description | Weight | Flange Dia. | Outlet Length | Strainer Type | Strainer Dia. |
|--------------|--------------------------------------|--------|-------------|---------------|---------------|---------------|
| 17MHARDT2 | 2" Aluminum | 6 lbs. | 16" | 12" | Plastic | 10" |
| 17MHARDT2T | 2" Aluminum - TPO Coated Flange | | | | | |
| 17MHARDT2P | 2" Aluminum - PVC Coated Flange | | | | | |
| 17MHARDT2A | 2" Aluminum - Asphalt Coated Flange | | | | | |
| 17MHARDT3 | 3" Aluminum | | | | | |
| 17MHARDT3T | 3" Aluminum - TPO Coated Flange | | | | | |
| 17MHARDT3P | 3" Aluminum - PVC Coated Flange | | | | | |
| 17MHARDT3A | 3" Aluminum - Asphalt Coated Flange | | | | | |
| 17MHARDT4 | 4" Aluminum | | | | | |
| 17MHARDT4T | 4" Aluminum - TPO Coated Flange | | | | | |
| 17MHARDT4P | 4" Aluminum - PVC Coated Flange | | | | | |
| 17MHARDT4A | 4" Aluminum - Asphalt Coated Flange | | | | | |
| 17MHARDT5 | 5" Aluminum | | | | | |
| 17MHARDT5T | 5" Aluminum - TPO Coated Flange | | | | | |
| 17MHARDT5P | 5" Aluminum - PVC Coated Flange | 6 lbs. | | | | |
| 17MHARDT5A | 5" Aluminum - Asphalt Coated Flange | | | | | |
| 17MHARDT6 | 6" Aluminum | | | | | |
| 17MHARDT6T | 6" Aluminum - TPO Coated Flange | 6 lbs. | | | | |
| 17MHARDT6P | 6" Aluminum - PVC Coated Flange | | | | | |
| 17MHARDT6A | 6" Aluminum - Asphalt Coated Flange | | | | | |
| 17MHARDT8 | 8" Aluminum | 6 lbs. | | | | |
| 17MHARDT8T | 8" Aluminum - TPO Coated Flange | | | | | |
| 17MHARDT8P | 8" Aluminum - PVC Coated Flange | | | | | |
| 17MHARDT8A | 8" Aluminum - Asphalt Coated Flange | 6 lbs. | | | | |
| 17MHARDT10 | 10" Aluminum | | | | | |
| 17MHARDT10T | 10" Aluminum - TPO Coated Flange | | | | | |
| 17MHARDT10P | 10" Aluminum - PVC Coated Flange | 6 lbs. | | | | |
| 17MHARDT10A | 10" Aluminum - Asphalt Coated Flange | | | | | |



MULTI-SYSTEM ACCESSORIES - ROOF DRAINS



ALUMINUM RETROFIT DRAIN with SEALANT TAPE and ALUMINUM STRAINER

| Product Code | Description | Weight | Flange Dia. | Outlet Length | Strainer Type | Strainer Dia. |
|--------------|--|--------|-------------|---------------|---------------|---------------|
| 17MHARDA2 | 2" Retro Drain - Aluminum Strainer | 6 lbs. | 16" | 12" | Aluminum | 10" |
| 17MHARDA2T | 2" Retro Drain - TPO Aluminum Strainer | | | | | |
| 17MHARDA2P | 2" Retro Drain - PVC Aluminum Strainer | | | | | |
| 17MHARDA2A | 2" Retro Drain - Asphalt Aluminum Strainer | | | | | |
| 17MHARDA3 | 3" Retro Drain - Aluminum Strainer | | | | | |
| 17MHARDA3T | 3" Retro Drain - TPO Aluminum Strainer | | | | | |
| 17MHARDA3P | 3" Retro Drain - PVC Aluminum Strainer | | | | | |
| 17MHARDA3A | 3" Retro Drain - Asphalt Aluminum Strainer | | | | | |
| 17MHARDA4 | 4" Retro Drain - Aluminum Strainer | | | | | |
| 17MHARDA4T | 4" Retro Drain - TPO Aluminum Strainer | | | | | |
| 17MHARDA4P | 4" Retro Drain - PVC Aluminum Strainer | | | | | |
| 17MHARDA4A | 4" Retro Drain - Asphalt Aluminum Strainer | | | | | |
| 17MHARDA5 | 5" Aluminum - Aluminum Strainer | | | | | |
| 17MHARDA5T | 5" Aluminum - TPO Aluminum Strainer | | | | | |
| 17MHARDA5P | 5" Aluminum - PVC Aluminum Strainer | | | | | |
| 17MHARDA5A | 5" Aluminum - Asphalt Aluminum Strainer | | | | | |
| 17MHARDA6 | 6" Aluminum - Aluminum Strainer | | | | | |
| 17MHARDA6T | 6" Aluminum - TPO Aluminum Strainer | | | | | |
| 17MHARDA6P | 6" Aluminum - PVC Aluminum Strainer | | | | | |
| 17MHARDA6A | 6" Aluminum - Asphalt Aluminum Strainer | | | | | |
| 17MHARDA8 | 8" Aluminum - Aluminum Strainer | | | | | |
| 17MHARDA8T | 8" Aluminum - TPO Aluminum Strainer | | | | | |
| 17MHARDA8P | 8" Aluminum - PVC Aluminum Strainer | | | | | |
| 17MHARDA8A | 8" Aluminum - Asphalt Aluminum Strainer | | | | | |

DRAIN ACCESSORIES

| Product Code | Description | Weight | Flange Dia. | Strainer Type | Strainer Dia. |
|--------------|--------------------------|--------|-------------|---------------|---------------|
| 17MHODI2 | 2" Drain Overflow Insert | 2 lbs. | NA | Aluminum | NA |
| 17MHODI4 | 4" Drain Overflow Insert | | | | |




MULTI-SYSTEM ACCESSORIES - ROOF INSULATION



POLY-ISO FLAT & TAPERED (4'X4', 4'X8' OR 4'X12')

MuleHide Poly ISO 1™ polyisocyanurate insulation (flat or tapered) is a closed-cell polyisocyanurate foam core laminated to (non-asphaltic) glass fiber reinforced felt facers. Featuring glass facer with a light and dark side, allowing the installer to choose which side to install up to control flash-off times in fully adhered applications. The product insulations are compatible with all MuleHide membranes and accessories and are available in 20 and 25 psi densities. MuleHide Poly ISO insulation boards may be used for ballasted, mechanically attached and fully adhered single-ply roofing systems. Poly ISO insulation board may be installed over approved decks and substrates on new construction, tearoffs and recover (retrofit) projects. Rated for use in UL Class A and FM Class 1 assemblies.



POLY-ISO COATED GLASS FACER, FLAT & TAPERED (4'X4', 4'X8')

MuleHide Poly ISO 1-DWD or Poly ISO 2 CG is a rigid roof insulation panel composed of a closed cell polyisocyanurate foam core manufactured on-line to a premium performance coated glass facer on both sides (CGF). Manufactured using premium performance coated glass facer with a light and dark side, allowing the installer to choose which side to install up to control flash-off times in fully adhered applications. Available in 20 psi and 25 psi.



POLY ISO 1-HD

MuleHide Poly ISO 1-HD is 1/2" thick, 100 psi high-density polyisocyanurate insulation board specifically designed for use as a cover board. Consists of a closed-cell polyisocyanurate foam core laminated to premium performance coated glass fiber felt facers. MuleHide Poly ISO 1-HD is designed for use as a cover board over roof insulation boards or existing membranes. Compatible with single-ply roofing systems (ballasted, mechanically attached and fully adhered) and modified bitumen roofing systems, on new construction, tearoff and recover (retrofit) projects. Suitable for use with approved fasteners and plates, and low-rise foam adhesive. Poly ISO 1-HD can achieve a FM hail resistance rating of SH-1 with certain membranes.

| Product | Product Code | Thickness | Size | PCS/Unit | Units/Truck |
|---------------|--------------|-----------|---------|----------|-------------|
| Poly ISO 1-HD | 58MHHD0544 | 1/2" | 4' x 4' | 96 | 48 |
| | 58MHHD0548 | 1/2" | 4' x 8' | 45 | 24 |

MULTI-SYSTEM ACCESSORIES - COVER BOARDS



STRUCTODEK® HD WITH PRIMED RED COATING

The non-asphaltic primed red coating integrated on the surface possesses superior adhesion capabilities with current membrane and adhesive technology. The non-asphaltic primed red coating is compatible with all single-ply membranes including PVC, TPO and EPDM, as well as modified bitumen and BUR without concern of premature membrane degradation that is often associated with asphalt emulsion coated fiberboard products. Additionally, the Primed Red Coating, unlike asphalt emulsion coated products, has proven to be compatible with traditional, low-VOC and water-based adhesives as well as many foam adhesives.

| Product | Product Code | Thickness | Size | PCS/Unit | Units/Truck |
|------------|--------------|-----------|---------|----------|-------------|
| STRUCTODEK | 56MHHD0144 | 1" | 4' X 4' | 90 | 4320 |
| | 56MHHD0148 | 1" | 4' X 8' | 90 | 2160 |
| | 56MHHD1244 | 1/2" | 4' X 4' | 90 | 4320 |
| | 56MHHD1248 | 1/2" | 4' X 8' | 90 | 2160 |

MULTI-SYSTEM ACCESSORIES - COVER BOARDS



DENSDECK®

DensDeck® Prime Roof Board has been enhanced to provide a broader compatibility and higher performance with roofing adhesives. Face mat enhancements allow adhesives to be applied more uniformly and consistently. In adhered, single-ply membrane testing, enhanced DensDeck® Prime demonstrated an average of 24% better bond than the original products, when using solvent-based adhesives.

| Product | Product Code | Thickness | Size | PCS/Unit | Units/Truck |
|-------------------------|--------------|-----------|---------|----------|-------------|
| DensDeck® | 62MHDD1448 | 1/4" | 4' X 8' | 42 | 28-29 |
| | 62MHDD1248 | 1/2" | 4' X 8' | 30 | 24-25 |
| | 62MHDD5848 | 5/8" | 4' X 8' | 30 | 18-19 |
| DensDeck® Prime | 62MHDP1444 | 1/4" | 4' X 4' | 60 | 40-42 |
| | 62MHDP1448 | 1/4" | 4' X 8' | 42 | 28-29 |
| | 62MHDP1244 | 1/2" | 4' X 4' | 50 | 29-30 |
| | 62MHDP1248 | 1/2" | 4' X 8' | 30 | 24-25 |
| | 62MHDP5844 | 5/8" | 4' X 4' | 40 | 29-30 |
| | 62MHDP5848 | 5/8" | 4' X 8' | 30 | 18-19 |
| DensDeck® ProFast Prime | 62MHDF3848 | 3/8" | 4' X 8' | 36 | 24-25 |



**Special order minimum 3 week lead time

SECUROCK®

Gypsum-fiber roof board is a high-performance roof board for use in low-slope roofing systems. Its unique, fiber-reinforced, homogenous composition gives the panel strength and water resistance through to the core. Securock® roof boards provide exceptional bond and low absorption in adhered systems and with its homogenous composition achieves high wind-uplift ratings with no risk of facer delamination. Made from 97% recycled material, Securock® roof boards combine superior performance with sustainable design for all types of roofing systems including single-ply, fluid-applied, built-up, spray foam, metal and modified bitumen roofing.

| Product | Product Code | Thickness | Size | PCS/Unit | Units/Truck |
|--------------------------------------|--------------|-----------|------------|----------|-------------|
| Securock | 62MHSR1444 | 1/4" | 4' X 4' | 100 | 18 |
| | 62MHSR1448 | 1/4" | 4' X 8' | 50 | 18 |
| | 62MHSR3844 | 3/8" | 4' X 4' | 80 | 18 |
| | 62MHSR3848 | 3/8" | 4' X 8' | 40 | 18 |
| | 62MHSR1244 | 1/2" | 4' X 4' | 60 | 19 |
| | 62MHSR1248 | 1/2" | 4' X 8' | 30 | 19 |
| | 62MHSR5844 | 5/8" | 4' X 4' | 48 | 19 |
| | 62MHSR5848 | 5/8" | 4' X 8' | 24 | 19 |
| Securock UltraLight Coated Glass Mat | 62MHSC1444 | 1/4"*** | 4' X 4' | 100 | 18 |
| | 62MHSC1448 | 1/4" | 4' X 8' | 50 | 18 |
| | 62MHSC1244 | 1/2"*** | 4' X 4' | 60 | 19 |
| | 62MHSC1248 | 1/2" | 4' X 8' | 30 | 19 |
| | 62MHSC5844 | 5/8"*** | 4' X 4' | 48 | 19 |
| Securock UltraLight Glass Mat | 62MHSC5848 | 5/8" | 4' X 8' | 24 | 19 |
| | 62MHSG1448 | 1/4" | 4' X 8' | 42 | 27 |
| | 62MHSG1248 | 1/2" | 4' X 8' | 30 | 24 |
| Securock Concrete Patch | 62MHSG5848 | 5/8" | 4' X 8' | 30 | 16 |
| | 62MHSRCP50 | | 50 lb. bag | 1 | |

MULTI-SYSTEM ACCESSORIES - AIR & VAPOR BARRIER




















F5 AIR & VAPOR BARRIER






A 40-Mil composite consisting of 35-Mils of self-adhering rubberized asphalt laminated to a 5-Mil woven polypropylene film. A siliconized one-piece release liner prevents the material from bonding to itself in the roll and is easily removed for installation. F5 Air & Vapor Barrier is available in a 325 sq. ft. roll with dimensions of 39"x 100'. The factory-controlled thickness of the membrane ensures uniform barrier properties, and the woven polypropylene film increases strength and has a non-skid surface suitable for the bonding of subsequent layers.

| Product Code | Description | Coverage | Carton | Weight |
|--------------|-----------------------------------|-------------|-----------|---------|
| 09MHF5AVB1 | 39" x 100' F5 Air & Vapor Barrier | 325 sq. ft. | 1 per ctn | 63 lbs. |

MULTI-SYSTEM ACCESSORIES - EDGE METAL






| FASCIA PRODUCT LINE | VERSIONS |
|--|---|
|  ECLIPSE EDGE | <ul style="list-style-type: none"> • Single-Ply |
|  ECLIPSE EDGE MB | <ul style="list-style-type: none"> • Single-Ply • Built-Up or Modified |
|  ECLIPSE EDGE EXTENDED MB | <ul style="list-style-type: none"> • Single-Ply • Built-Up or Modified |
|  2-PIECE SNAP-ON COMPRESSION | <ul style="list-style-type: none"> • Single-Ply, Snap-On • Single-Ply, Crimp-On |
|  2-PIECE SNAP-ON COMPRESSION MB | <ul style="list-style-type: none"> • Built-Up or Modified |
|  1-3/4" FASCIA COVER | <ul style="list-style-type: none"> • Formed |
|  4" FASCIA COVER | <ul style="list-style-type: none"> • 4" |
|  COUNTERFLASHING | <ul style="list-style-type: none"> • 1-Piece Reglet • 2-Piece Reglet • 1-Piece Surface Mounted |

| FASCIA PRODUCT LINE | VERSIONS |
|--|--|
|  EXTRUDED FASCIA | <ul style="list-style-type: none"> • Fully Adhered or Mechanically Attached |
|  EXTRUDED FASCIA MB | <ul style="list-style-type: none"> • Built-Up or Modified |
|  EXTENDED EXTRUDED FASCIA | <ul style="list-style-type: none"> • Fully Adhered or Mechanically Attached |
|  EXTENDED EXTRUDED FASCIA MB | <ul style="list-style-type: none"> • Built-Up or Modified |
|  HEAVY GAUGE EXTRUDED FASCIA | <ul style="list-style-type: none"> • Fully Adhered or Mechanically Attached |
|  HEAVY GAUGE EXTRUDED FASCIA MB | <ul style="list-style-type: none"> • Built-Up or Modified |
|  CANTED WATERDAM EXTRUDED FASCIA | <ul style="list-style-type: none"> • Galvanized |
|  CANTED EXTENDED WATERDAM EXTRUDED FASCIA | <ul style="list-style-type: none"> • Galvanized |
|  ONE FASCIA & ONE EXTENDED FASCIA | <ul style="list-style-type: none"> • Fully Adhered or Mechanically Attached |

| DRIP EDGE PRODUCT LINE | VERSIONS |
|--|---|
|  DRIP EDGE | <ul style="list-style-type: none"> • Kynar • Flash-Thru |
|  DRIP EDGE | <ul style="list-style-type: none"> • TPO or PVC Coated |
|  SKIRTED DRIP EDGE | <ul style="list-style-type: none"> • TPO or PVC Coated (Skirted) |
|  GRAVEL STOP | <ul style="list-style-type: none"> • Kynar |
|  EXTRUDED DRIP EDGE | <ul style="list-style-type: none"> • Flat Roof Flange |

| WOOD NAILER PRODUCT LINE | VERSIONS |
|---|---|
|  NAILER T | <ul style="list-style-type: none"> • Wood Nailer Alternative |
|  NAILER BOX RI | <ul style="list-style-type: none"> • Wood Nailer Alternative |

MULTI-SYSTEM ACCESSORIES - EDGE METAL











| COPING PRODUCT LINE | VERSIONS |
|---|---|
|  <p>COPING</p> | <ul style="list-style-type: none"> • Tapered • Flat • Existing Slope |
|  <p>SNAP COPING</p> | <ul style="list-style-type: none"> • Tapered • Flat • Existing Slope |
|  <p>SNAP GOLD COPING</p> | <ul style="list-style-type: none"> • Tapered • Flat • Existing Slope |
|  <p>CANTILEVER COPING</p> | <ul style="list-style-type: none"> • Single • Double |
|  <p>CONTINUOUS CLEAT COPING</p> | <ul style="list-style-type: none"> • Tapered |

| WATER CONTROL PRODUCT LINE | VERSIONS |
|--|---|
|  <p>GUTTER</p> | <ul style="list-style-type: none"> • Champfer |
|  <p>DOWNSPOUTS</p> | <ul style="list-style-type: none"> • Closed • Open Face |





















Color Options

These color reproductions are as accurate as modern printing technology will permit and may vary slightly from actual colors supplied. Finished color chip samples are available upon request.

Express Colors*

| | | | | |
|---|---|--|---|---|
|  |  |  |  |  |
| Almond | Bone White | Cityscape | Clear Anodized | Dark Bronze |
|  |  |  |  |  |
| Medium Bronze | Sandstone | Sierra Tan | Slate Gray | Stone White |

Standard Colors

| | | | | |
|---|---|--|---|---|
|  |  |  |  |  |
| Black ▲ | Burnished Slate | Cardinal Red | Charcoal | Classic Bronze |
|  |  |  |  |  |
| Colonial Red | Forest Green | Granite | Graphite | Hemlock Green |
|  |  |  |  |  |
| Inkwell | Interstate Blue | Iron Ore | Mansard Brown | Midnight Bronze |
|  |  |  |  |  |
| Musket Gray | Onyx ▲ | Pacific Blue | Patina Green | Terra Cotta |

Premium Colors

| | | | | |
|---|---|--|---|---|
|  |  |  |  |  |
| Anodic Clear | Award Blue | Champagne | Copper Penny | Silver |
|  |  | | | |
| Silversmith | Weathered Zinc | | | |

* = Also in Mill Finish
▲ = Must Specify Supplier



To view the full line of Edge Metal & Accessories including metal options and sizes, scan the QR code.

Our colors are deep, rich and true. Made of Valspar's Fluorpon® High Performance Hylar 5000®/Kynar 500® finish, they offer the ultimate in resistance against fading and weathering. Custom colors also available.

MULTI-SYSTEM ACCESSORIES - CAULKS & SEALANTS



100% SILICONE SEALANT

Is a high-solids non-shrinking moisture-cure silicone sealant that has minimal odor, contains no solvents and has less than 10 grams per liter VOC. Provides excellent adhesion to concrete, masonry, polyurethane foam, EPDM, TPO, aged PVC, aged acrylic coatings, granular cap sheet, wood, metals, Kynar® Finishes and most other common building materials. MuleHide Si TPO Primer is required for TPO roof membranes.

Removable Tip



| Product Code | Color | Description | Coverage | Shelf Life |
|--------------|-------|-----------------|-------------------------|------------|
| 16MHSISECL | Clear | 1 tube (30/ctn) | 25 Ln Ft with 1/4" bead | 1 Year |
| 16MHSISEWH | White | 1 tube (30/ctn) | | |



RGA 1

Flashing Cement is the highest quality, most versatile asphalt-based roof cement ever developed. This distinctive product is intended for use by quality-driven roofing professionals who demand that their materials meet the highest performance standards. Its outstanding adhesion to wet, dry and even underwater surfaces allows application in any conditions. With wider usable temperature ranges, RGA 1 applies easily at seasonal temperature extremes.

Removable Tip



| Product Code | Color | Description | Coverage | Shelf Life |
|--------------|-------|-----------------|-------------------------|------------|
| 16MHRGA1BT | Black | 1 tube (30/ctn) | 20 Ln Ft with 1/4" bead | 2 Years |



SEBS 1

Is a high-performance, multipurpose thermoplastic elastomer-based roofing sealant. Provides excellent adhesion to most surfaces including the list above. Use to seal seams, flashings and penetrations on all types of roofs. Ideal for roofing applications where appearance is important.


Removable Tip



| Product Code | Color | Coverage | Carton | Shelf Life |
|--------------|--------------|-------------------------|----------------------|------------|
| 30MHSEB1BK | Black | 25 Ln Ft with 1/4" bead | (30) 10 oz tubes/ctn | 1 Year |
| 30MHSEB1PC | Clear | | | |
| 30MHSEB1GY | Gray | | | |
| 30MHSEB1RB | Royal Brown | | | |
| 30MHSEB1TZ | Terra Bronze | | | |
| 30MHSEB1WH | White | | | |

SEBS 1 Color Options:

Colors shown are matched as accurately as possible, but may vary slightly from finished product.

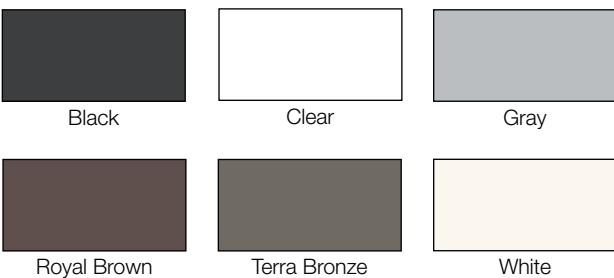

JTS 1 JOINT & TERMINATION SEALANT


JTS 1 is a moisture-cure urethane sealant made with 100% solids. JTS 1 seals large joints, roof termination bars and adheres to concrete, masonry, EPDM, PVC, TPO (primed), wood, vinyl and most other common building materials. *Removable Tip*



| Product Code | Color | Coverage | Carton | Shelf Life |
|--------------|---------------|-------------------------|----------------------|------------|
| 30MHJTS1BK | Black | 25 Ln Ft with 1/4" bead | (30) 10 oz tubes/ctn | 1 year |
| 30MHJTS1BZ | Bronze | | | |
| 30MHJTS1CL | Clear | | | |
| 30MHJTS1GY | Gray | | | |
| 30MHJTS1LS | Limestone | | | |
| 30MHJTS1MB | Medium Bronze | | | |
| 30MHJTS1TC | Terra Cotta | | | |
| 30MHJTS1WH | White | | | |
| 30MHJTS1WT | Wicker Tan | | | |

JTS 1 Color Options:

Colors shown are matched as accurately as possible, but may vary slightly from finished product.

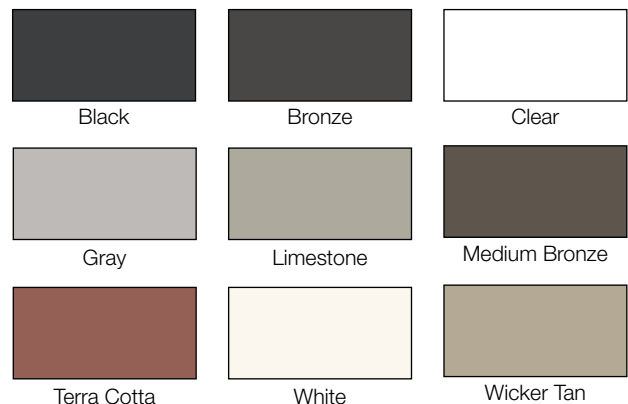

MULTI-SYSTEM ACCESSORIES - SHAPESHIFT LINE



REPAIR HERO

A solvent-based, fiber-reinforced terpolymer sealant intended for the repair of asphalt, modified bitumen, metal, Kynar®, concrete, TPO, PVC, Elvaloy®/PVC, Hypalon® (CSPE), PIB and EPDM roofs.



| Product Code | Description | Carton | Weight |
|--------------|-----------------------|--------|-----------|
| 16MHRHWH1 | 1-Gallon Pail - White | 4/ctn | 33.8 lbs. |
| 16MHRHWH3 | 3-Gallon Pail - White | 1 pail | 25 lbs. |
| 16MHRHBK1 | 1-Gallon Pail - Black | 4/ctn | 33.8 lbs. |
| 16MHRHBK3 | 3-Gallon Pail - Black | 1 pail | 25 lbs. |
| 16MHRHGY3 | 3-Gallon Pail - Gray | 1 pail | 25 lbs. |



MP LIQUID SEALANT

Single-component, non-shrink, advanced-technology sealant designed for sealing metal roof seams and fasteners, gutter seams and liquid flashings. Semi-self leveling sealant consisting of 100% solids which results in zero shrinkage.



| Product Code | Description | Carton | Shelf Life |
|--------------|----------------------|-------------------|------------|
| 08MHMPLS2W | 2 Liter Pouch, White | (4) 2 Liter Pouch | 1 Year |
| 08MHMPLS2B | 2 Liter Pouch, Black | | |



LARGE PITCH PAN KIT

Create (4) 7" Pitch Pans per kit. *Kit includes:* 16 corners, 16 straights, 3 tubes JTS 1 and 1 - 2 liter pouch of MP Liquid Sealant.



SMALL PITCH PAN KIT

Create (4) 4" Pitch Pans per kit. *Kit includes:* 16 corners, 2 tubes JTS 1 and 3 - 2 liter pouches of MP Liquid Sealant.

Customize kits by adding additional components.



| Product Code | Description | Carton | Weight |
|--------------|---------------------|--------|--------|
| 08MHSPKLWH | Large Pitch Pan Kit | 1 | 6 lbs. |
| 08MHSPKSWH | Small Pitch Pan Kit | 1 | 2 lbs. |



LIQUI-FLASH

A one-component, non-shrink, advanced technology polyurethane sealant designed for filling and sealing pitch pockets and pans, metal roof seams and fasteners, inlaid gutters, polyurethane foam, aged smooth asphalt and modified bitumen, aged PVC and EPDM roofs. Compatible with MuleHide acrylic and silicone roof coatings.



| Product Code | Description | Carton | Weight | Shelf Life |
|--------------|-------------------------|--------|-----------|------------|
| 16MHLFWH1 | 1-Gallon Pail - White | 1 pail | 33.8 lbs. | 2 yrs. |
| 16MHLFWH35 | 3.5-Gallon Pail - White | 1 pail | 25 lbs. | |
| 16MHLFBK1 | 1-Gallon Pail - Black | 1 pail | 33.8 lbs. | |
| 16MHLFBK35 | 3.5-Gallon Pail - Black | 1 pail | 25 lbs. | |
| 16MHLFGY1 | 1-Gallon Pail - Gray | 1 pail | 33.8 lbs. | |
| 16MHLFGY35 | 3.5-Gallon Pail - Gray | 1 pail | 25 lbs. | |



SHAPESHIFT PITCH PAN

Straight and outside corner sections snap together to create an endless number of pitch pan sizes to seal around roof projections. The pieces snap together with interlocking joints.



- Used to seal around roof projections on horizontal or vertical surfaces of mod-bit systems.
- Used to seal around roof projections on vertical surfaces of EPDM, TPO, or PVC.

| Product Code | Description | Carton | Weight |
|--------------|-------------|--------|--------|
| 08MHSSPC48 | Corners | 48 per | 6 lbs. |
| 08MHSSPC16 | Corners | 16 per | 2 lbs. |
| 08MHSSPS16 | Straights | 16 per | 2 lbs. |



SI TPO PRIMER

Promotes adhesion with our JTS 1 Sealant to new and aged TPO membranes.



| Product Code | Description | Color | Shelf Life |
|--------------|-------------------|-------|------------|
| 16MHSITPRP | 1 Pint (4/ctn) | Clear | 2 Years |
| 16MHSITPR1 | 1 Gallon (4/ctn) | Blue | |
| 16MHSITPR5 | 5 Gallon (1 pail) | Blue | |



“The name trusted in roofing since 1906”

Customer Line: 800-786-1492 • www.mulehide.com



The information herein should not be considered all-inclusive and should always be accompanied by a review of the MuleHide specifications and guidelines and good application practices.

This information herein is based upon data and knowledge considered to be true and accurate at the time of printing and is provided for the reader's consideration, investigation and verification. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. ("MuleHide"). MuleHide does not warrant any results to be obtained. Statements concerning possible use of MuleHide products are made without knowledge of your particular roof and such an application may not be fit for your particular purpose. MuleHide **DISCLAIMS ALL WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE**, except written warranties attached to MuleHide and written warranties signed by an officer of MuleHide.

Visit the MuleHide website at www.mulehide.com prior to any installation for updated technical specifications and details. MuleHide is a U.S. registered trademark. DensDeck is wholly owned registered trademark of Georgia-Pacific Gypsum LLC/Georgia-Pacific Wood Products LLC. SECUROCK is wholly owned registered trademark of USG Corporation. Kynar is wholly owned registered trademark of Arkema Inc. Elvaloy is wholly owned registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.