

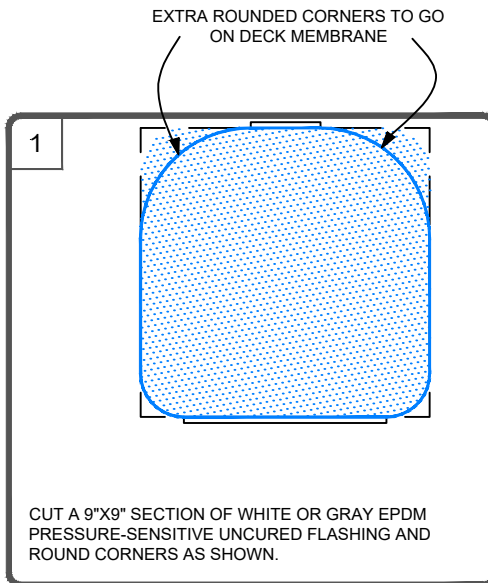


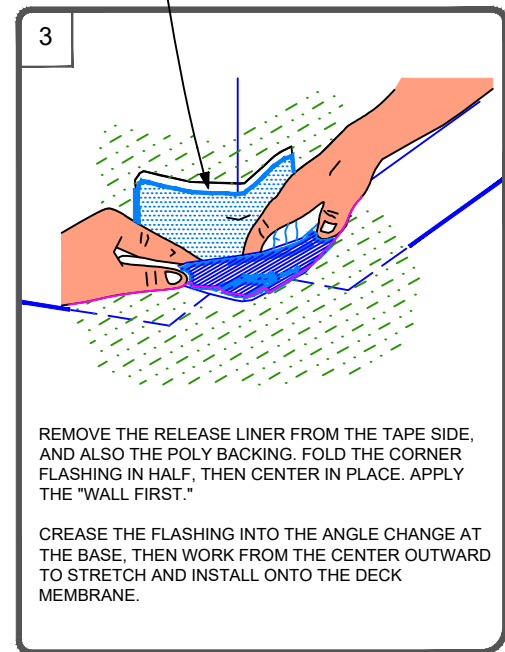

B

TPO REINFORCED MEMBRANE

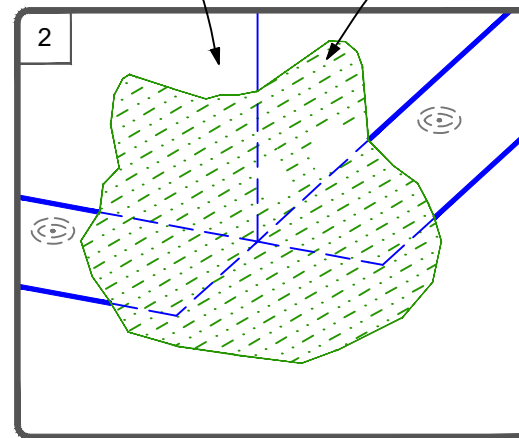


A

IN COLDER TEMPERATURES, APPLYING HEAT TO THE PRESSURE-SENSITIVE UNCURED FLASHING WITH A HEAT GUN IMMEDIATELY PRIOR TO INSTALLATION MAY BE NECESSARY FOR ITS ELASTICITY DURING INSTALLATION.

B

WHITE OR GRAY EPDM PS CURB WRAP W/ 20" TAPE MAY ALSO BE USED FOR CURB WALL FLASHING. IF USED, THEN PRIME THE OUTSIDE CORNER AREA WITH LOW VOC PRIMER.

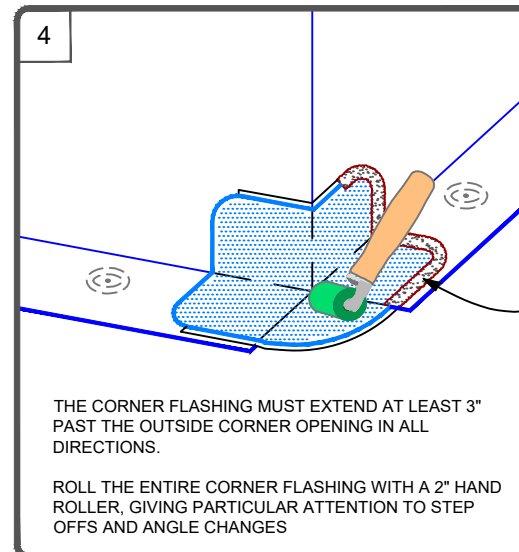

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)

TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED)
TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO OUTSIDE CORNER: 9" X 9" FIELD CUT WHITE OR GRAY EPDM PS UNCURED FLASHING

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS ACCEPTABLE FOR : **MAXIMUM 20 YEAR WARRANTY**

DETAIL NO.:

TP-CR-A704

REVISION DATE: 8/24/2026