
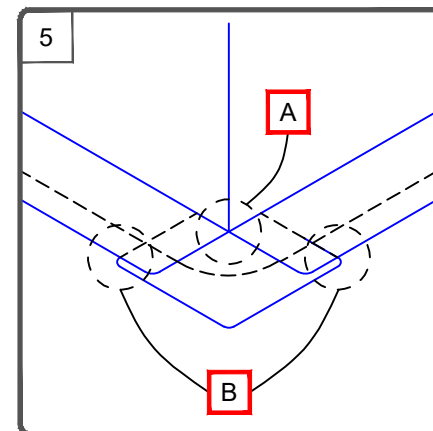
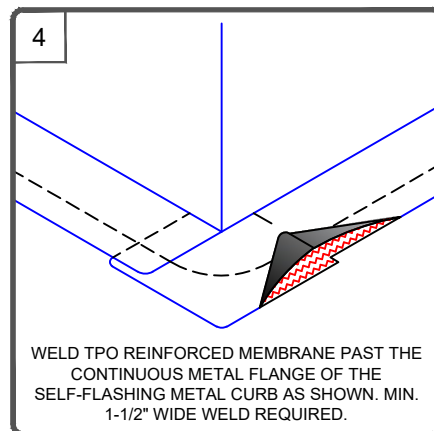
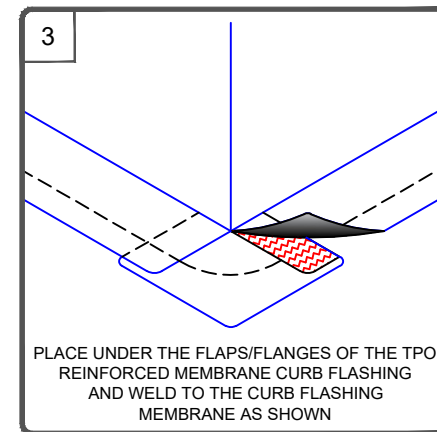
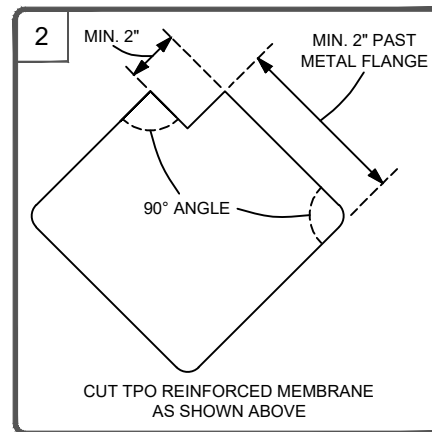


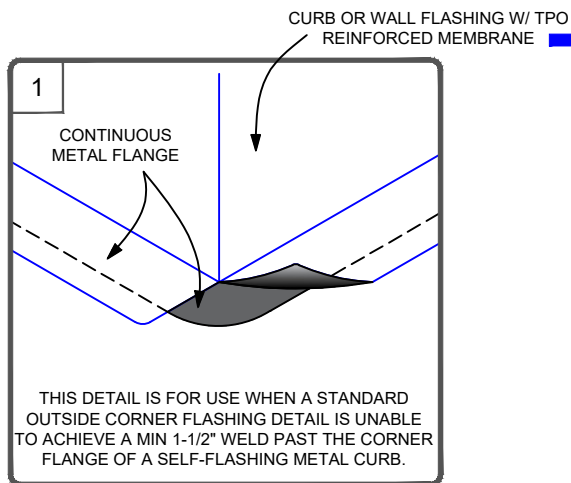

A FLASH PER APPLICABLE OUTSIDE CORNER DETAIL

B REFER TO T-JOINT PATCH DETAILS FOR REQUIREMENTS AT SEAM INTERSECTIONS

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
 TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
 TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
 TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO OUTSIDE CORNER PREP ON SELF-FLASHING CURB
 W/ LARGE METAL FLANGE

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
 ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-CR-C710

REVISION DATE: 8/24/2026