
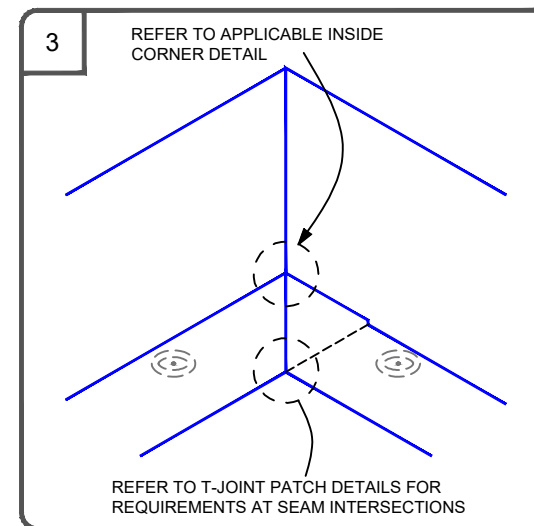
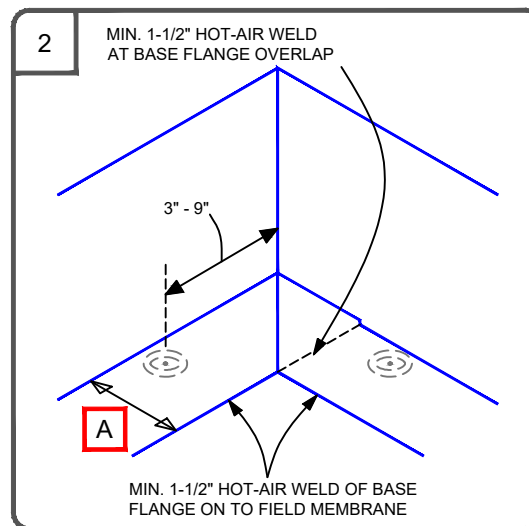


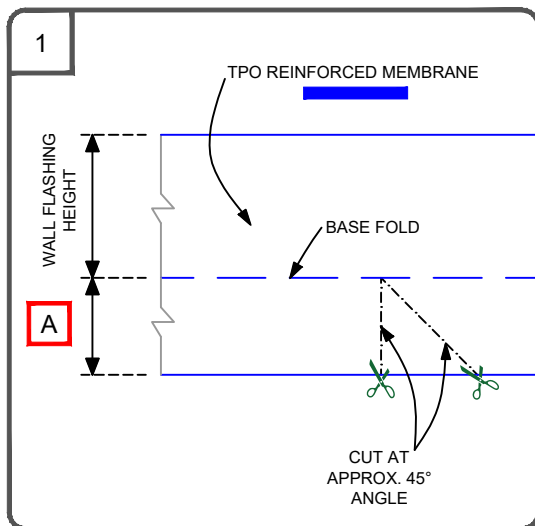

- A** BASE FLANGE OF CURB FLASHING MUST EXTEND ENOUGH TO ACHIEVE A MIN. 1-1/2" WIDE HEAT WELD PAST EDGE OF PLATES USED FOR MECHANICAL BASE ATTACHMENT
- B** 1/8" BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF REINFORCED TPO MEMBRANES

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
 TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
 TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
 TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO PARAPET INSIDE CORNER WALL FLASHING:
 STEP BY STEP W/ SEPARATE WALL FLASHING

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
 ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-CR-C705

REVISION DATE: 8/24/2026