

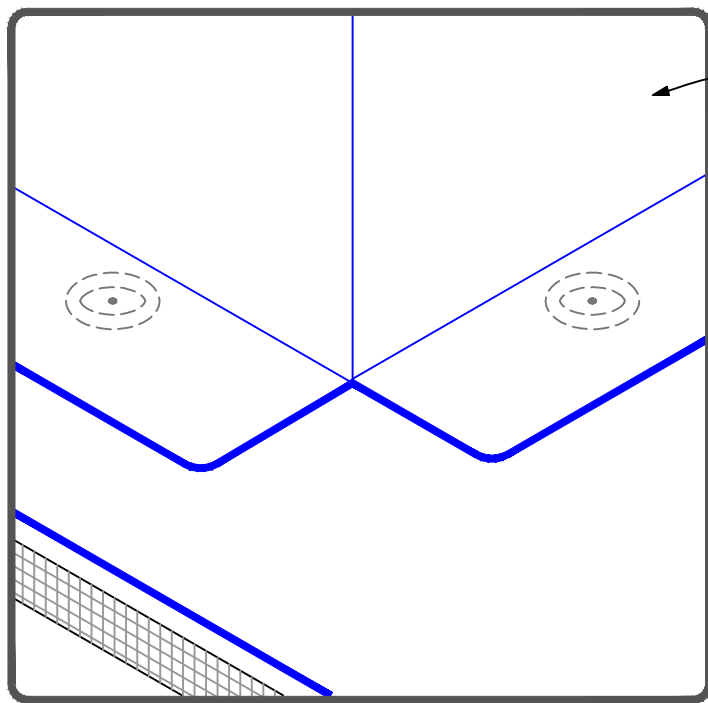


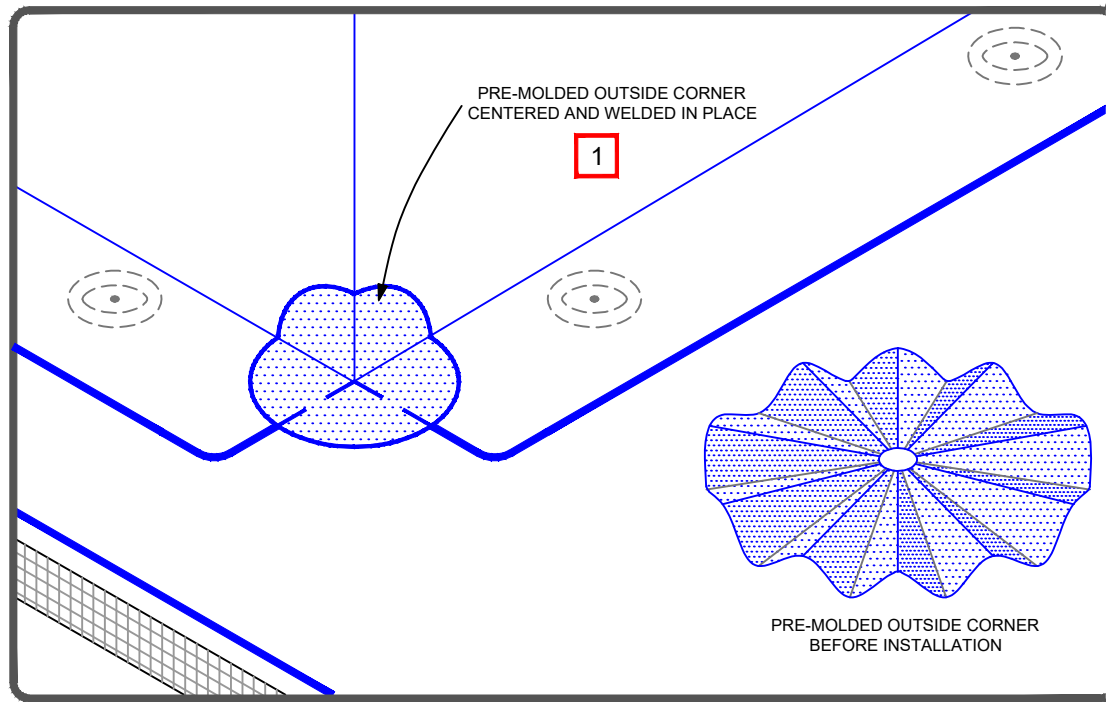

CURB OR WALL FLASHING W/ TPO
REINFORCED MEMBRANE



1 WELD THE OUTSIDE CORNER TO THE VERTICAL SURFACE FIRST.
THEN PROCEED WELDING TO THE DECK MEMBRANE.

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO PRE-MOLDED OUTSIDE CORNER FLASHING

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-CR-C701

REVISION DATE: 8/24/2026