


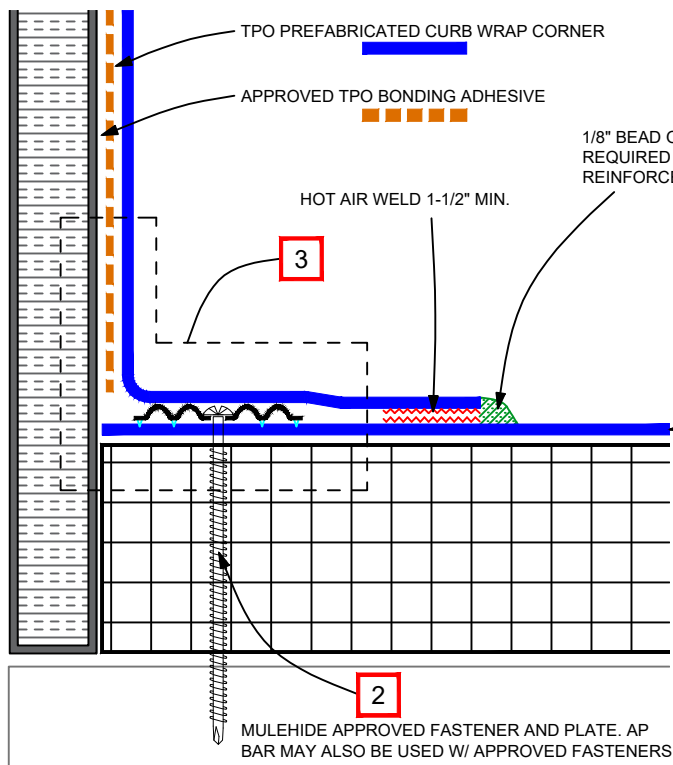

1/8" BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF REINFORCED TPO MEMBRANE


HOT AIR WELD 1-1/2" MIN.

3

2

MULEHIDE APPROVED FASTENER AND PLATE. AP BAR MAY ALSO BE USED W/ APPROVED FASTENERS

APPLICABLE FIELD MEMBRANES	
TPO REINFORCED	
TPO SELF-ADHERING	
TPO FLEECE BACK	

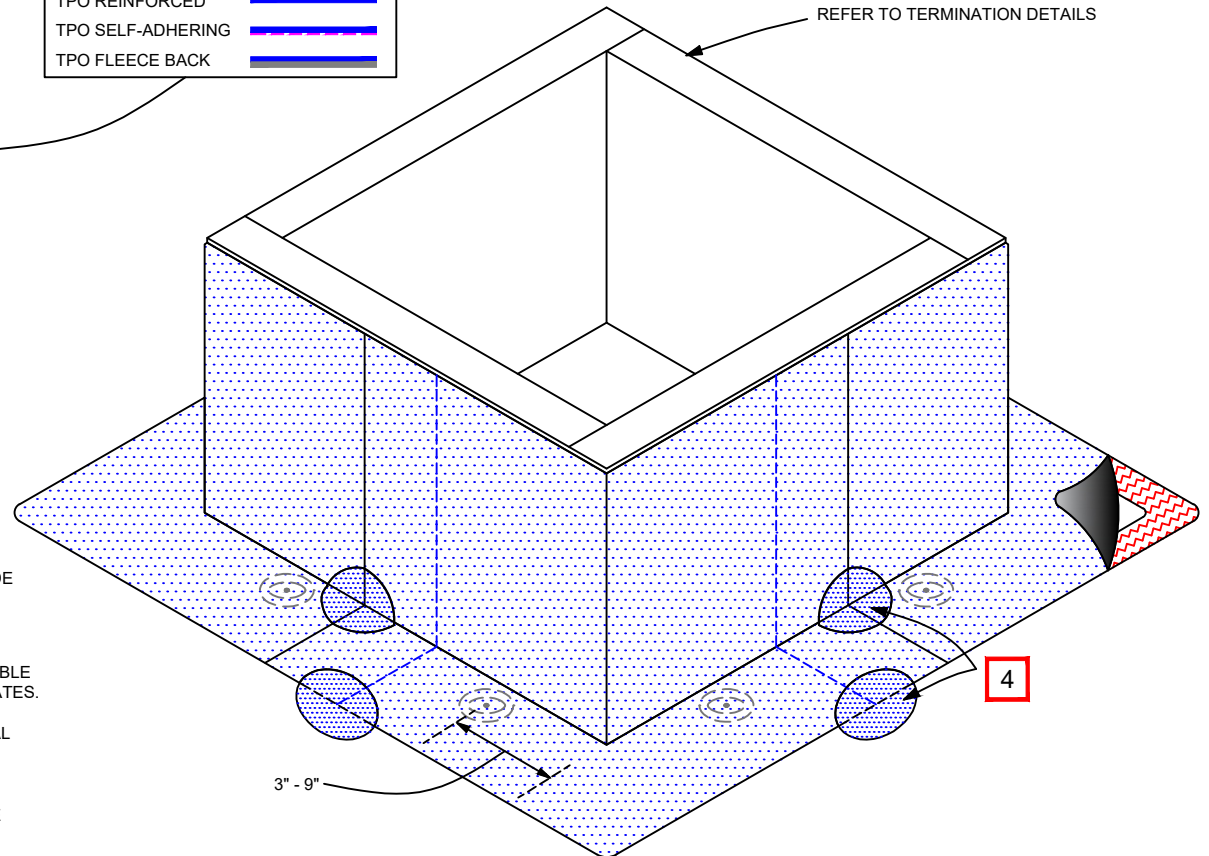

REFER TO TERMINATION DETAILS

4

3" - 9"

- 1 CURB WRAP CAN BE PREFABRICATED TO CUSTOM SIZES, AND CAN BE MADE FROM 1 PC (SPLIT OR CLOSED), 2 PC, OR 4 PC PREFABRICATIONS
- 2 EHD FASTENERS WITH 2.4" SEAM PLATES ARE APPROVED FOR WOOD, AND STEEL (18-22 GA.) SUBSTRATES. REFER TO SPECIFICATIONS FOR ACCEPTABLE PULLOUT VALUES, OR FOR OTHER FASTENERS AND COMPATIBLE SUBSTRATES.
- 3 REFERENCE "CURB OR WALL BASE ATTACHMENT" DETAILS FOR ADDITIONAL BASE ATTACHMENT OPTIONS.
- 4 T-JOINT SEAM INTERSECTIONS AND FIELD TO WALL TRANSITIONS REQUIRE T-JOINT PATCHES PER DETAIL **TP-WF-C201** OR **TP-WF-A200**

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)

TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO CURB FLASHING:
PREFABRICATED CURB WRAP CORNERS

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-CB-C219

REVISION DATE: 8/24/2026