
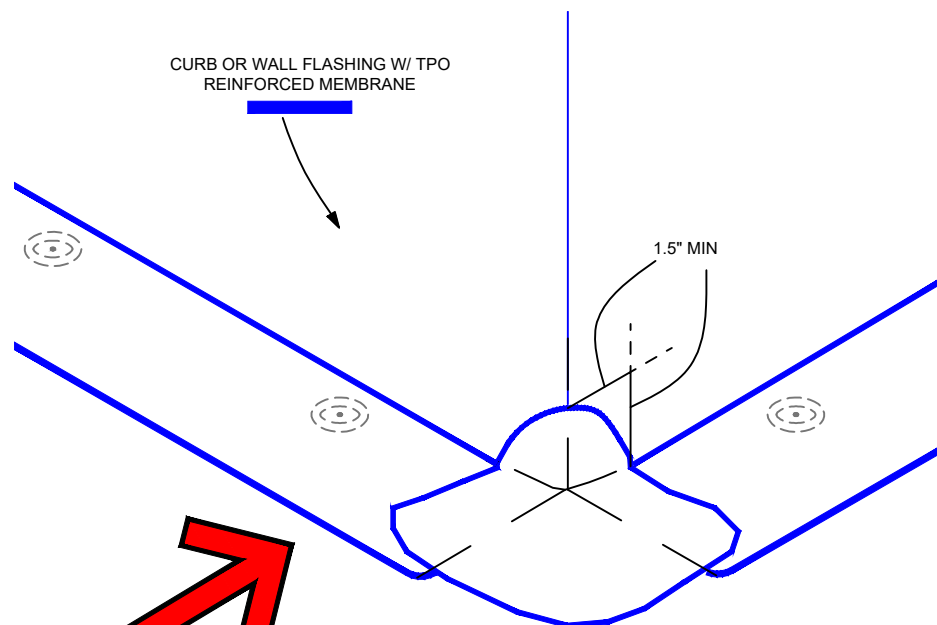

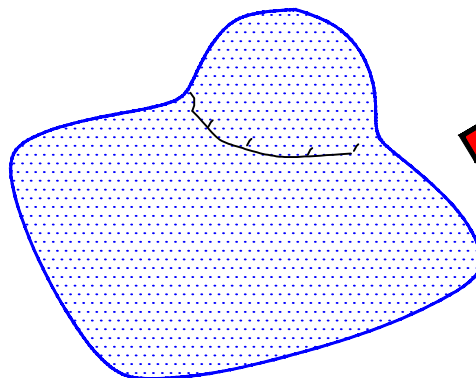



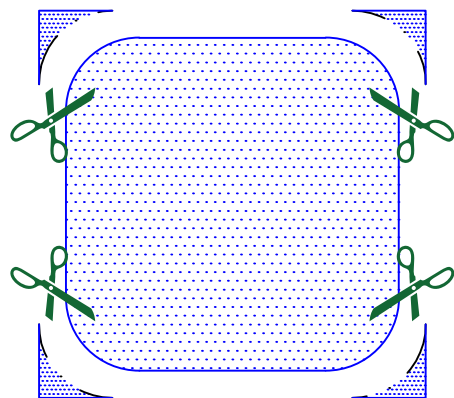

POSITION AND HEAT WELD THE CORNER INTO PLACE AS SHOWN. WELD THE OUTSIDE CORNER TO THE VERTICAL SURFACE FIRST. THEN PROCEED TO WELD TO THE DECK MEMBRANE.

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
 TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
 TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED)
 TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO FIELD FABRICATED OUTSIDE CORNER FLASHING

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
 ACCEPTABLE FOR : **MAXIMUM 20 YEAR WARRANTY**

DETAIL NO.:
TP-CR-A702

REVISION DATE: 8/24/2026