

1/8" BEAD OF CUT-EDGE SEALANT IS
REQUIRED ON CUT EDGES OF
REINFORCED TPO MEMBRANE

HOT AIR WELD
1-1/2" MIN.

WOOD NAILER (BY OTHERS). WOOD NAILER MUST
EXTEND PAST THE METAL FLANGE

1 FLASH OUTSIDE CORNERS PER THE FOLLOWING DETAILS


WARRANTY LENGTH	DETAIL NUMBER
20 YEAR	TP-CR-A702
25/30 YEAR	TP-CR-C700

1 IF OUTSIDE CORNER FLASHING IS NOT LARGE ENOUGH TO ACHIEVE A MIN. 1-1/2" WIDE WELD PAST THE METAL FLANGE IN ALL DIRECTIONS:

- REFER TO DETAIL **TP-CR-C710** FOR ADDITIONAL INSTRUCTION
OR
- FLASH THE CURB WITH PREFABRICATED CURB WRAP CORNERS
REFERENCED IN DETAIL **TP-CB-C218**.

2 CONSULT THE MANUFACTURER OF THE CURB FOR PROPER SECUREMENT

REFER TO TERMINATION DETAILS

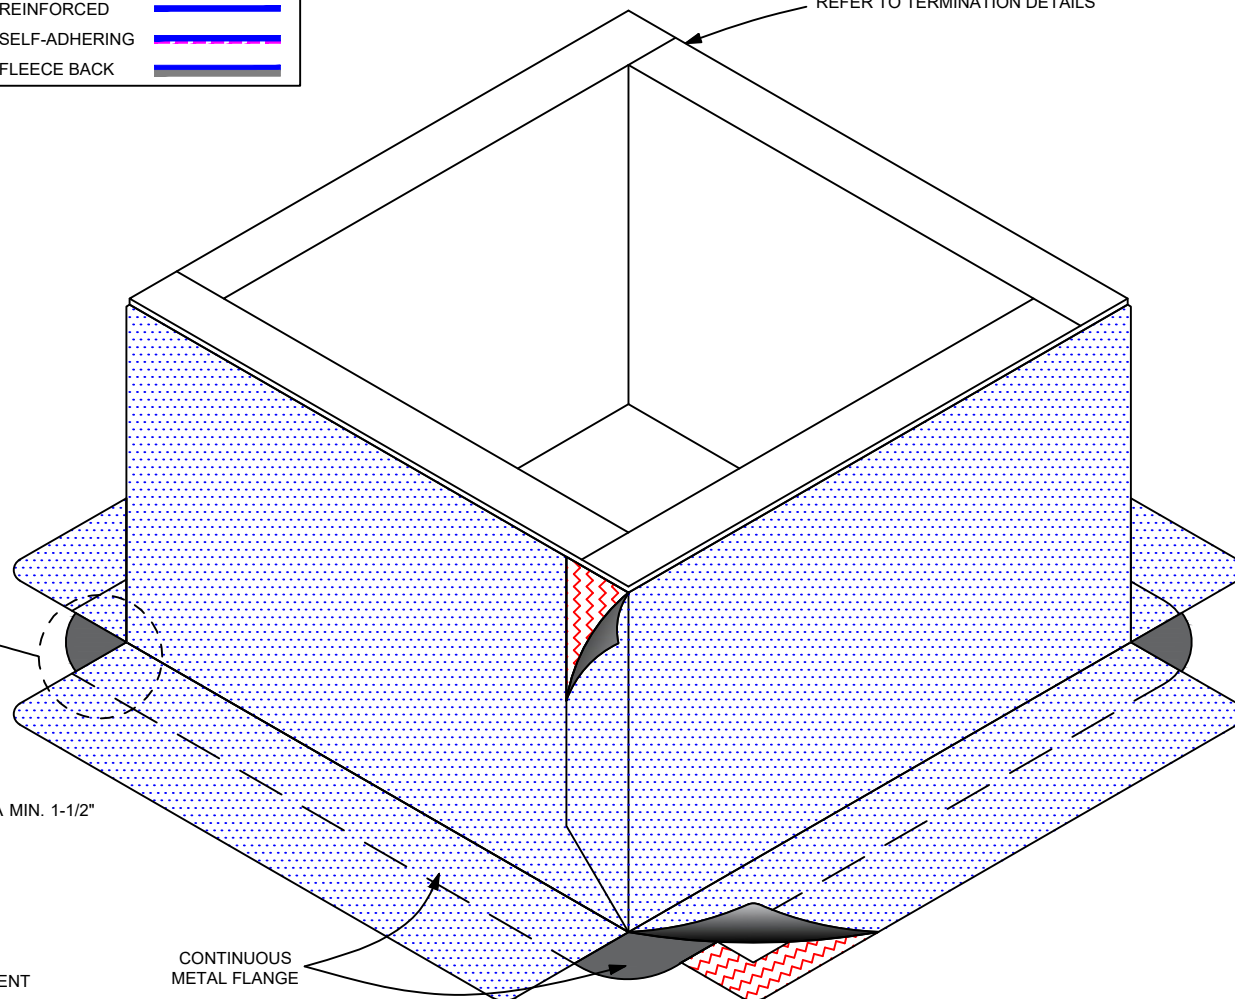

CONTINUOUS
METAL FLANGE

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)

TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO SELF-FLASHING CURB:
CURB FLANGE SET ON TOP OF FIELD MEMBRANE

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-CB-C217

REVISION DATE: 8/24/2026