


NOTES:

1. Cleaning and Preparation - Clean and prepare the surface by brooming mild detergent & water rinse or as required to remove any conditions that could adversely affect the adhesion of primers and liquid materials.
2. When applying the Sacrificial SA or Torch CAP Membrane, approved JTS-1 sealant or mastic (MH 421) will be selected based on the appropriate application method for the product type (e.g., self-adhered, heat welded, cold-applied, etc.).
3. Illustration and notations intended for generalized application only.
4. Cable pads to be applied in similar application.

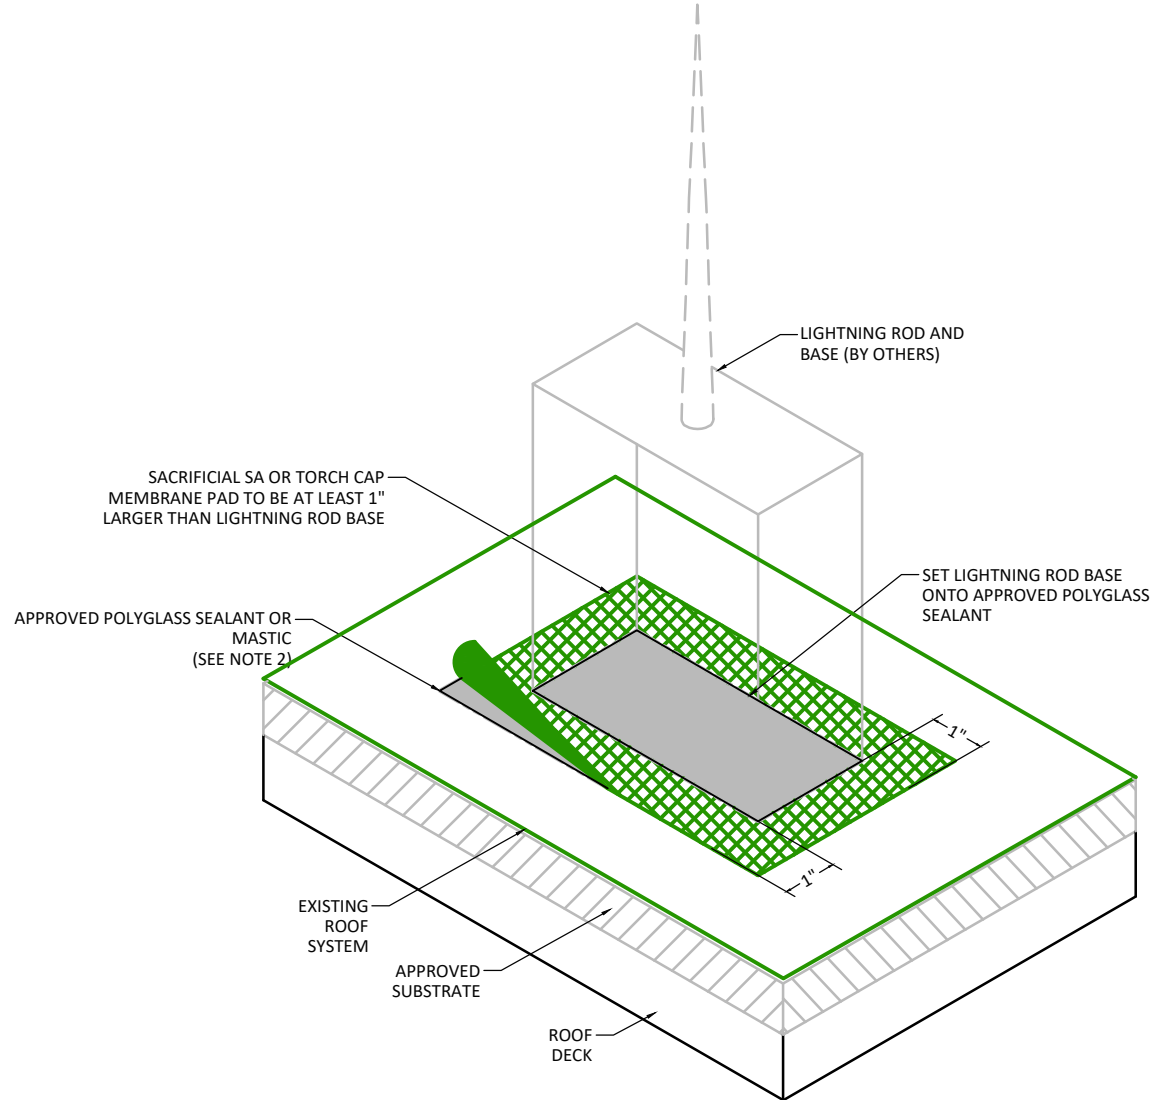

APPLICABLE SYSTEMS (AND MEMBRANES)
 SELF ADHERED
 TORCH APPLIED

MULEHIDE

LIGHTNING ROD BASE TYPICAL DETAIL

DETAIL NO.:
MB-MS-A800

MAXIMUM WARRANTY:
 20 YEARS MAX

REVISION DATE: 6/8/2026