



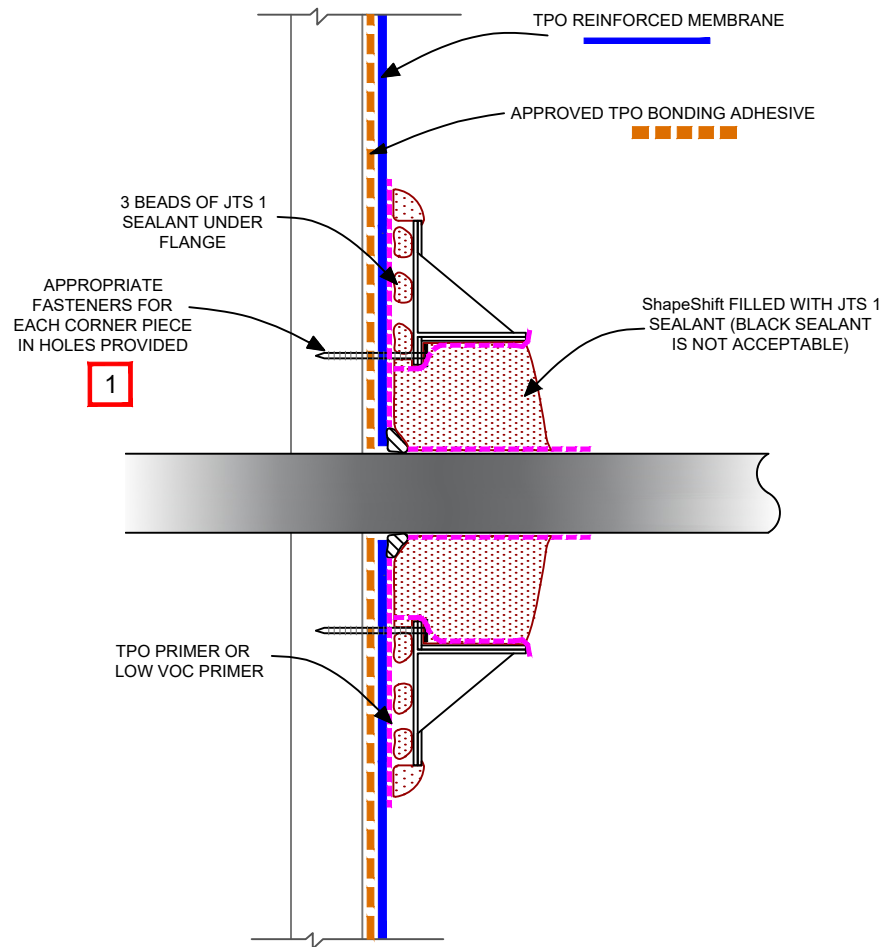

ShapeShift PITCH PANS CAN BE CONFIGURED TO ANY SHAPE NEEDED BY USING COMBINATIONS OF CORNER AND STRAIGHT PIECES

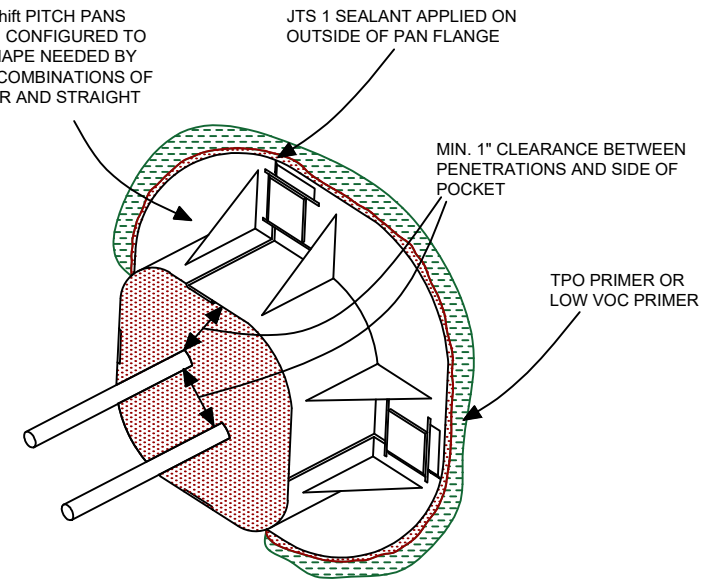

1 FASTENER MUST GO INTO A HARD SUBSTRATE LIKE PLYWOOD, OSB, CONCRETE, STEEL STRAPPING, ETC. FASTENING SOLELY INTO POLYISO OR GYPSUM COVERBOARDS IS NOT ACCEPTABLE.

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
 TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
 TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
 TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO: ShapeShift SEALANT POCKET ON VERTICAL

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-MS-C802

REVISION DATE: 8/24/2026