

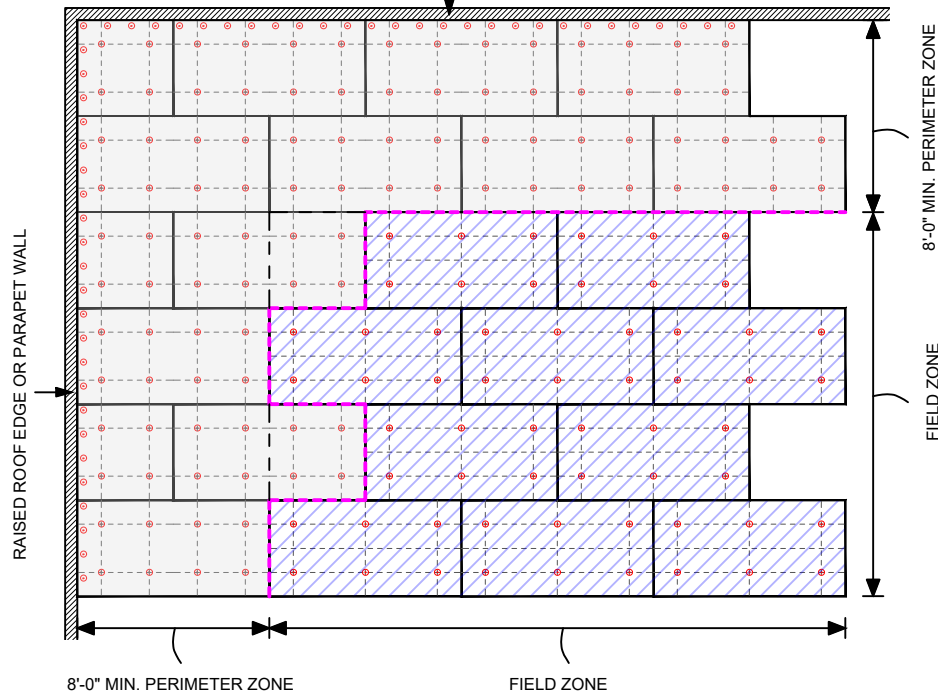


ADDITIONAL ATTACHMENT REQUIRED AT 12" O.C.  
MAX AT ANGLE(S) CHANGES. REFER TO DETAIL  
TP-WF-C206.

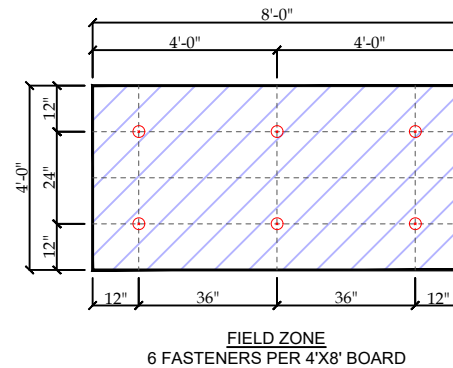

- 1 INDUCTION WELD CARDBOARD DISKS ARE REQUIRED UNDER INDUCTION WELDING PLATES WHEN USING NON-FACED EPS (EXPANDED POLYSTYRENE) OR XPS (EXTRUDED POLYSTYRENE) INSULATIONS.
- 2 ENHANCEMENTS ARE REQUIRED ON WARRANTED PROJECTS GREATER THAN 72 MPH WIND SPEED COVERAGE, OR BUILDING HEIGHTS OVER 50'. REFER TO SPECIFICATIONS.
- 3 EHD FASTENERS INDUCTION WELD PLATES ARE ACCEPTABLE FOR WOOD, AND STEEL (18 - 22 GA.) SUBSTRATES. REFER TO SPECIFICATIONS FOR ACCEPTABLE PULLOUT VALUES, OR FOR OTHER FASTENERS AND COMPATIBLE SUBSTRATES.
- 4 4'X12' POLYISO BOARDS SHALL BE FASTENED AT THE SAME OR GREATER RATE PER SQUARE FOOT. REFER TO 4'X12' POLYISO DETAILS
- 5 FOR FM, OR OTHER CODE-RELATED REQUIREMENTS, CONTACT MULEHIDE TECHNICAL.

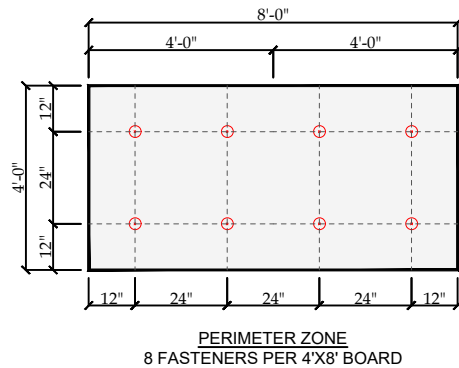

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)  
TPO REINFORCED (INDUCTION WELDED)

**MULEHIDE**

TPO INDUCTION WELDED SYSTEM LAYOUT (20 YEAR)

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS  
ACCEPTABLE FOR : **MAXIMUM 20 YEAR WARRANTY** 2

**DETAIL NO.:**

**TP-LO-A1111**

REVISION DATE: 8/24/2026