




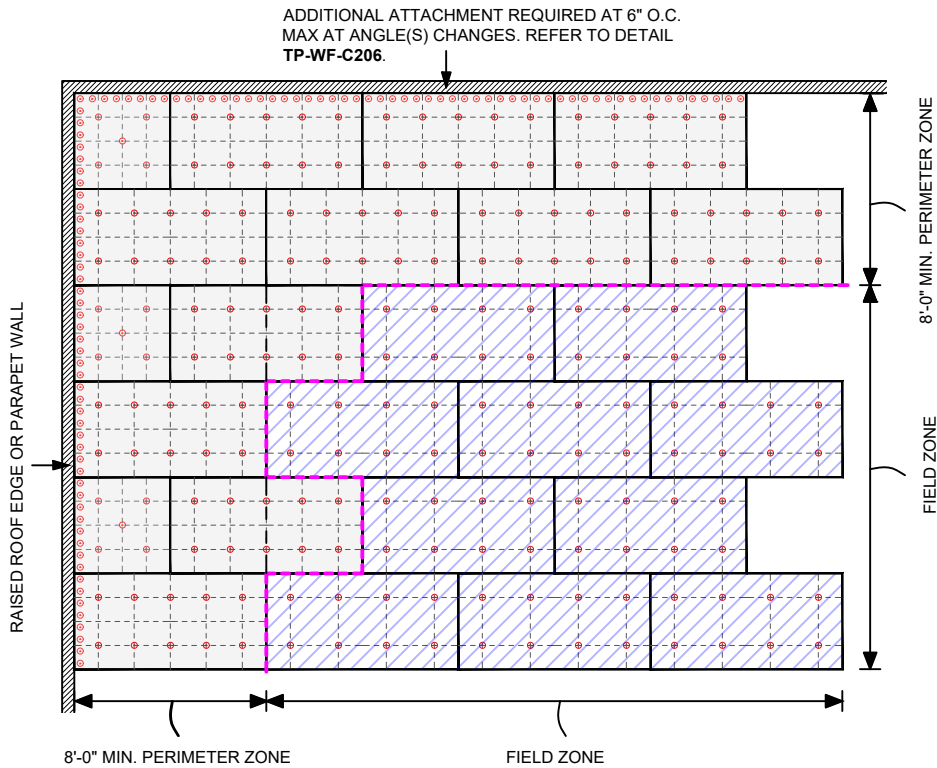


- 1 INDUCTION WELD CARDBOARD DISKS ARE REQUIRED UNDER INDUCTION WELDING PLATES WHEN USING NON-FACED EPS (EXPANDED POLYSTYRENE) OR XPS (EXTRUDED POLYSTYRENE) INSULATIONS.
- 2 ENHANCEMENTS ARE REQUIRED ON WARRANTED PROJECTS GREATER THAN 72 MPH WIND SPEED COVERAGE, OR BUILDING HEIGHTS OVER 50'. REFER TO SPECIFICATIONS.
- 3 EHD FASTENERS INDUCTION WELD PLATES ARE ACCEPTABLE FOR WOOD, AND STEEL (18 - 22 GA.) SUBSTRATES. REFER TO SPECIFICATIONS FOR ACCEPTABLE PULLOUT VALUES, OR FOR OTHER FASTENERS AND COMPATIBLE SUBSTRATES.
- 4 4'X12' POLYISO BOARDS SHALL BE FASTENED AT THE SAME OR GREATER RATE PER SQUARE FOOT. REFER TO 4'X12' POLYISO DETAILS
- 5 FOR FM, OR OTHER CODE-RELATED REQUIREMENTS, CONTACT MULEHIDE TECHNICAL.



PERIMETER ZONE 4'x4'
5 FASTENERS PER 4'X4' BOARD

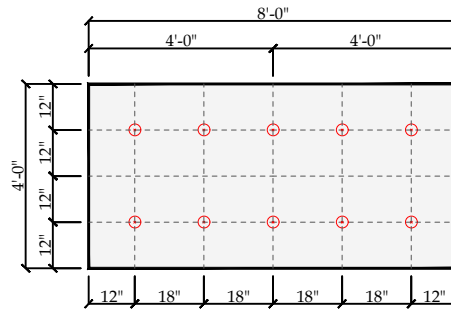

PERIMETER ZONE 4'x8'
10 FASTENERS PER 4'X8' BOARD

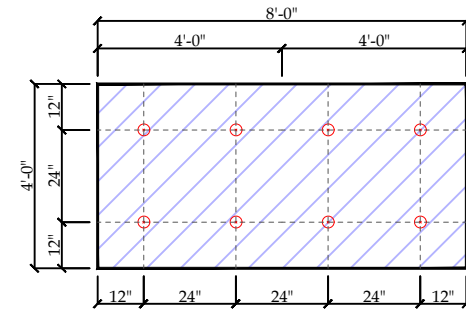

FIELD ZONE
8 FASTENERS PER 4'X8' BOARD

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (INDUCTION WELDED)

MULEHIDE

TPO INDUCTION WELDED SYSTEM LAYOUT (25/30 YEAR)

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY** 2

DETAIL NO.:

TP-LO-C1112

REVISION DATE: 8/24/2026