
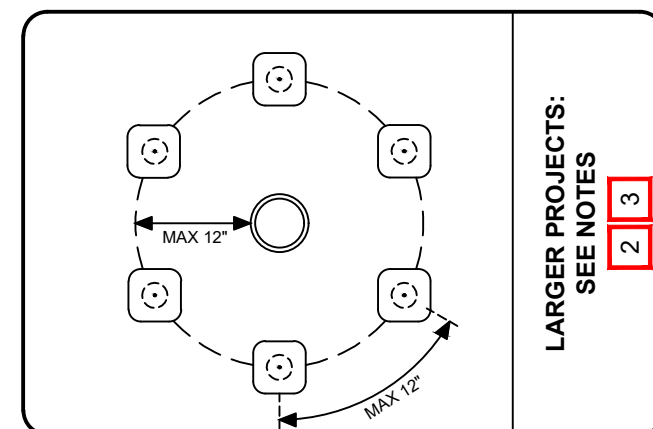
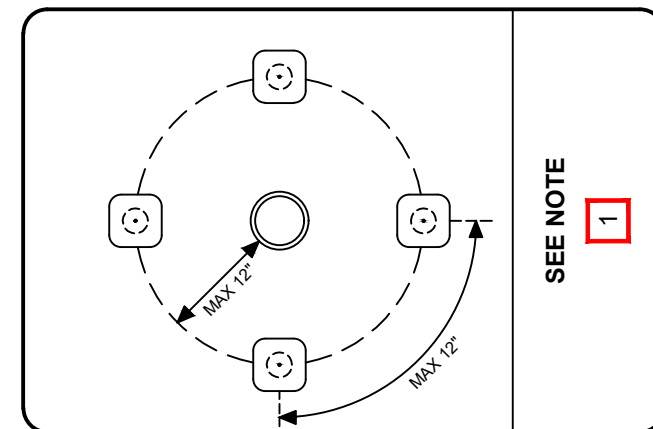


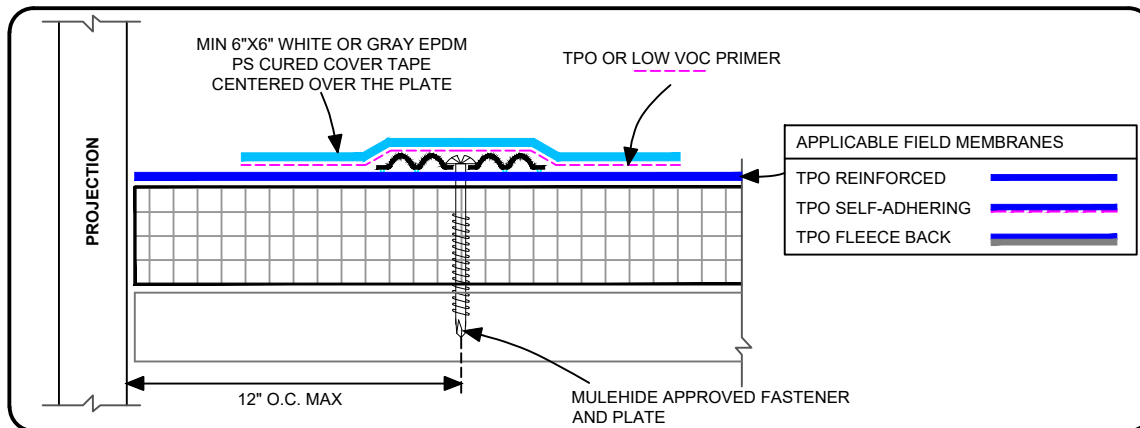

- 1** ON ALL MECHANICALLY ATTACHED AND INDUCTION WELDED SYSTEMS: INSTALL A MINIMUM OF 4 FASTENERS AND PLATES SPACED 12" ON CENTER MAX., AS SHOWN.
- 2** ON ALL MECHANICALLY ATTACHED AND INDUCTION WELDED SYSTEMS: LARGER PROJECTIONS WILL REQUIRE ADDITIONAL FASTENERS AND PLATES IN ORDER TO NOT EXCEED 12" ON CENTER MAX SPACING.
- 3** ON ADHERED SYSTEMS: FASTENERS AND PLATES ARE NOT REQUIRED UNLESS THE PROJECTION DIAMETER EXCEEDS 18".

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
 TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
 TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED)
 TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO: ADDITIONAL SECUREMENT AROUND PROJECTIONS
 W/ WHITE OR GRAY EPDM CURED COVER TAPE PATCH

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
 ACCEPTABLE FOR : **MAXIMUM 20 YEAR WARRANTY**

DETAIL NO.:
TP-PP-A519

REVISION DATE: 8/24/2026