



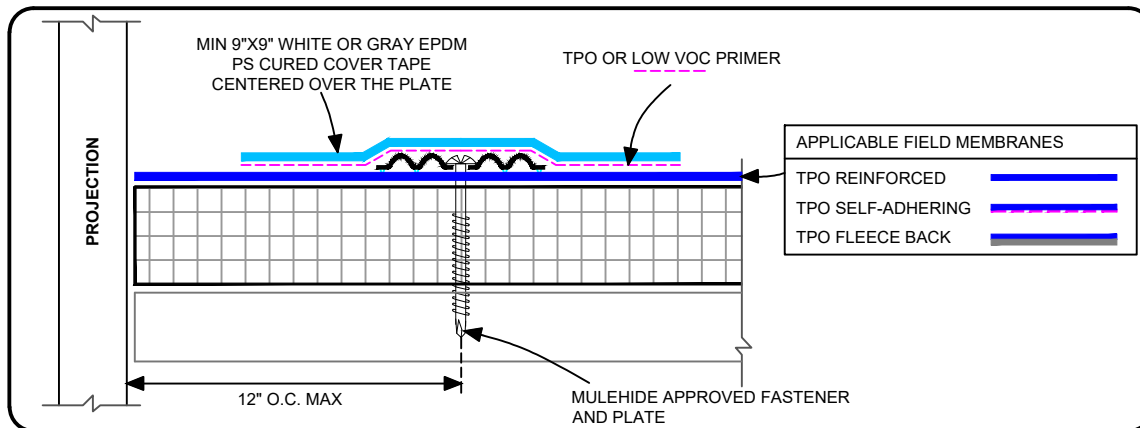


- 1** ON ALL MECHANICALLY ATTACHED AND INDUCTION WELDED SYSTEMS: INSTALL A MINIMUM OF 4 FASTENERS AND PLATES SPACED 12" ON CENTER MAX., AS SHOWN.
- 2** ON ALL MECHANICALLY ATTACHED AND INDUCTION WELDED SYSTEMS: LARGER PROJECTIONS WILL REQUIRE ADDITIONAL FASTENERS AND PLATES IN ORDER TO NOT EXCEED 12" ON CENTER MAX SPACING.
- 3** ON ADHERED SYSTEMS: FASTENERS AND PLATES ARE NOT REQUIRED UNLESS THE PROJECTION DIAMETER EXCEEDS 18".

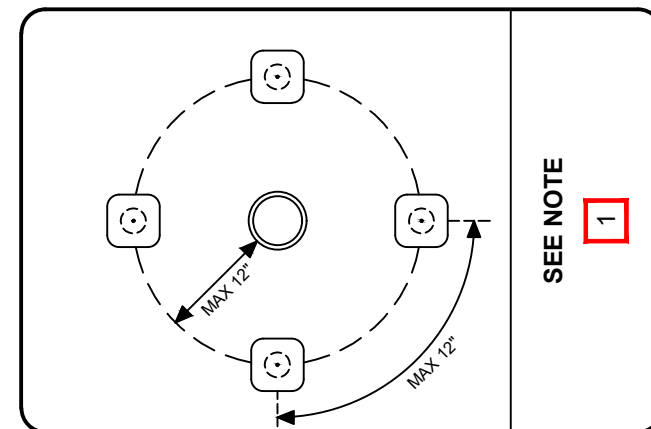

SEE NOTE

1

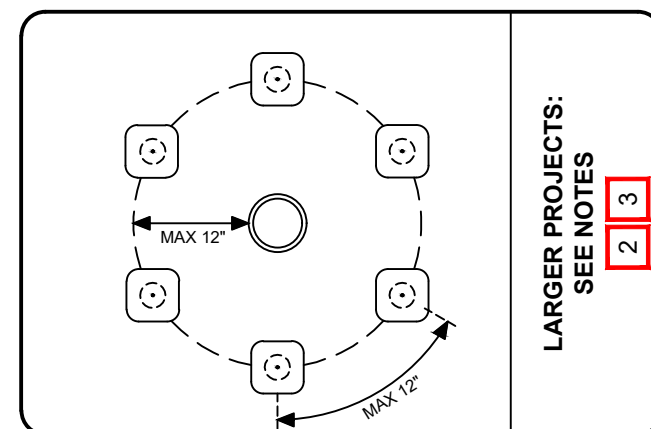

LARGER PROJECTIONS:
SEE NOTES

2 3

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED)
TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO: ADDITIONAL SECUREMENT AROUND PROJECTIONS
W/ WHITE OR GRAY EPDM CURED COVER TAPE PATCH

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 20 YEAR WARRANTY**

DETAIL NO.:
TP-PP-A519

REVISION DATE: 10/15/2026