


REFER TO DRIP EDGE DETAILS AND OPTIONS, AND FOR
ADDITIONAL INSTALLATION AND FASTENING REQUIREMENTS


APPROVED TOP LAYER UNDERLAYMENT

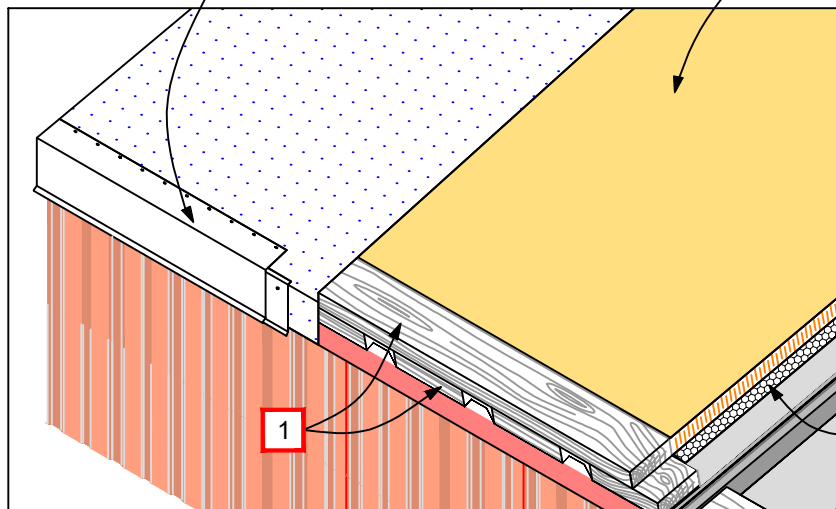

- AT LEAST 2 LAYERS OF WOOD NAILERS INSTALLED
- BOTTOM LAYER FLUSH W TOP OF METAL STANDING SEAMS
 - TOP LAYER FLUSH W/ TOP OF UNDERLAYMENT

REFER TO DRIP EDGE DETAILS
AND OPTIONS, AND FOR
ADDITIONAL INSTALLATION AND
FASTENING REQUIREMENTS

APPLICABLE FIELD
MEMBRANES LISTED
BELOW

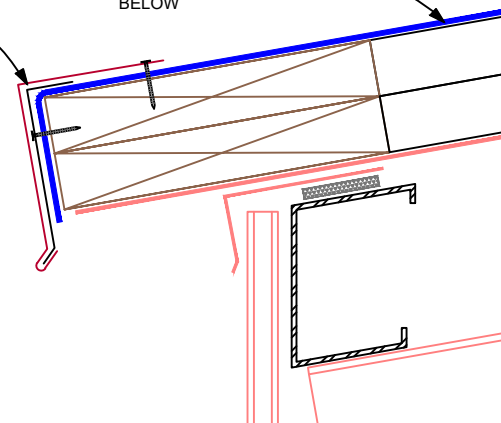

BOTTOM LAYER
FLUTE FILL BETWEEN
STANDING SEAMS

1 WOOD NAILERS (BY OTHERS) MUST BE SECURELY FASTENED. FACTORY MUTUAL'S PROPERTY LOSS PREVENTION DATA SHEET 1-49 IS A REFERENCE FOR SECUREMENT CRITERIA.

2 MECHANICALLY ATTACHED METAL RETROFIT SYSTEMS W/ FIELD MEMBRANE ATTACHED TO PURLINS ARE APPROVED FOR WARRANTIES UP TO 30 YEARS. REFER TO DETAILS **TP-LO-C1108**, **TP-LO-C1109**, **TP-LO-C1110**. ALL OTHER METAL RETROFIT SYSTEM OPTIONS ARE LIMITED TO 20 YEAR MAX.

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED)
TPO FLEECE BACK (ADHERED)
TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO METAL RETROFIT: EAVE CONDITION WITH
DRIP EDGE (WITHOUT GUTTER)

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY** **2**

DETAIL NO.:
TP-EM-C122

REVISION DATE: 8/24/2026