


APPLICABLE FIELD MEMBRANES	
TPO REINFORCED	
TPO SELF-ADHERING	
TPO FLEECE BACK	


FIGURE A

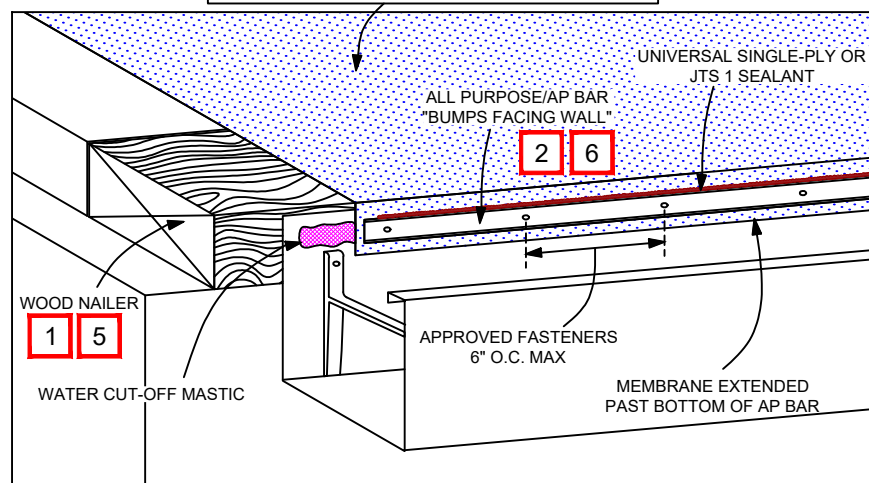


- 1** WOOD NAILERS (BY OTHERS) MUST BE SECURELY FASTENED. FACTORY MUTUAL'S PROPERTY LOSS PREVENTION DATA SHEET 1-49 IS A REFERENCE FOR SECUREMENT CRITERIA.
- 2** SPACE ALL PURPOSE BAR 1/4" BETWEEN ADJOINING SECTIONS
- 3** APPROX. 1/8" BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF TPO REINFORCED MEMBRANE
- 4** EHD OR HDP FASTENERS ARE ACCEPTABLE W/ WOOD SUBSTRATE
- 5** SUPPLEMENTAL WOOD NAILER CONDITIONS OCCUR ON METAL RETROFITS: REFER TO APPLICABLE DETAILS **TP-EM-C121**, **TP-EM-C122**, **TP-EM-C125**, OR **TP-EM-C126**
- 6** MULEHIDE TB-75, TB-90, OR TB-125 MY ALSO BE USED WITH SEALANT LEDGE FACING AWAY FROM WALL

FIGURE A - OPTIONS W/ TPO FLEECE BACK MEMBRANE

TPO FLEECE BACK W/ SELVAGE EDGE ALONG PERIMETER

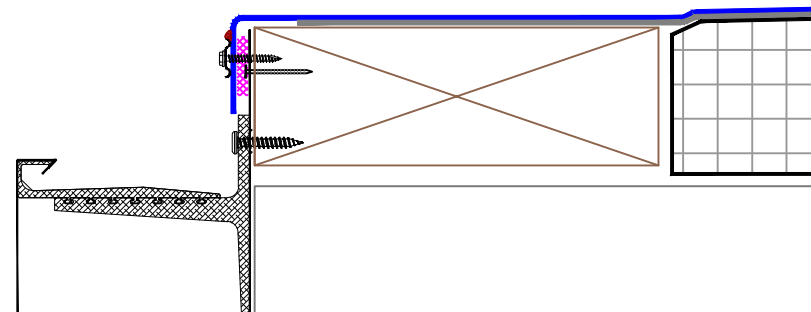

TPO FLEECE BACK W/ TPO REINFORCED MEMBRANE STRIP WELDED ON EDGE

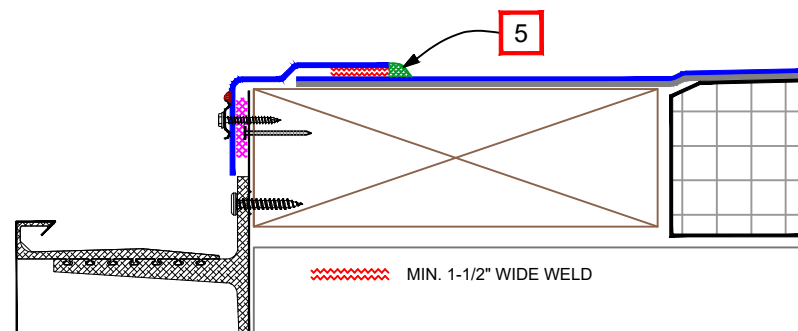

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO : MULEHIDE AP BAR AT GUTTER

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-EM-C127

REVISION DATE: 8/24/2026