
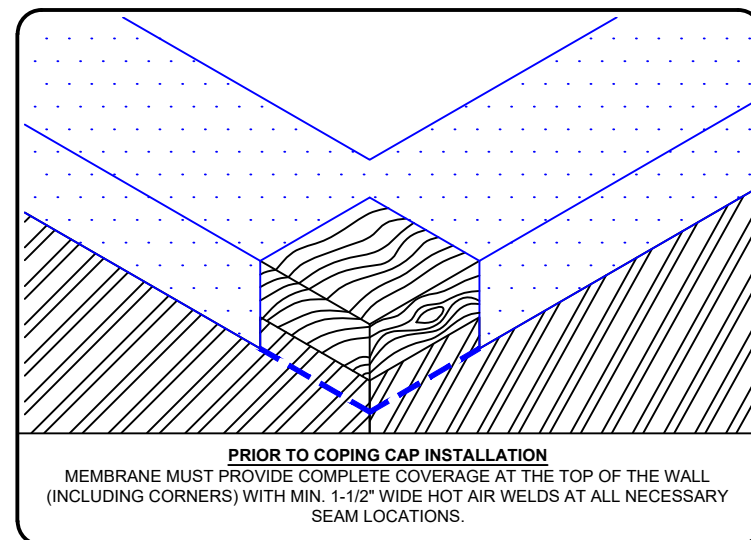


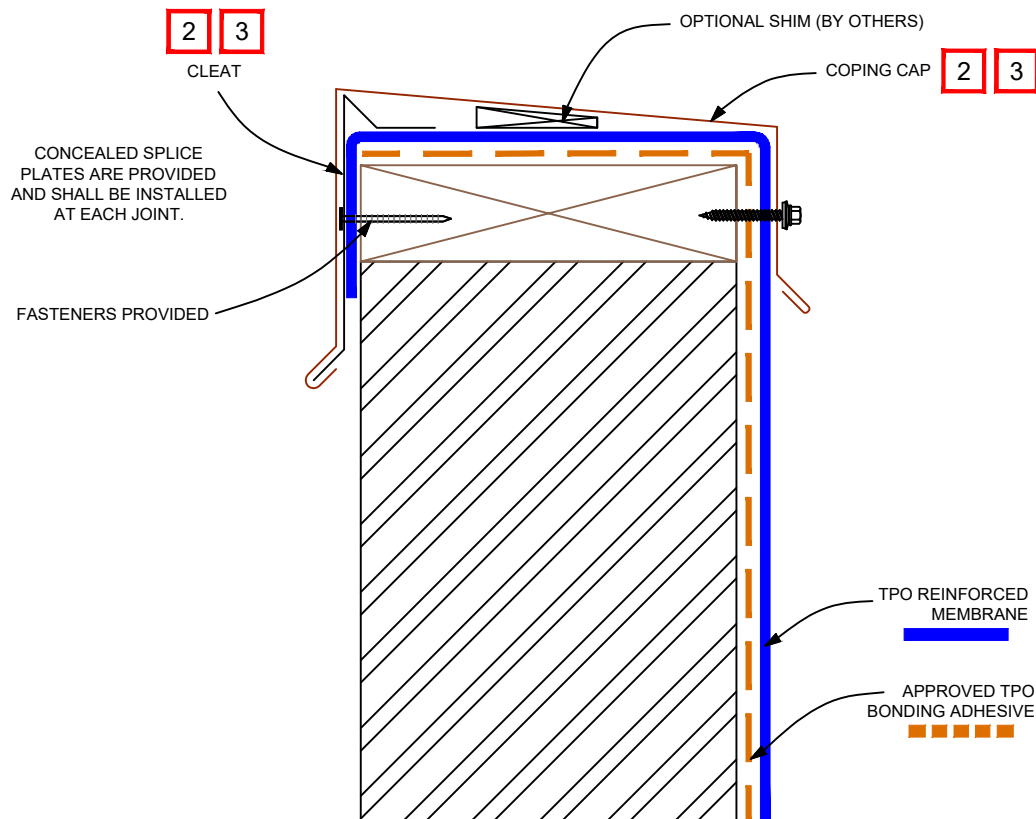

- 1 WOOD NAILERS (BY OTHERS) MUST BE SECURELY FASTENED. FACTORY MUTUAL'S PROPERTY LOSS PREVENTION DATA SHEET 1-49 IS A REFERENCE FOR SECUREMENT CRITERIA.
- 2 USE FASTENERS PROVIDED WITH MULEHIDE COPING METAL
- 3 VARIOUS COPING OPTIONS AND PROFILES ARE AVAILABLE FROM MULEHIDE. REFER TO THE APPROPRIATE INSTALLATION GUIDE FOR SPECIFIC STEP BY STEP INSTALLATION PROCEDURES AND ATTACHMENT REQUIREMENTS.

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
 TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
 TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
 TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO: MULEHIDE COPING EDGE METAL

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
 ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-EM-C118

REVISION DATE: 8/24/2026