
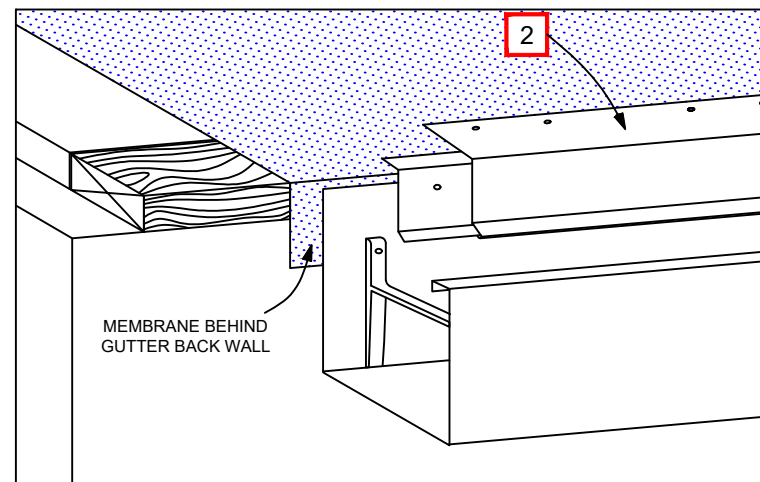


APPLICABLE FIELD MEMBRANES	
TPO REINFORCED	
TPO SELF-ADHERING	
TPO FLEECE BACK	

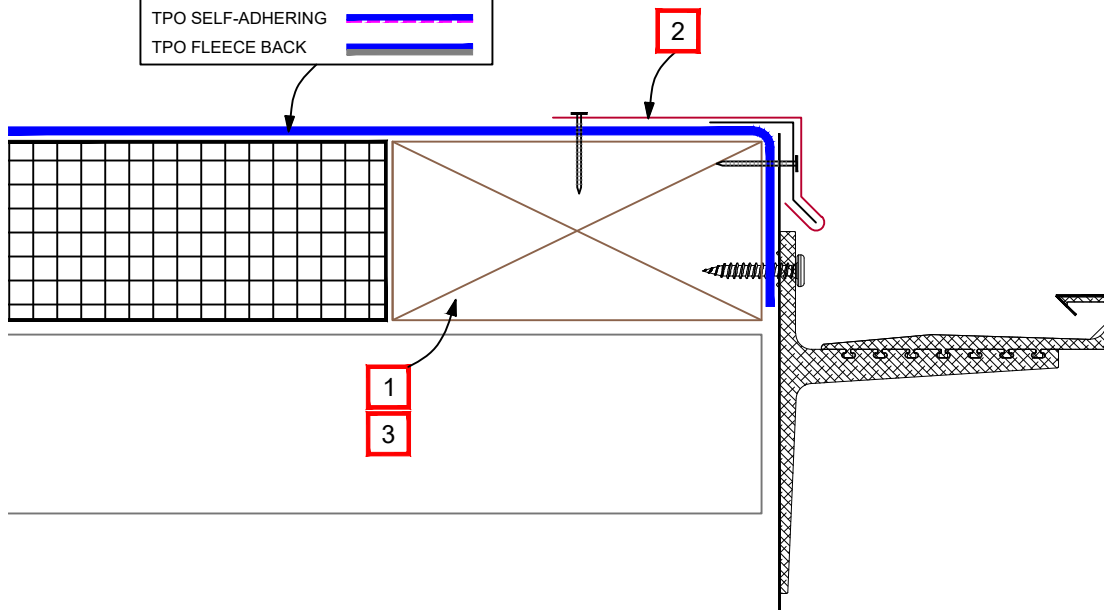

- 1** WOOD NAILERS (BY OTHERS) MUST BE SECURELY FASTENED. FACTORY MUTUAL'S PROPERTY LOSS PREVENTION DATA SHEET 1-49 IS A REFERENCE FOR SECUREMENT CRITERIA.
- 2** REFER TO DRIP EDGE DETAILS FOR OPTIONS, AND FOR ADDITIONAL INSTALLATION AND FLASHING REQUIREMENTS
- 3** SUPPLEMENTAL WOOD NAILER CONDITIONS OCCUR ON METAL RETROFITS: REFER TO APPLICABLE DETAILS **TP-EM-C121, TP-EM-C122, TP-EM-C125, OR TP-EM-C126**

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO : MULEHIDE DRIP EDGE AT GUTTER

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-EM-C108

REVISION DATE: 8/24/2026