

ACCEPTABLE
THREADED NAIL OR
FASTENER 12" O.C. MAX

CURB UNIT CAP BY OTHERS

WHEN CURB UNIT CAP (BY OTHERS) IS FASTENED AS SHOWN,
APPLY EXTERIOR GRADE SEALANT TO THE FASTENER HEADS
IF NEOPRENE/RUBBER WASHERS WERE NOT USED


TPO REINFORCED MEMBRANE

APPROVED TPO BONDING ADHESIVE

2

1 WALL FLASHING HEIGHT MUST BE A MINIMUM OF 8" HIGH WHEN
POSSIBLE

2 BONDING ADHESIVE IS NOT REQUIRED IF THE WALL FLASHING HEIGHT IS 12" OR LESS

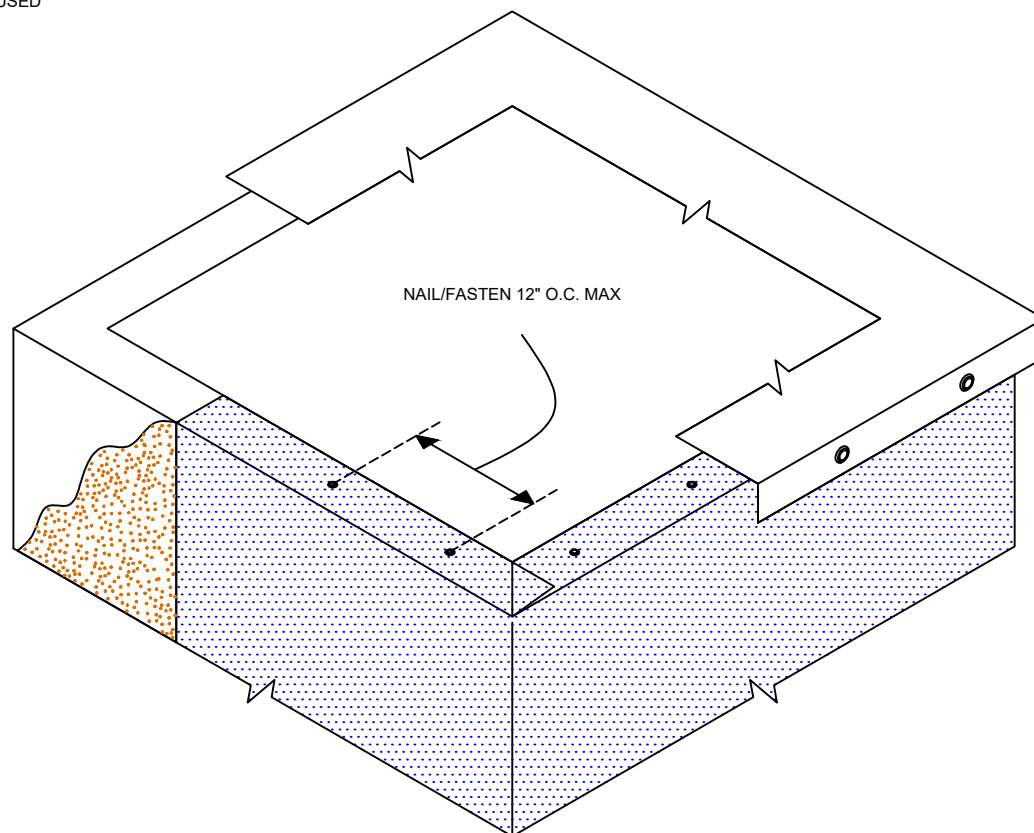

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)

TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)

TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)

TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO CURB TERMINATION W/ MEMBRANE UP AND OVER

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:

TP-TM-C601

REVISION DATE: 8/24/2026