
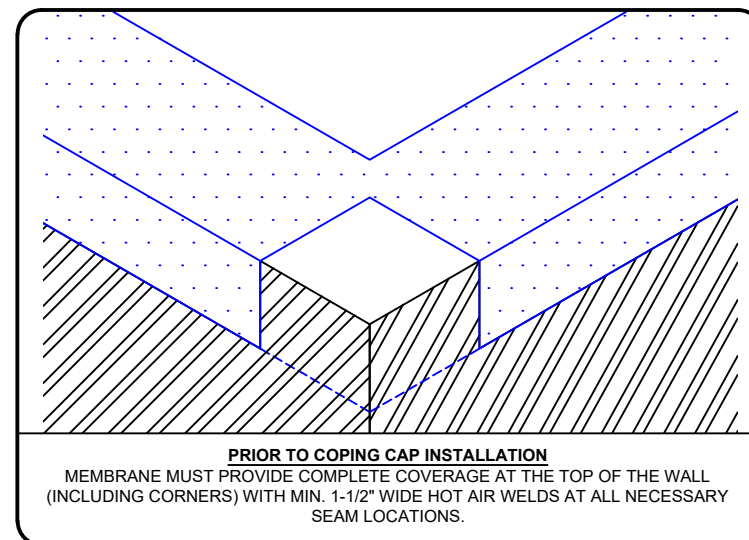


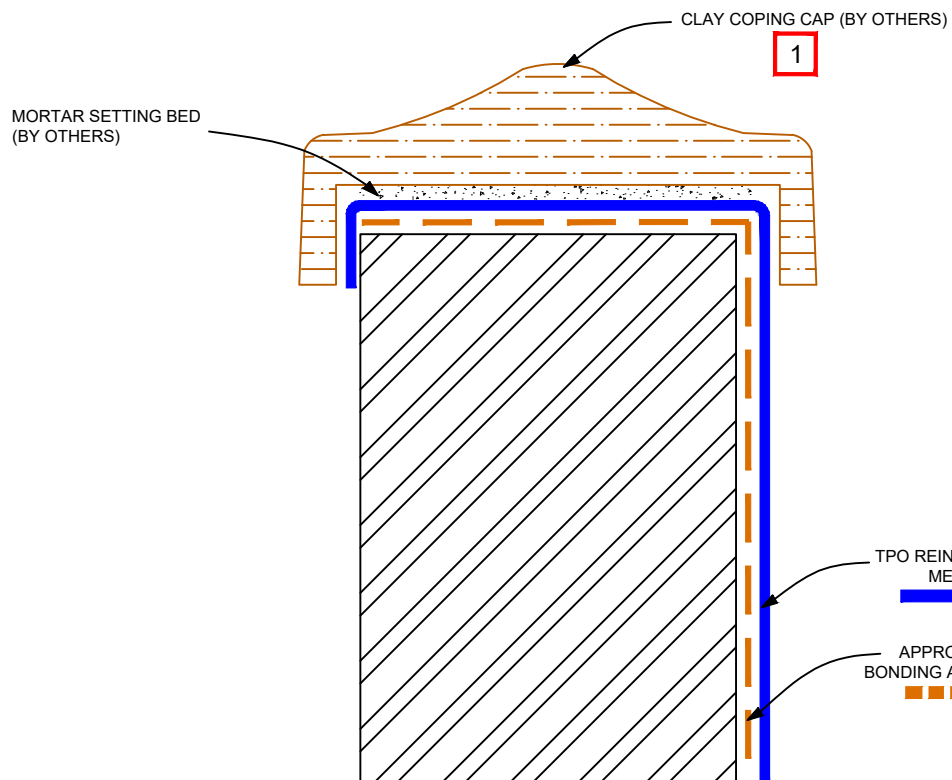

1 ADJOINING SECTIONS OF CLAY COPING MUST BE SEALED

2 APPLY NON-REINFORCED TPO CORNER FLASHING AT INTERIOR CORNER PER APPLICABLE CORNER DETAILS

3 BONDING ADHESIVE IS NOT REQUIRE IF THE WALL FLASHING HEIGHT IS 18" OR LESS

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO PARAPET TERMINATION W/ CLAY COPING CAP

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-TM-C609

REVISION DATE: 8/24/2026