
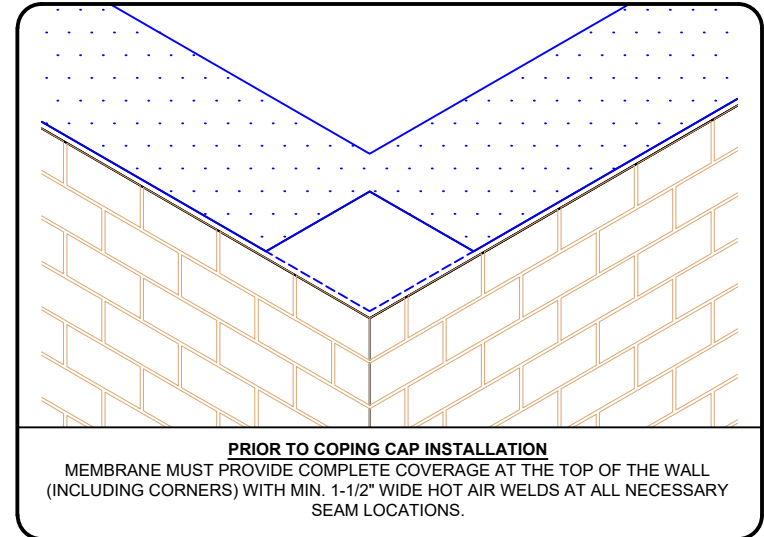


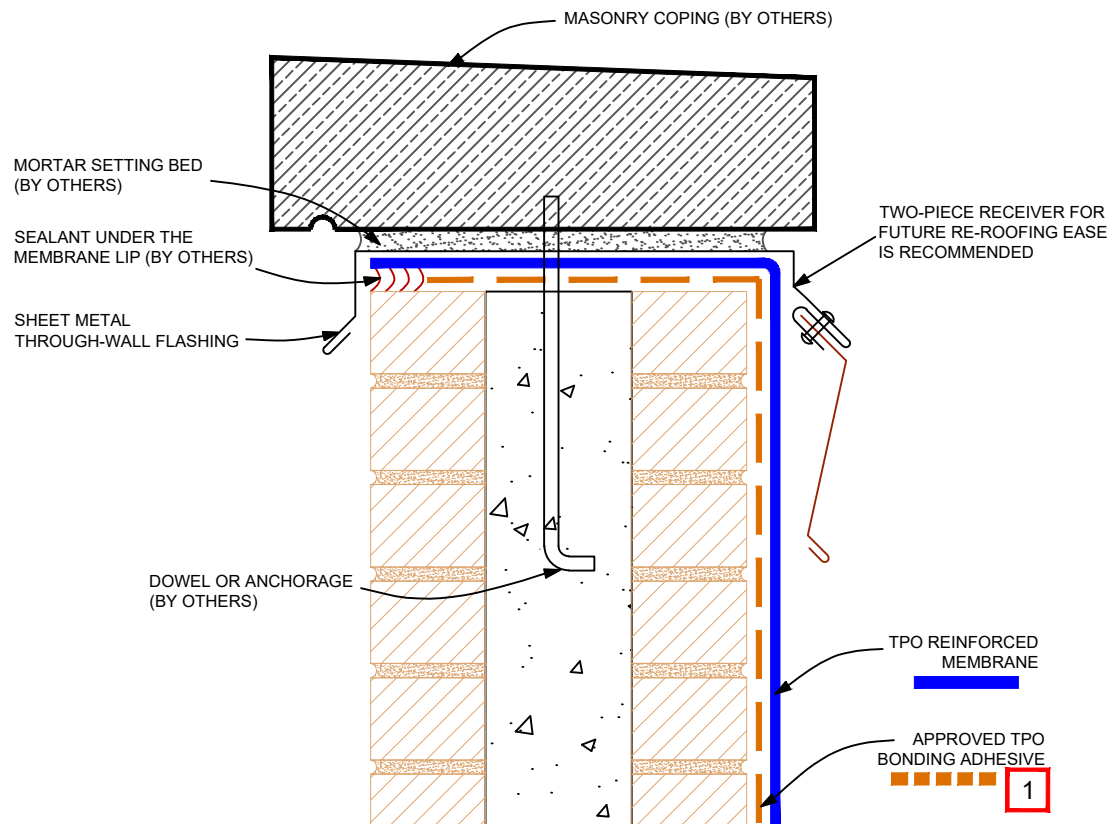

1 BONDING ADHESIVE IS NOT REQUIRED IF THE WALL FLASHING HEIGHT IS 18" OR LESS

2 APPLY NON-REINFORCED TPO CORNER FLASHING AT INTERIOR CORNER PER APPLICABLE CORNER DETAILS

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO PARAPET TERMINATION W/ MASONRY COPING CAP

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-TM-C608

REVISION DATE: 8/24/2026