
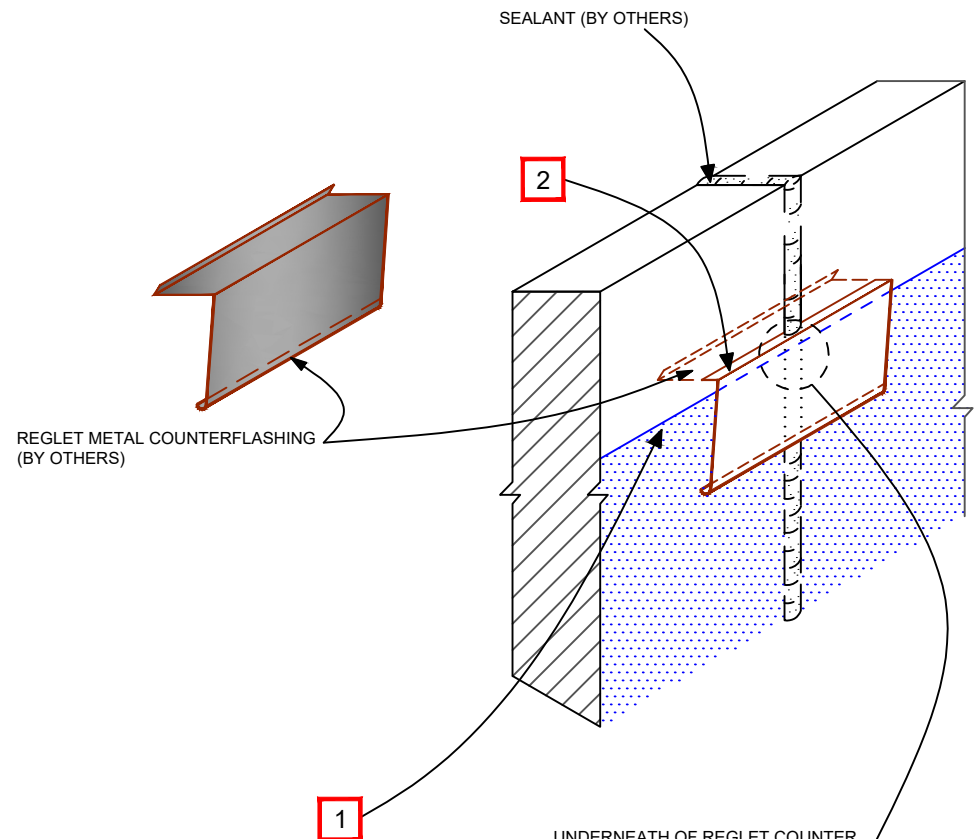


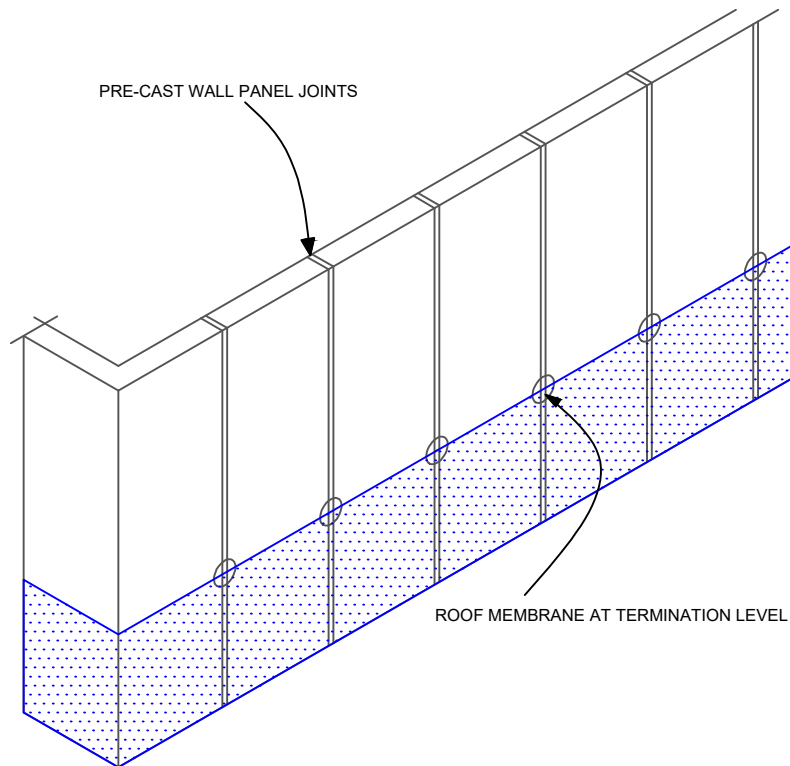

- 1** TERMINATION DETAIL USED "UNDERNEATH" THE REGLET METAL COUNTER FLASHING WILL VARY BASED ON THE PROJECT WARRANTY LENGTH. REFER TO THE FOLLOWING TERMINATION DETAILS
- 10 YEAR - DETAIL **TP-TM-F603**
 - 20 YEAR - DETAIL **TP-TM-A604**
 - 25/30 YEAR - DETAIL **TP-TM-C605**

- 2** HIGH GRADE EXTERIOR SEALANT BY OTHERS TO BE APPLIED TO THE TOP OF THE REGLET COUNTER FLASHING.

UNDERNEATH OF REGLET COUNTER FLASHING, STOP ALL PURPOSE BAR OR "SURFACE MOUNTED" COUNTER FLASHING WITHIN 1" OF THE VERTICAL JOINT TO ALLOW FOR EXPANSION/CONTRACTION.

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
 TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
 TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
 TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO WALL TERMINATION AT PRE-CAST WALL PANEL JOINTS

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY** **1**

DETAIL NO.:
TP-TM-C607

REVISION DATE: 8/24/2026