
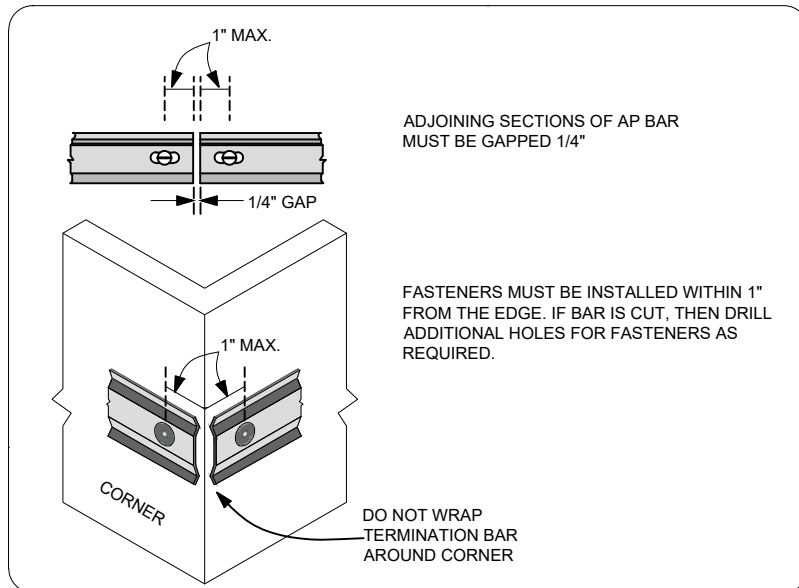
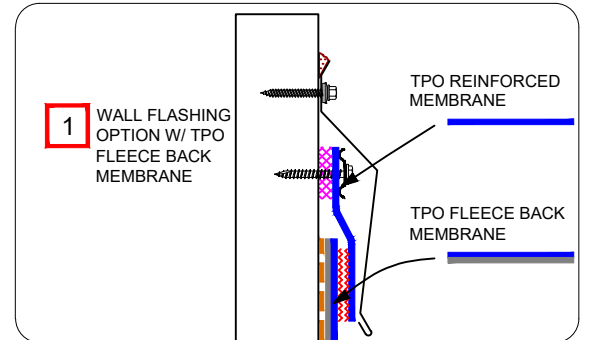
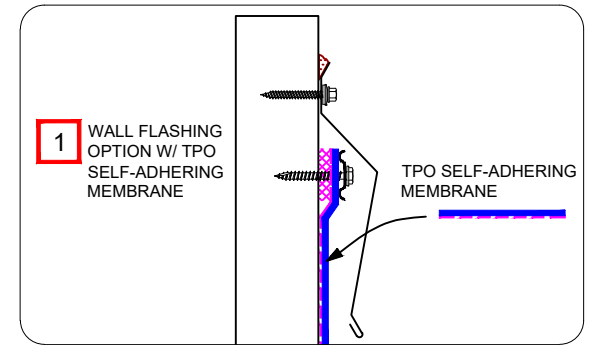


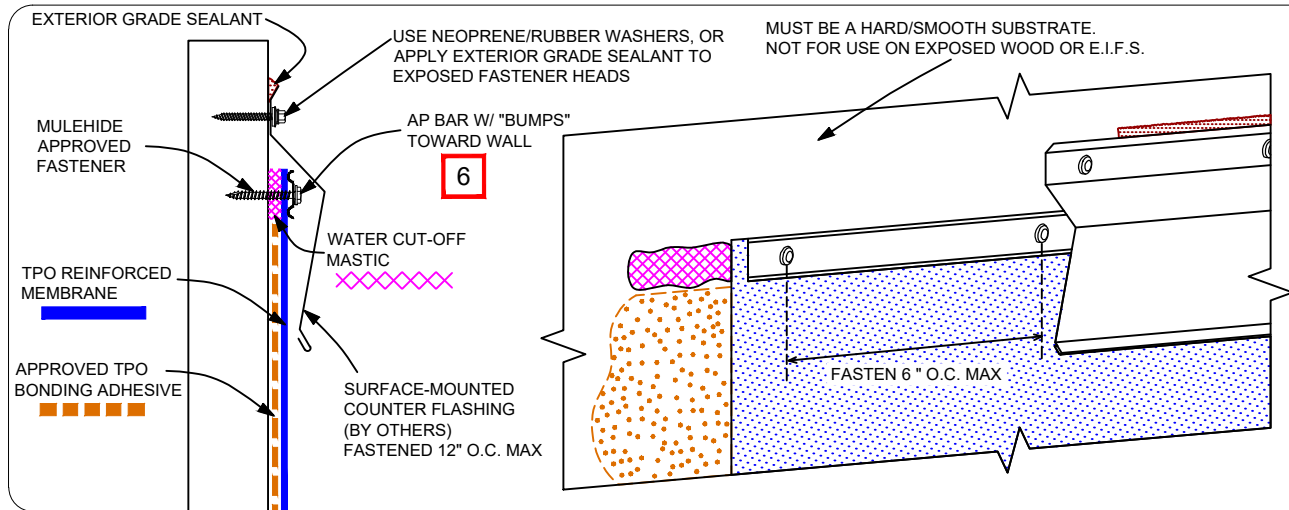

- 1 TPO REINFORCED MEMBRANE MAY ALSO BE USED AS WALL FLASHING ON PROJECTS WITH TPO FLEECE BACK OR SELF-ADHERING FIELD MEMBRANE
- 2 WALL FLASHING HEIGHT MUST BE A MINIMUM OF 8" HIGH WHEN POSSIBLE
- 3 BONDING ADHESIVE IS NOT REQUIRED IF THE WALL FLASHING HEIGHT IS 18" OR LESS
- 4 IF VERTICAL JOINTS (CONTROL JOINTS) ARE PRESENT, REFER TO DETAIL **TP-TM-C607** FOR ADDITIONAL REQUIREMENTS.
- 5 WHEN THE SUBSTRATE IS CONCRETE, SMOOTH BRICK, OR BLOCK MASONRY, THEN NAIL-DRIVE ZAMAC FASTENERS W/ CARBON STEEL DRIVE NAILS ARE APPROVED
- 6 TB-75, TB-90, OR TB-125 MAY ALSO BE USED W/ SEALANT LEDGE FACING AWAY FROM WAY

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
 TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
 TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
 TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO WALL TERMINATION UP TO 30 YEAR WARRANTY

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
 ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-TM-C605

REVISION DATE: 8/24/2026