
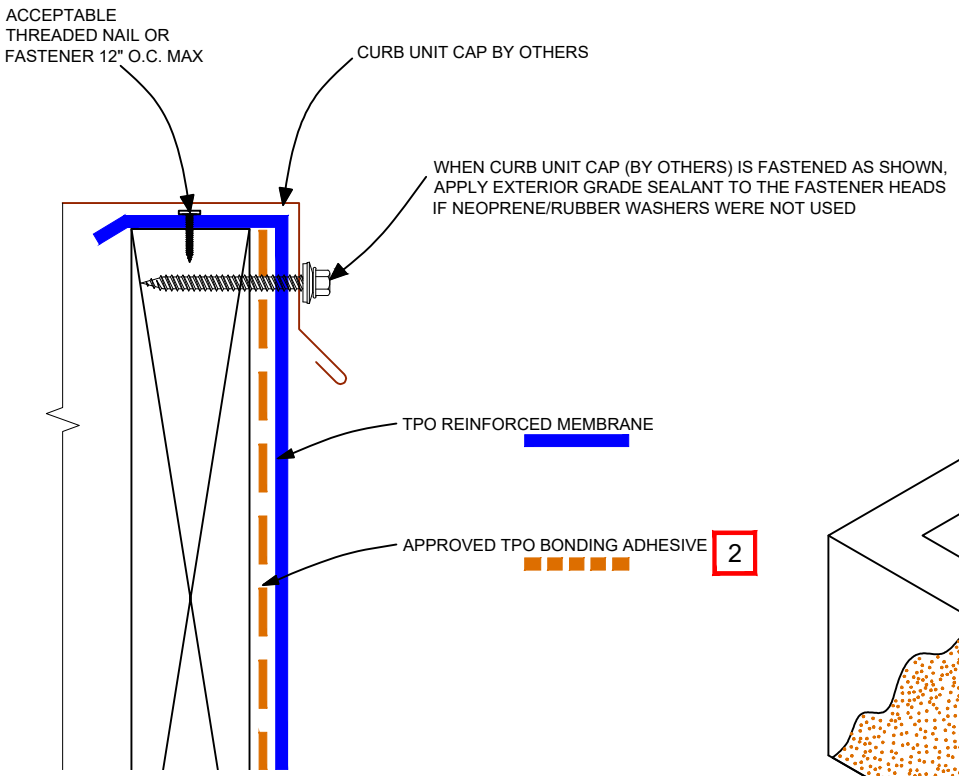


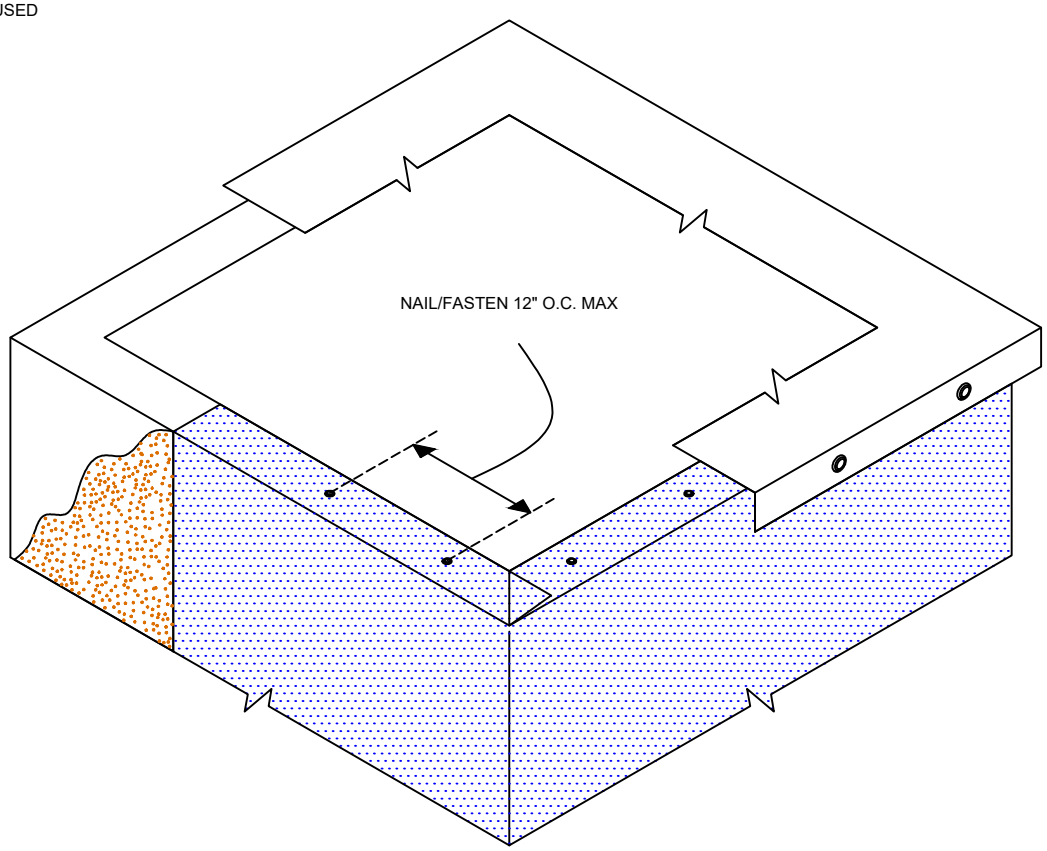

1 WALL FLASHING HEIGHT MUST BE A MINIMUM OF 8" HIGH WHEN POSSIBLE

2 BONDING ADHESIVE IS NOT REQUIRED IF THE WALL FLASHING HEIGHT IS 18" OR LESS

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
TPO SELF-ADHERING (ADHERED)

MULEHIDE®

TPO CURB TERMINATION W/ MEMBRANE UP AND OVER

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:

TP-TM-C601

REVISION DATE: 10/15/2026