

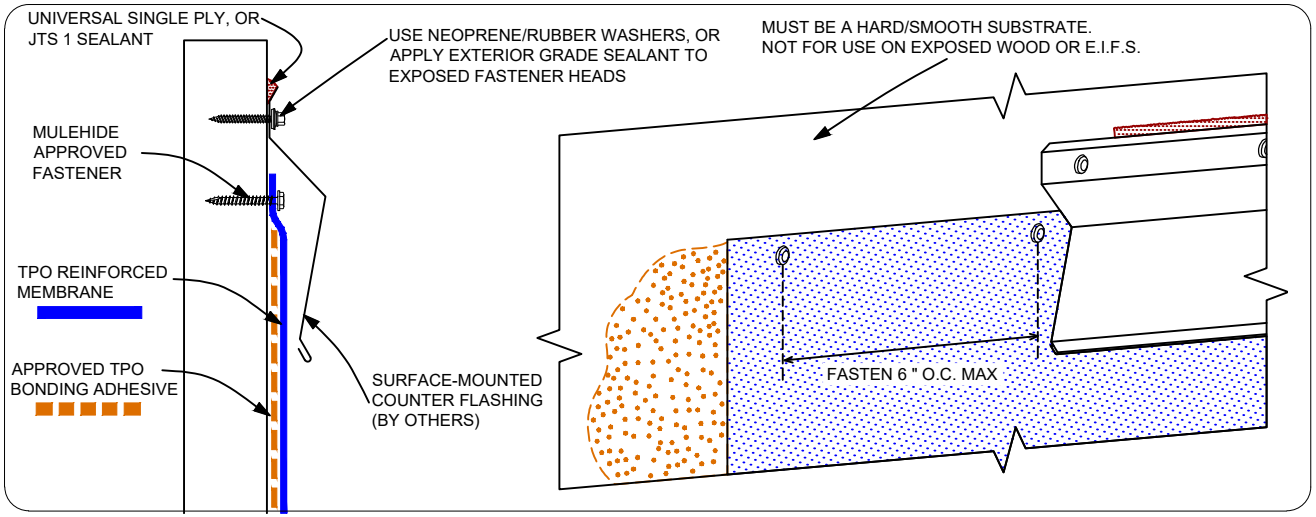


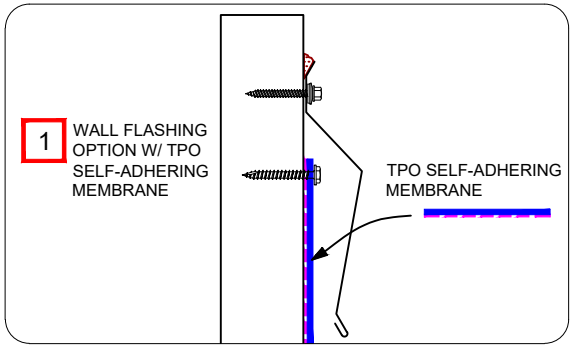

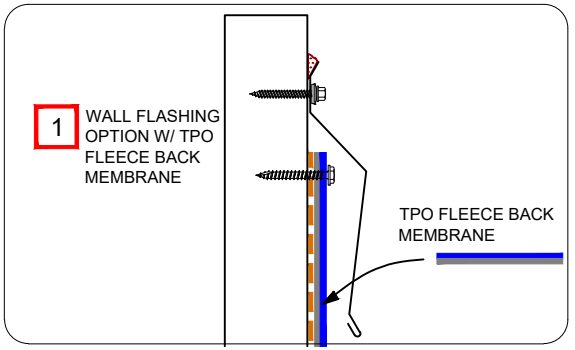

1. TPO REINFORCED MEMBRANE MAY ALSO BE USED AS WALL FLASHING ON PROJECTS WITH TPO FLEECE BACK OR SELF-ADHERING FIELD MEMBRANE
2. WALL FLASHING HEIGHT MUST BE A MINIMUM OF 8" HIGH WHEN POSSIBLE
3. BONDING ADHESIVE IS NOT REQUIRED IF THE WALL FLASHING HEIGHT IS 12" OR LESS
4. IF VERTICAL JOINTS (CONTROL JOINTS) ARE PRESENT, REFER TO DETAIL **TP-TM-C607** FOR ADDITIONAL REQUIREMENTS.
5. WHEN THE SUBSTRATE IS CONCRETE, SMOOTH BRICK, OR BLOCK MASONRY, THEN NAIL-DRIVE ZAMAC FASTENERS W/ CARBON STEEL DRIVE NAILS ARE APPROVED

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED)
TPO SELF-ADHERING (ADHERED)

MULEHIDE®

TPO WALL TERMINATION UP TO 10 YEAR WARRANTY

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS ACCEPTABLE FOR : **MAXIMUM 10 YEAR WARRANTY**

DETAIL NO.:

TP-TM-F603

REVISION DATE: 10/15/2026