


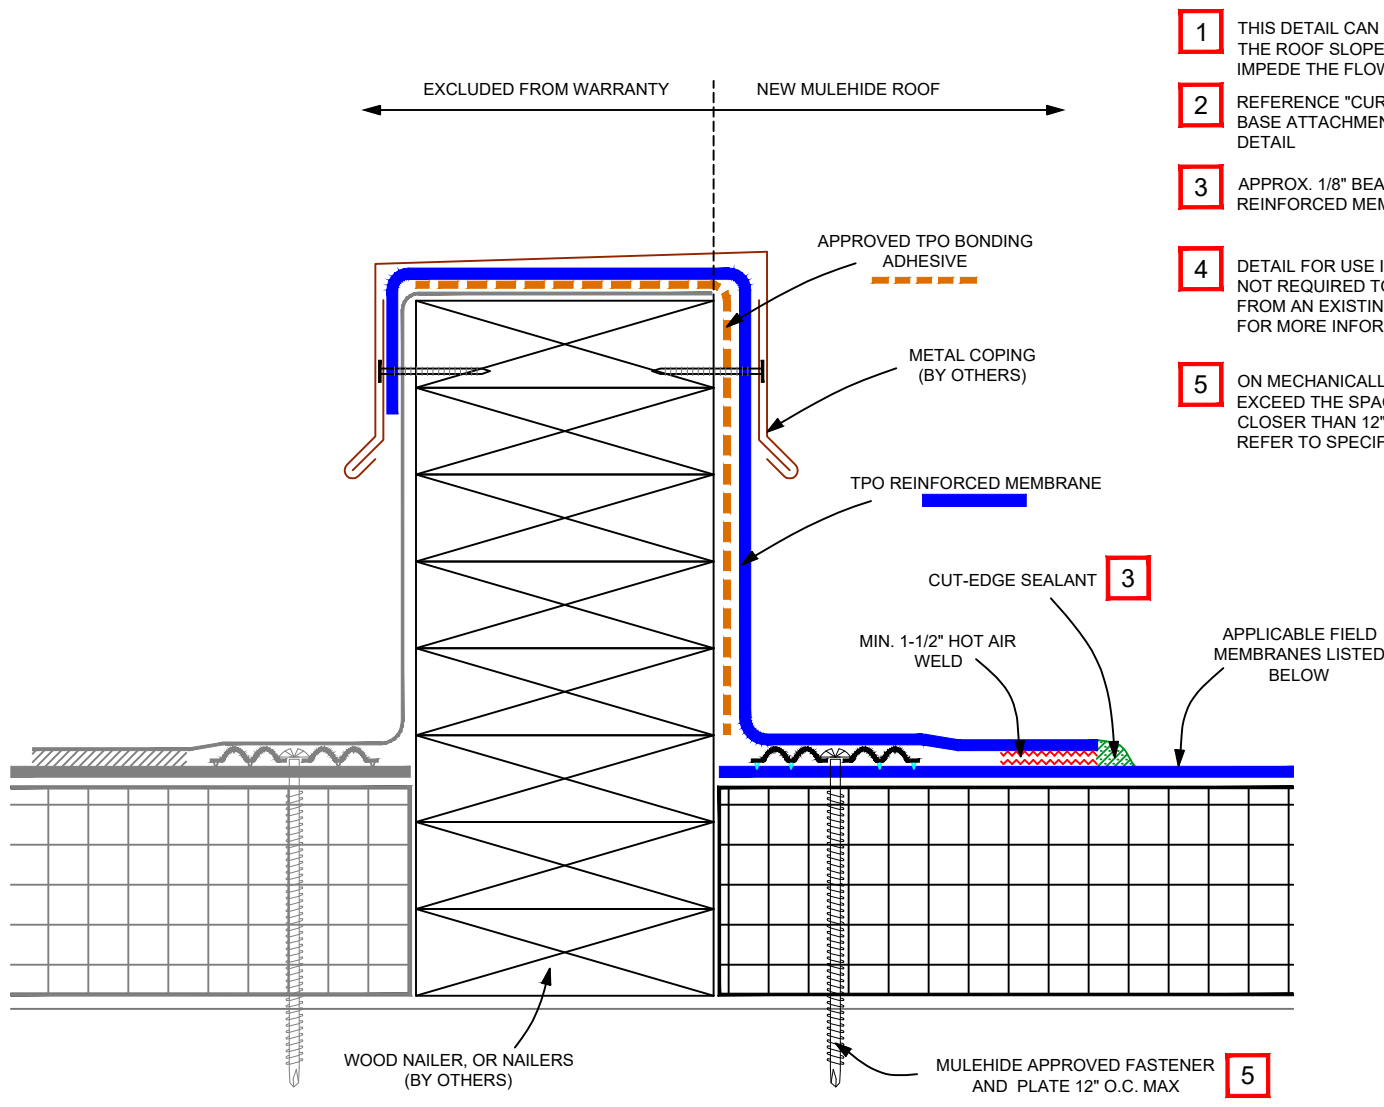

- 1 THIS DETAIL CAN ONLY BE USED WHEN THE CURB IS RUNNING PARALLEL TO THE ROOF SLOPE. ENSURE THAT THE LOCATION OF THE CURB WILL NOT IMPEDE THE FLOW OF WATER
- 2 REFERENCE "CURB OR WALL BASE ATTACHMENT" DETAILS FOR ADDITIONAL BASE ATTACHMENT OPTIONS FOR THE NEW MULEHIDE ROOF SIDE OF THIS DETAIL
- 3 APPROX. 1/8" BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF TPO REINFORCED MEMBRANE
- 4 DETAIL FOR USE IN RECOVER APPLICATIONS WHEN A COMPLETE TEAR OFF IS NOT REQUIRED TO PREVENT WATER INTRUSION INTO THE MULEHIDE SYSTEM FROM AN EXISTING OR ADJACENT ROOF. REFER TO MULEHIDE SPECIFICATIONS FOR MORE INFORMATION.
- 5 ON MECHANICALLY ATTACHED SYSTEMS - FASTENER SPACING MUST NOT EXCEED THE SPACING SPECIFIED FOR MEMBRANE ATTACHMENT, WHICH MAY BE CLOSER THAN 12" O.C. BASED ON THE PROJECT WARRANTY REQUIREMENTS. REFER TO SPECIFICATIONS.

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
 TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
 TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
 TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO: CURB WALL TIE-IN W/ CURB WALL
 PARALLEL TO SLOPE - ANY DECK TYPE

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
 ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-TE-C309

REVISION DATE: 8/24/2026