





# GRAVEL STOP WITH CONTINUOUS CLEAT

## FACE HEIGHT 6" OR LESS

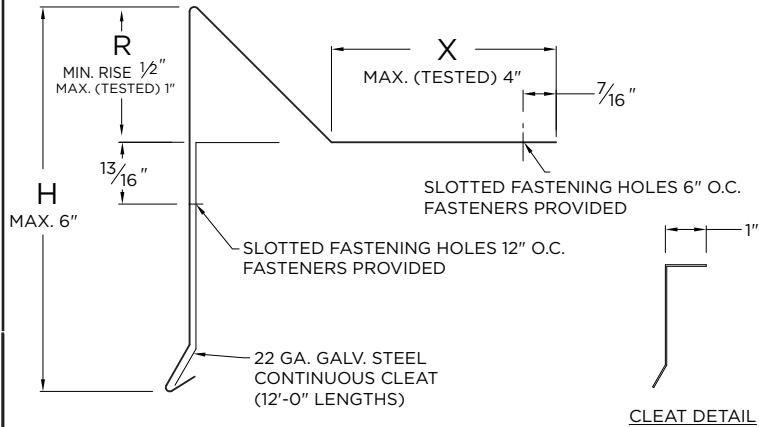

## FACE HEIGHT OVER 6"

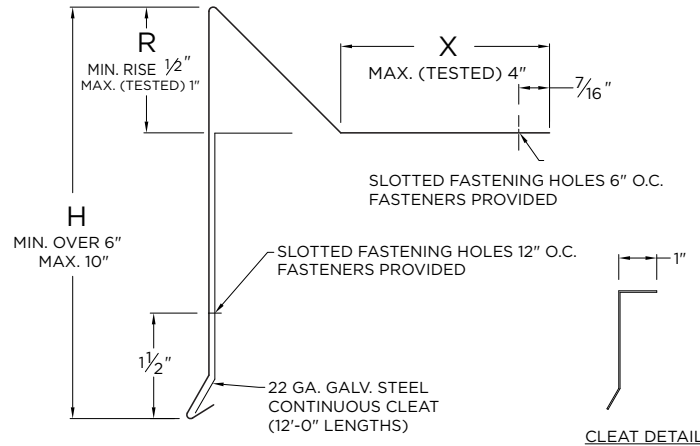

## DIMENSIONS

\_\_\_\_ (H) Face Height  
\_\_\_\_ (X) Flange Size  
\_\_\_\_ (R) Rise

## MATERIAL

- ☐ 24 Ga. Galv. Steel  
☐ 22 Ga. Galv. Steel  
☐ .040" Aluminum  
☐ .050" Aluminum  
☐ .063" Aluminum  
☐ OTHER: \_\_\_\_\_

Color: \_\_\_\_\_  
Finish: \_\_\_\_\_

**Substrate:** ☐ Wood  
If substrate is not given, wood fasteners will be provided. ☐ Masonry  
☐ Metal

## QUANTITIES

\_\_\_\_ Lineal Feet (12'-0" Lengths)  
\_\_\_\_ Outside Miter (90°)  
\_\_\_\_ Inside Miter (90°)

### Accessory Type:

- ☐ Quicklock (Default)  
☐ Welded (Surcharge)

## NOTES

- With Cleat-
- Includes concealed splice plates that must be field caulked to prevent water entry
  - Unless otherwise noted, fabrication of miters and accessories are provided with a non-penetrating quicklock joint, then factory sealed watertight
  - Welded miters and accessories require a minimum material thickness of .050"
  - For non-90 miters, see separate print approval
  - Product should be installed per provided installation instructions
  - ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 258 psf

## APPROVALS



**ANSI/SPRI/FM 4435/ES-1**  
Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

**Project Type:** \_\_\_\_\_

☐ By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

**MuleHide**  
1195 Prince Hall Drive  
Beloit, WI 53511  
800-786-1492  
www.mulehide.com  
**To submit a quote request, please contact your local TM or email mhquotes@metalera.com.**

SHT #: \_\_\_\_ of \_\_\_\_  
DATE: **04/10/25**  
DRN BY: **JJC**  
CKD BY: **MM**  
DWG #: 52010-42317  
REV: **B**