



NON 90° COPING MITERS

OUTSIDE MITER - OBTUSE

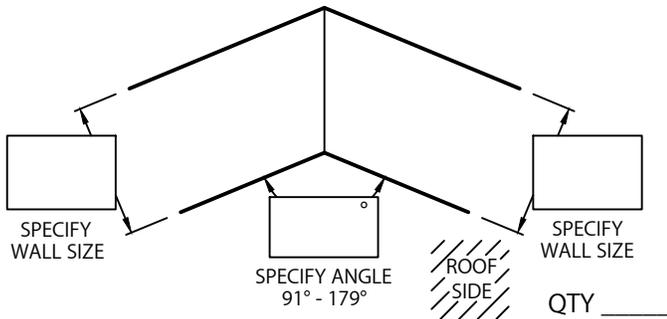


OUTSIDE MITER - ACUTE

INTERNAL USE

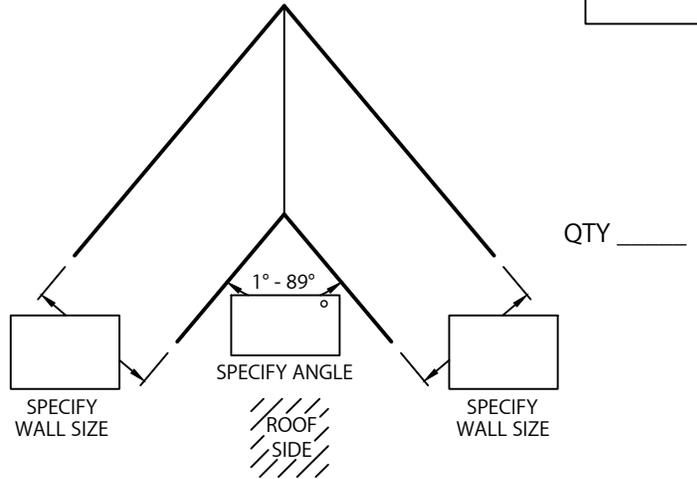


INSIDE MITER - OBTUSE

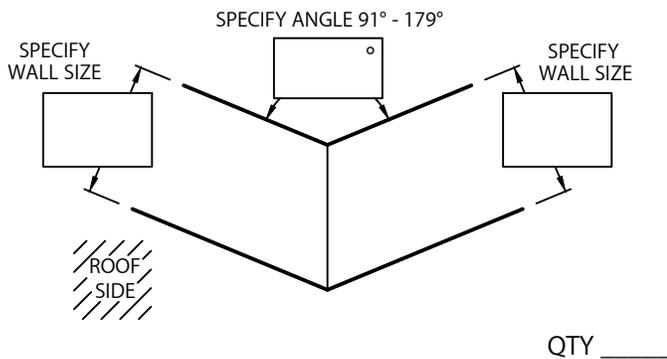

INSIDE MITER - ACUTE

INTERNAL USE

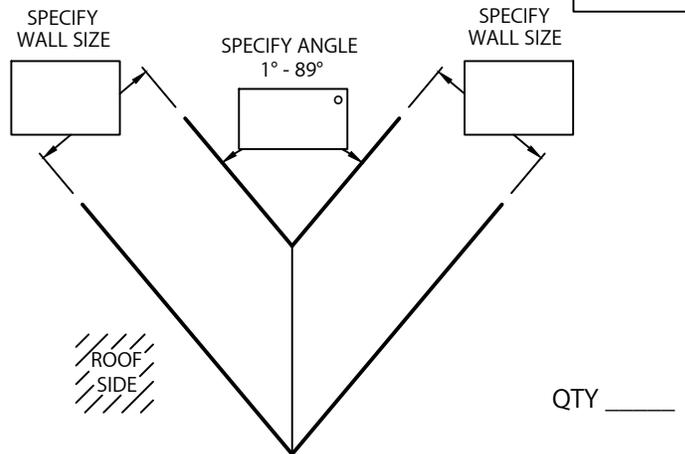

NOTES:

--- FOR CUSTOM LEG LENGTHS MODIFY DRAWING ABOVE.

- ① WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

MATERIAL:

- ___ 24 GA. GALVANIZED STEEL
- ___ 22 GA. GALVANIZED STEEL
- ___ .040" ALUMINUM
- ___ .050" ALUMINUM
- ___ .063" ALUMINUM
- ___ OTHER _____

SPECIFY ACCESSORY TYPE:

- WELDED ①
- QUICKLOCK

COLOR: _____

FINISH: _____

AUTHORIZED SIGNATURE: _____

APPROVED BY: _____

DATE: _____



PROJECT: _____

ARCHITECT: _____

ROOFING CONTRACTOR: _____

REPRESENTATIVE/DISTRIBUTOR: _____

1195 PRINCE HALL DRIVE
BELIOT, WI 53511
800-786-1492
WWW.MULEHIDE.COM

DATE: 11/6/24

DRN BY: LKW

CKD BY: MM


SHT.# _____ OF _____

DWG# 52011-44198

A

NON 90° COPING MITERS

RIGHT ANGLES ARE 90°
 ACUTE ANGLES RANGE FROM 1° - 89°
 OBTUSE ANGLES RANGE FROM 91° - 179°

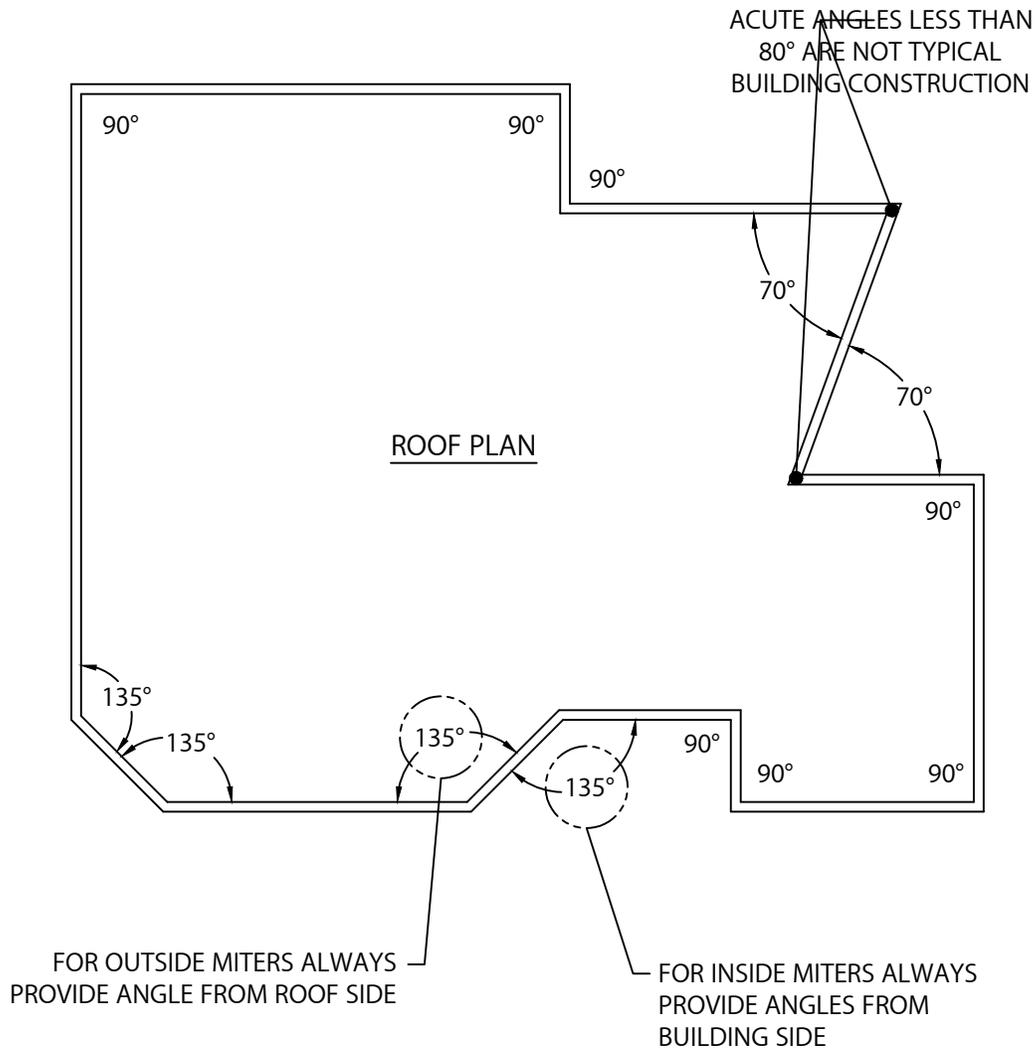

800-786-1492
 WWW.MULEHIDE.COM

1195 PRINCE HALL DRIVE
 BELIOT, WI 53511

DATE: 10/14/16	SHT.# ___ OF ___
DRN BY: JJC	DWG# 11011-1487
CKD BY: MM	