

FIGURE A
WALL BASE ATTACHMENT W/
CONTINUOUS SHEET


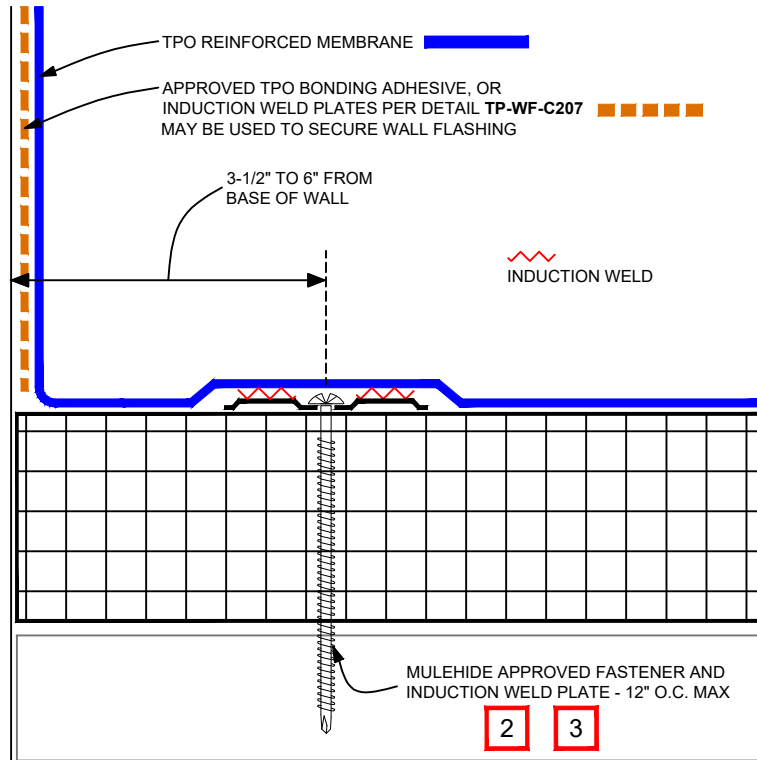


FIGURE B
CURB OR WALL BASE ATTACHMENT W/
SEPARATE FLASHING

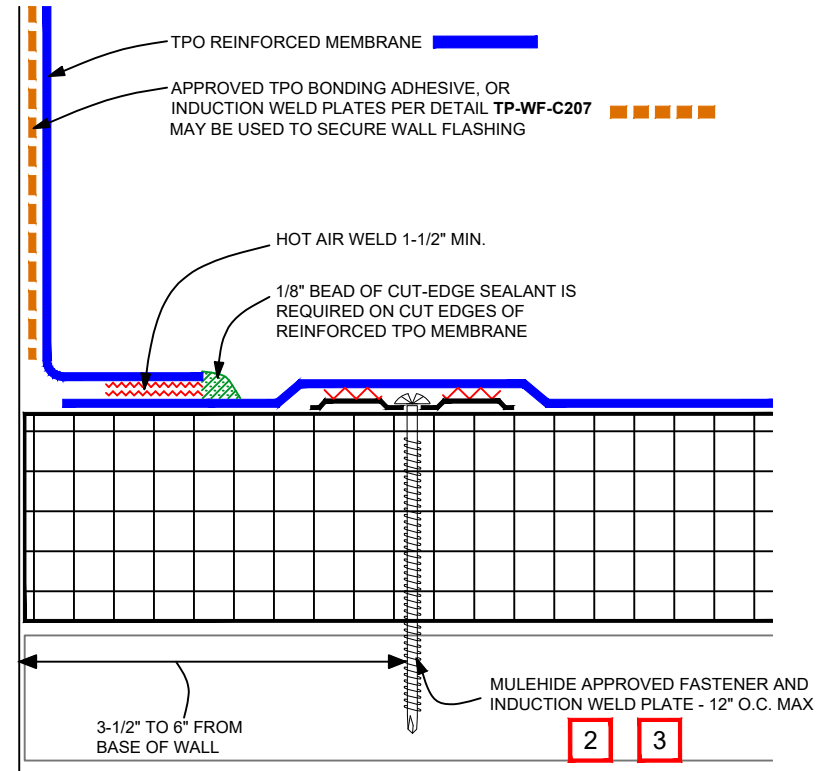

- 1** INDUCTION WELD CARDBOARD DISKS ARE REQUIRED UNDER INDUCTION WELD PLATES WHEN USING NON-FACED EPS (EXPANDED POLYSTYRENE) OR XPS (XTRUDED POLYSTYRENE) INSULATIONS.
- 2** NOTE THE FOLLOWING WHEN DETAIL EXISTS AT A PERIMETER PARAPET WALL:
 - FASTENER SPACING FOR BASE ATTACHMENT IS REQUIRED AT 6" O.C. WITH A WARRANTY EXCEEDING 90 MPH WIND SPEED COVERAGE OR FOR WARRANTIES GREATER THAN 20 YEARS.
- 3** EHD FASTENERS WITH INDUCTION WELD PLATES ARE APPROVED FOR WOOD AND STEEL (18 - 22 GA.) SUBSTRATES. REFER TO SPECIFICATIONS FOR ACCEPTABLE PULLOUT VALUES, OR FOR OTHER FASTENERS AND COMPATIBLE SUBSTRATES.

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (INDUCTION WELDED)

MULEHIDE

TPO IW PLATES FOR CURB OR WALL BASE ATTACHMENT

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-WF-C206

REVISION DATE: 8/24/2026