
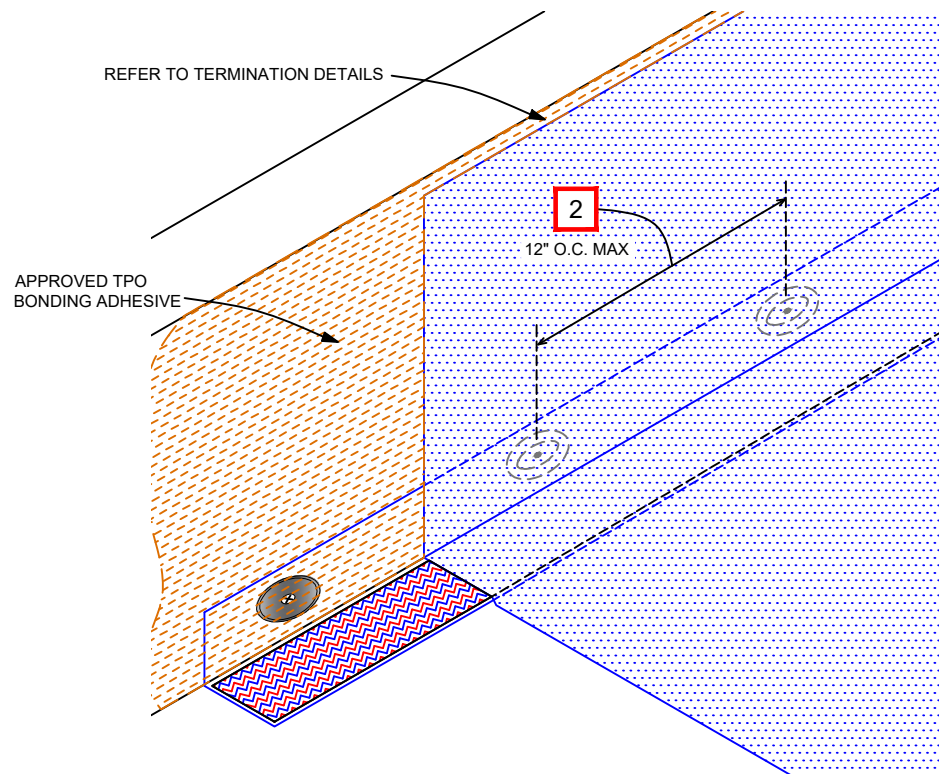


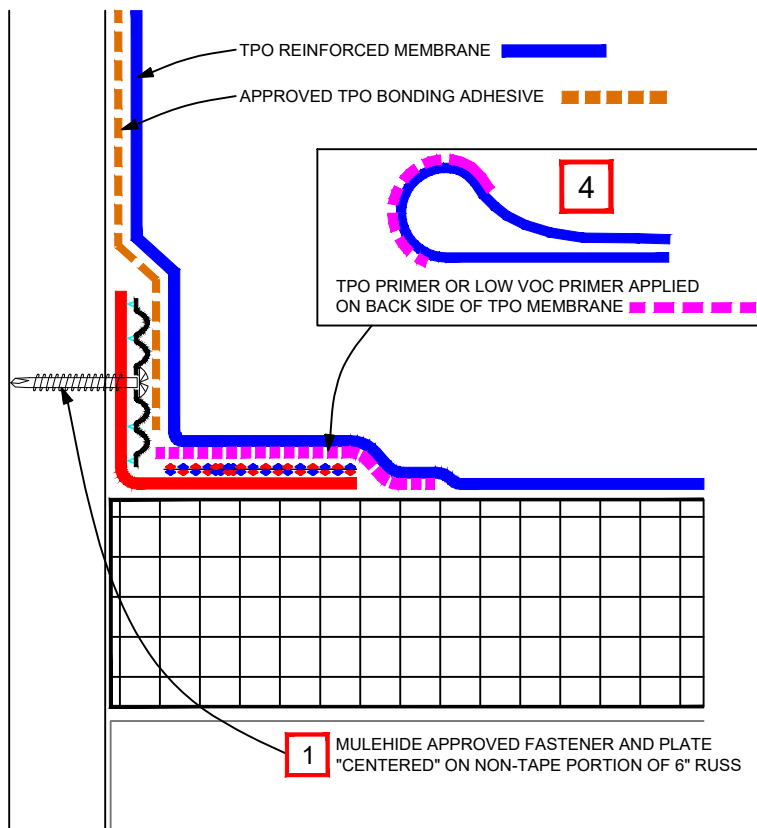

1 EHD FASTENERS WITH 2.4" SEAM PLATES ARE APPROVED FOR WOOD AND STEEL (18 - 22 GA.) SUBSTRATES. REFER TO SPECIFICATIONS FOR ACCEPTABLE PULLOUT VALUES, OR FOR OTHER FASTENERS AND COMPATIBLE SUBSTRATES.

2 NOTE THE FOLLOWING WHEN DETAIL EXISTS AT A PERIMETER PARAPET WALL:

- ON MECHANICALLY ATTACHED SYSTEMS - FASTENER SPACING MUST NOT EXCEED THE SPACING SPECIFIED FOR PERIMETER SHEETS, WHICH MAY BE CLOSER THAN 12" O.C. BASED ON THE WARRANTY REQUIREMENTS. REFER TO SPECIFICATIONS.
- FASTENER SPACING IS REQUIRED AT 6" O.C. WITH A WARRANTY EXCEEDING 90 MPH WIND SPEED COVERAGE OR FOR WARRANTIES GREATER THAN 20 YEARS.

3 ADJOINING SECTIONS OF PS RUSS SHALL BE SPACED NO MORE THAN 1" APART.

4 ENSURE A 2" HANDROLLER IS USED FOR ADEQUATE PRESSURE/CONTACT OF MEMBRANE TO PS RUSS.

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)

MULEHIDE

TPO REINFORCED BASE ATTACHMENT W/ 6" TPO PS RUSS
"VERTICAL" ATTACHMENT

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-WF-C209

REVISION DATE: 8/24/2026