



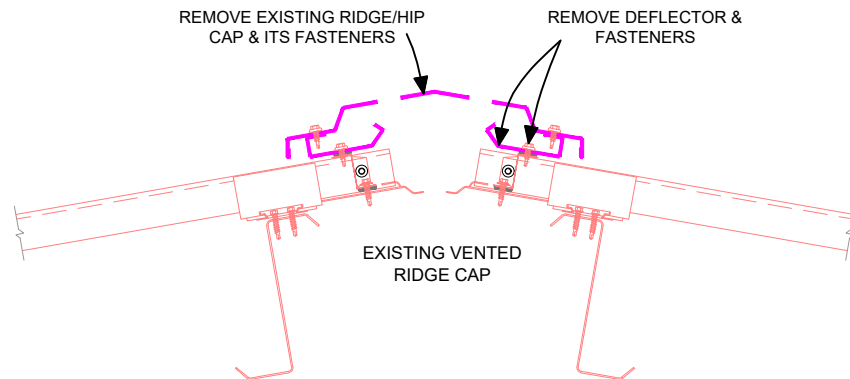

- 1** ON MECHANICALLY ATTACHED SYSTEMS - FASTENER SPACING MUST NOT EXCEED THE SPACING SPECIFIED, WHICH MAY BE CLOSER THAN 12" O.C. BASED ON THE WARRANTY REQUIREMENTS. REFER TO SPECIFICATIONS
- 2** MECHANICALLY ATTACHED METAL RETROFIT SYSTEMS W/ FIELD MEMBRANE ATTACHED TO PURLINS ARE APPROVED FOR WARRANTIES UP TO 30 YEARS: REFER TO DETAILS TP-LO-C1108, TP-LO-C1109, TP-LO-C1110. ALL OTHER METAL RETROFIT SYSTEM OPTIONS ARE LIMITED TO 20 YEAR MAX.
- 3** APPROX. 1/8" BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF TPO REINFORCED MEMBRANE

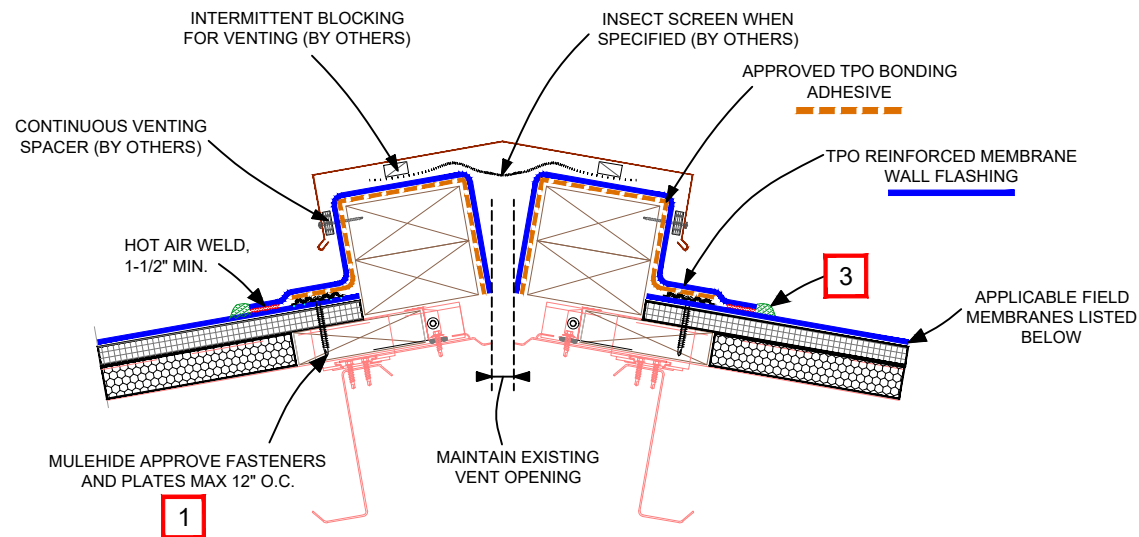

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
 TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED) (INDUCTION WELDED)
 TPO FLEECE BACK (ADHERED) (MECHANICALLY ATTACHED: 20 YR MAX)
 TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO NON-VENTED RIDGE ATTACHMENT: ALL TPO METAL
 RETROFIT ASSEMBLIES

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
 ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY**

DETAIL NO.:
TP-MS-C807

REVISION DATE: 8/24/2026