


POLY ISO

PACKAGING INFORMATION CROSS REFERENCE CHART

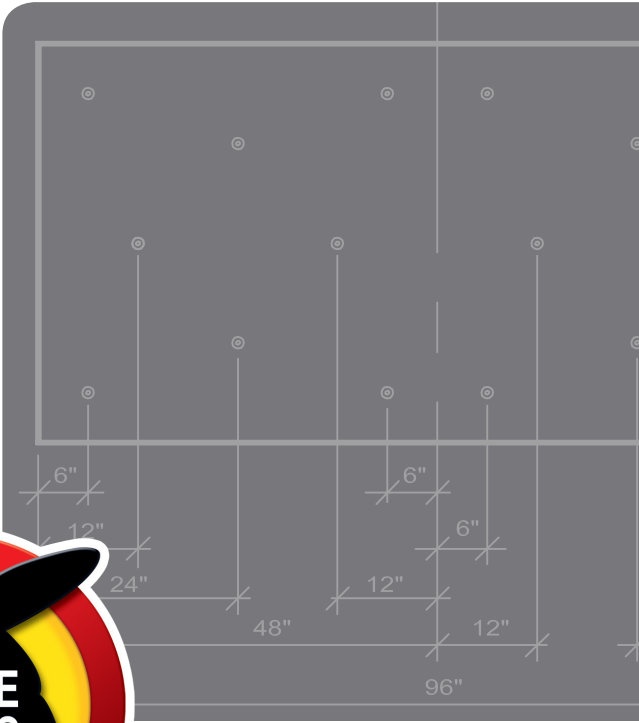

POLY ISO

PACKAGING INFORMATION CROSS REFERENCE CHART

FLAT-STOCK PACKAGING INFO

Size	LTTR Value	Pcs/pkg	4 x 4		4 x 8		WEIGHT PER SF	24 Skids 48' truck
			Sf/pkg	Sq/pkg	Sf/pkg	Sq/pkg		
1.0	5.7	48	768	7.68	1536	15.36	0.24	368.64
1.1	6.3	43	688	6.88	1376	13.76	0.26	330.24
1.2	6.8	40	640	6.40	1280	12.80	0.27	307.20
1.3	7.4	36	576	5.76	1152	11.52	0.29	276.46
1.4	8.0	34	544	5.44	1088	10.88	0.30	261.12
1.5	8.6	32	512	5.12	1024	10.24	0.32	245.76
1.6	9.1	30	480	4.80	960	9.60	0.34	230.40
1.7	9.7	28	448	4.48	896	8.96	0.35	215.04
1.75	10.0	27	432	4.32	864	8.64	0.36	207.36
1.8	10.3	26	416	4.16	832	8.32	0.37	199.68
1.9	10.8	25	400	4.00	800	8.00	0.38	192.00
2.0	11.4	24	384	3.84	768	7.68	0.40	184.32
2.1	12.0	22	352	3.52	704	7.04	0.42	168.96
2.2	12.6	21	336	3.36	672	6.72	0.43	161.28
2.3	13.2	20	320	3.20	640	6.40	0.45	153.60
2.4	13.8	20	320	3.20	640	6.40	0.46	153.60
2.5	14.4	19	304	3.04	608	6.08	0.48	145.92
2.6	15.0	18	288	2.88	576	5.76	0.49	138.24
2.7	15.6	17	272	2.72	544	5.44	0.51	130.56
2.8	16.2	17	272	2.72	544	5.44	0.53	130.56
2.9	16.8	16	256	2.56	512	5.12	0.54	122.88
3.0	17.4	16	256	2.56	512	5.12	0.56	122.88
3.1	18.0	15	240	2.40	480	4.80	0.57	115.20
3.2	18.6	15	240	2.40	480	4.80	0.59	115.20
3.3	19.2	14	224	2.24	448	4.48	0.61	107.52
3.4	19.9	14	224	2.24	448	4.48	0.62	107.52
3.5	20.5	13	208	2.08	416	4.16	0.64	99.84
3.6	21.1	13	208	2.08	416	4.16	0.65	99.84
3.7	21.7	12	192	1.92	384	3.84	0.67	92.16
3.8	22.3	12	192	1.92	384	3.84	0.68	92.16
3.9	23.0	12	192	1.92	384	3.84	0.70	92.16
4.0	23.6	12	192	1.92	384	3.84	0.72	92.16
4.1	24.2	11	176	1.76	352	3.52	0.73	84.48
4.2	24.9	11	176	1.76	352	3.52	0.75	84.48
4.3	25.5	11	176	1.76	352	3.52	0.76	84.48
4.4	26.1	10	160	1.60	320	3.20	0.78	76.80
4.5	26.8	10	160	1.60	320	3.20	0.80	76.80



TAPERED STOCK PACKAGING INFO

Slope	Label	Thickness	Ave. LTTR	BF/pc	Pc/bdl	BF/bdl	SF/bdl	Sq/bdl
1/8"	AA	0.5 - 1.0	4.5	12	64	768	1024	10.24
	A	1.0 - 1.5	7.8	20	38	760	608	6.08
	B	1.5 - 2.0	12	28	26	728	416	4.16
	C	2.0 - 2.5	16.2	36	20	720	320	3.20
	D	2.5 - 3.0	20.4	44	16	704	256	2.56
	E	3.0 - 3.5	24.4	52	14	728	224	2.24
	F	3.5 - 4.0	28.4	60	12	720	192	1.92
	FF	4.0 - 4.5	32.4	68	10	680	160	1.60
1/4"	X	0.5 - 1.5	6	16	48	768	768	7.68
	Y	1.5 - 2.5	14.3	32	24	768	384	3.84
	Z	2.5 - 3.5	22	48	16	768	256	2.56
	ZZ	3.5 - 4.5	25.8	64	12	768	192	1.92
	G	1.0 - 2.0	10	24	32	768	512	5.12
	H	2.0 - 3.0	18	40	18	720	288	2.88
	I	3.0 - 4.0	26	56	12	672	192	1.92
1/2"	Q	0.5 - 2.5	10	24	32	768	512	5.12
	QQ	2.5 - 4.5	12.2	56	12	672	192	1.92
	XX	1.0 - 3.0	14.3	32	24	768	384	3.84
3/16"	JJ	0.5 - 1.25	5.2	14	54	756	864	8.64
	KK	1.25 - 2.0	10.6	26	28	728	448	4.48
	LL	2.0 - 2.75	17.1	38	18	684	288	2.88
	MM	2.75 - 3.5	23	50	14	700	224	2.24
	J	1.0 - 1.75	8.6	22	34	748	544	5.44
	K	1.75 - 2.5	15.1	34	22	748	352	3.52
	L	2.5 - 3.25	20.7	46	16	736	256	2.56
	M	3.25 - 4.0	26.7	58	12	696	192	1.92
3/8"	S	1.0 - 2.5	12	28	26	728	416	4.16
	TT	2.0 - 3.5	10	44	16	704	256	2.56
	SS	0.5 - 2.0	7.8	20	36	720	576	5.76
1/16"	1	0.5 - 0.75	3.7	10	76	720	1152	11.52
	2	0.75 - 1.0	5.2	14	54	728	832	8.32
	3	1.0 - 1.25	6.8	18	42	720	640	6.40
	4	1.25 - 1.5	8.6	22	34	704	512	5.12
	5	1.5 - 1.75	10.6	26	28	728	448	4.48
	6	1.75 - 2.0	12.9	30	24	720	384	3.84
	7	2.0 - 2.25	15.2	34	22	680	320	3.20
	8	2.25 - 2.5	18.5	38	20	684	288	2.88



“The name trusted in roofing since 1906”

Check our website monthly for the latest updates & technical bulletins.

National Support Center • 1195 Prince Hall Drive • Beloit, WI 53511
tel. 608.365.3111 • fax. 608.365.7852