



**Description:**

The EclipsEdge system may be used as a perimeter flashing for single-ply roofing systems. The system consists of a base and a snap-on metal cover.

- Manufactured from various metals (see chart below) in 10' lengths; widths ranging from 4" to 13".
- Not sensitive to different mil thickness
- Ready-to-assemble inside and outside corners are available.

Contact Mule-Hide to request a color chart, samples and information regarding custom metals and finishes.

**Energy Efficiency:**

LEED® and ENERGY STAR® compliant

**Installation:**

1. A wood nailer is required.
2. This nailer should be attached to the wall in accordance with ANSI/SPRI ES-1 3.9.
3. Install in accordance with Mule-Hide Detail MHSM-3580
4. Any deviation from the requirements set forth in the detail drawings must be pre-approved, in writing, by the Mule-Hide Technical Department.

**Codes and Standards:**


- ANSI/SPRI ES-1 Compliant with 4" to 13" base and cover

**Warranty:**

Mule-Hide metal accessories are eligible for warranty coverage when properly installed as part of a Standard or Premium warrantable system. Please visit our Web site or call us for more information.

**Technical Services:**

Product samples, detail sheets, color chips, and a color chart are available for your submittal package. For assistance with questions or submittals, contact your local representative or call Mule-Hide.

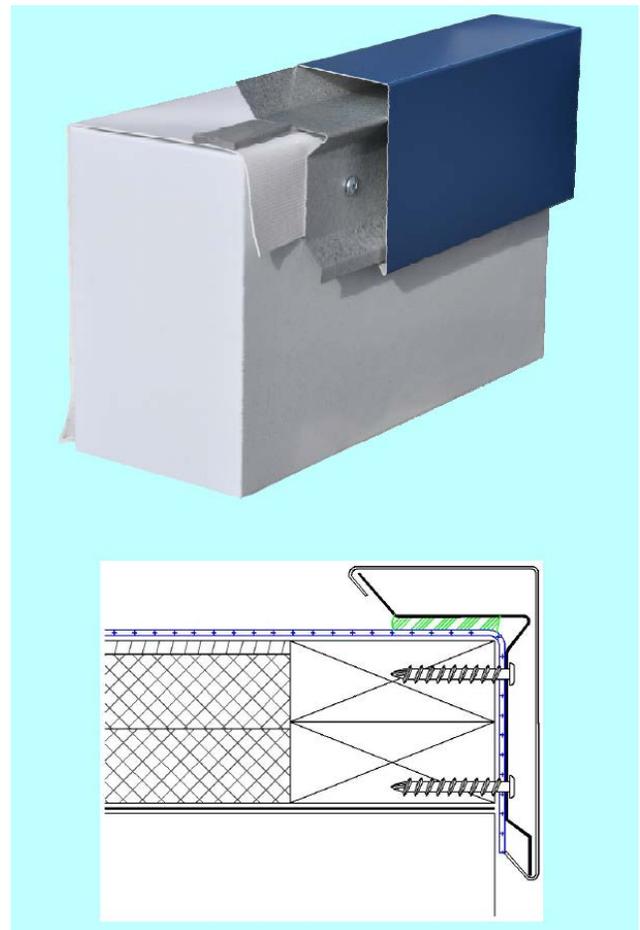

Base		
Material	Gauge	Finish
Aluminum	.050	N/A
Galvalume Plus	22-gauge	N/A

Cover*		
Material	Gauge	Finish
Aluminum	.040	Mill or Kynar®
Stainless Steel	24-gauge	N/A
Bonderized Steel	24-gauge	N/A
Galvalume	24-gauge	Mill or Kynar®

\*9" to 13" widths available in .040 aluminum only