



**Description:**

The Gravel Stop provides an architectural, visually-attractive termination with a canted edge. Membrane coated roof flange enables welding a separate skirt to both the flange and the installed roof membrane to provide a watertight seal. A version utilizing uncoated metal roof flanges is available for use in an EPDM roofing system

- Fabricated in 10' lengths; 2" – 8" widths. Both the TPO and PVC versions come with a factory welded 6" skirt attached.
- Profiles can be custom-fabricated to meet most specifications.
- Can be fabricated to accommodate various roof pitches and mansards with a maximum face size of 8".

Contact Mule-Hide to request a color chart, samples and information regarding custom metals and finishes.

**Energy Efficiency:**

LEED® and ENERGY STAR® compliant; 100% recyclable.

**Installation:**


1. A wood nailer is required.
2. This nailer should be attached to the wall in accordance with ANSI/SPRI ES-1 3.9.
3. Install in accordance with Mule-Hide details.
4. Any deviation from the requirements set forth in the detail drawings must be pre-approved, in writing, by the Mule-Hide Technical Department.

**Warranty:**

Mule-Hide metal accessories are eligible for warranty coverage when properly installed as part of a Standard or Premium warrantable system. Please visit our Web site or call us for more information.

**Technical Services:**

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local representative or call Mule-Hide.

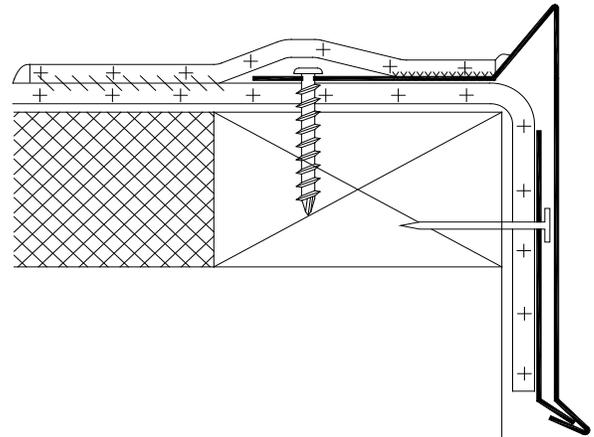

Material	Gauge	Finish
Galvanized	24-gauge	PVC/TPO
Aluminum	.040	Mill or Kynar®
Stainless Steel	24-gauge	N/A
Bonderized Steel	24-gauge	N/A
Galvalume	24-gauge	Mill or Kynar®
Copper	16 oz.	Mill