



Product Data Sheet Skirted Drip Edge

Description:

The Skirted Drip Edge provides maximum water flow from roof decks while providing an architectural, visually-attractive termination. Factory welded skirt flashing enables welding to the field membrane without installing separate stripping membranes. Providing a watertight seal, and decreased installation times.

- Fabricated in 10' lengths
- Face sizes from 2" – 8" available.
- Available in either TPO or PVC versions, both come with a factory welded 6" skirt.
- Profiles can be custom-fabricated to meet most specifications.
- Can be fabricated to accommodate various roof pitches and mansards with a maximum face size of 8".

Contact Mule-Hide to request samples.

Energy Efficiency:

LEED® and ENERGY STAR® compliant; 100% recyclable.

Installation:


1. A wood nailer is required.
2. This nailer should be attached to the wall in accordance with ANSI/SPRI ES-1 3.9.
3. Install in accordance with Mule-Hide details.
4. Any deviation from the requirements set forth in the detail drawings must be pre-approved, in writing, by the Mule-Hide Technical Department.

Warranty:

Mule-Hide metal accessories are eligible for warranty coverage when properly installed as part of a Standard or Premium warrantable system. Please visit our Web site or call us for more information.

Technical Services:

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local representative or call Mule-Hide.

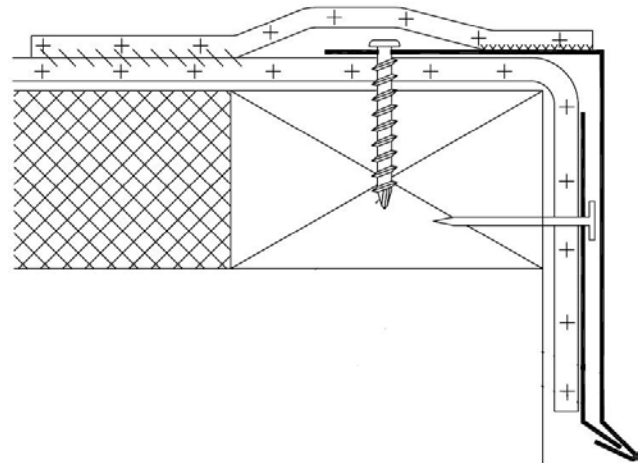

Material	Gauge	Finish
Galvanized	24-gauge	PVC Clad Metal
Galvanized	24-gauge	TPO Clad Metal